

Quantitative evaluation of ball-milling effects
on the hydrolysis of cellulose catalysed by
activated carbon†Mizuho Yabushita,^{ab} Hirokazu Kobayashi,^a Kenji Hara^a and Atsushi Fukuoka^{*a}Cite this: *Catal. Sci. Technol.*, 2014,
4, 2312Received 11th February 2014,
Accepted 11th March 2014

DOI: 10.1039/c4cy00175c

www.rsc.org/catalysis

The synthesis of glucose from cellulose is a critical roadblock for establishing a new sustainable cycle of biorefinery to produce bio-based and environmentally-benign chemicals. We have previously demonstrated that the pre-treatment ball-milling of solid cellulose and a solid catalyst (mix-milling) drastically improves the yield of glucose and oligosaccharides; however, the effect of this type of ball-milling has not been quantitatively evaluated. In this study, we performed several model reactions and found that the mix-milling method drastically enhanced the solid–solid reactions, such as the hydrolysis of insoluble cellulose to soluble oligomers on the solid catalyst, but not liquid–solid reactions. The kinetic study indicated that the rate constant of hydrolysis of cellulose to oligomers using mix-milling was 13-fold higher than that using individual milling. Owing to the fast depolymerisation of cellulose, we achieved a 72% yield of glucose with 97% conversion of cellulose and 74% selectivity at 418 K.

1. Introduction

Cellulose is a potential alternative to petrol as the biomass is abundant, non-edible and a renewable carbon resource.¹ The monomer of cellulose, glucose, is an attractive precursor to valuable chemicals such as plastics, surfactants, high-octane-number gasoline, diesel fuels and medicines.² In addition, cello-oligosaccharides are health-promoting foods that improve bowel functions.³ Accordingly, the reaction route of cellulose to glucose and oligosaccharides (Scheme 1) should be the mainstream in the next-generation biorefinery, which substitutes current processes using food biomass; however, realising this vision has been hampered by the recalcitrance of cellulose.

The hydrolysis of cellulose has been performed with various solid catalysts, *e.g.*, immobilised sulphonic acids,⁴ supported ruthenium catalysts,⁵ carbons with weak acid sites,^{5,6} highly-acidic silica,⁷ HNbMoO_6 ,⁸ and some hardly-soluble heteropoly acids,⁹ as heterogeneous catalysts are advantageous over homogeneous ones in terms of easy separation from products. It is surprising that weakly-acidic carbons ($\text{p}K_{\text{a}} > 3$) can hydrolyse cellulose, because usual acids with a $\text{p}K_{\text{a}}$ larger than


–3 are ineffective for this reaction.¹⁰ This unexpected ability of carbons may be ascribed to the good affinity between carbon and cellulose, which has been demonstrated in model adsorption experiments using cello-oligosaccharides.¹¹ It has been reported that surface-immobilised β -glucans on silica and alumina are depolymerised regardless of their weak acidity ($\text{p}K_{\text{a}} \sim 7$), whereas these weak acids do not work for the hydrolysis of free cellulose (that is, non-immobilised β -glucans).¹² These results indicate that even weak acids can function by making a good contact between the substrate and the catalyst. To increase the contact between the solid catalyst and solid cellulose, cellulose and a weakly-acidic carbon catalyst (K26) were ball-milled together, denoted “mix-milling”.^{6a} The hydrolysis reaction of this mix-milled sample provided a 90% yield of glucose and oligosaccharides in total at 453 K in water, while that of individually ball-milled cellulose and K26 gave only 13% yield under the same conditions. This enhancement was not due to the mechanocatalytic hydrolysis¹³ during the ball-milling process, and thus the improvement of the solid–solid contact was proposed. Limited collision between the solid catalyst and solid substrate is a common issue for this type of reaction; however, these results suggest that this drawback can be overcome in some cases. Understanding how the mix-milling changes the reactions would be useful for the design of a more efficient system. Herein, the purpose of this study is the quantitative assessment of the mix-milling effect on cellulose hydrolysis by means of kinetics and model experiments.

Another remaining subject in the previous report is that the use of trace HCl is necessary for the high-yielding synthesis of

^a Catalysis Research Centre, Hokkaido University, Kita 21 Nishi 10, Kita-ku, Sapporo, Hokkaido 001-0021, Japan. E-mail: fukuoka@cat.hokudai.ac.jp

^b Division of Chemical Sciences and Engineering, Graduate School of Chemical Sciences and Engineering, Hokkaido University, Kita 13 Nishi 8, Kita-ku, Sapporo, Hokkaido 060-8628, Japan

† Electronic supplementary information (ESI) available: Pictures of residue and reaction solutions, HPLC charts and results of hydrolysis of individually-milled cellulose. See DOI: 10.1039/c4cy00175c

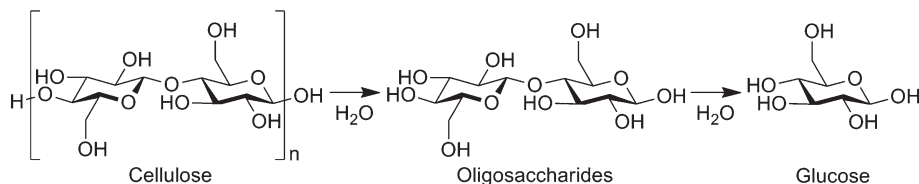

Scheme 1 Hydrolysis of cellulose to glucose.

glucose.^{6a} The yield of glucose was at most 57% (58% selectivity) in the reaction in pure aqueous medium under severe conditions at 503 K with an autogenous pressure of 2.8 MPa. Accordingly, we also aimed for the selective synthesis of glucose, instead of a mixture of glucose and oligosaccharides, under mild conditions in pure water.

2. Experimental

2.1. Reagents

Microcrystalline cellulose (Avicel, 102331) was purchased from Merck and distilled water from Wako Pure Chemical Industries. The catalysts used in this work were an alkali-activated carbon (denoted K26),^{6a} a steam-activated carbon (BA, Ajinomoto Fine Techno, denoted BA), another steam-activated carbon (SX Ultra, Norit, denoted SX), a sulphonic acid cation exchange resin (Amberlyst 70, Organo, denoted Amberlyst), H-ZSM-5 [Si/Al = 45, JRC-Z5-90H, Catalysis Society of Japan (CSJ)], H-MOR (Si/Al = 45, JRC-Z-HM90, CSJ), SiO₂ (Q-6, Fuji Silysia Chemical), SiO₂-Al₂O₃ (grade 135, Sigma-Aldrich) and TiO₂ [JRC-TIO-4(2), CSJ]. Amberlyst was used after crushing in a mortar and drying overnight in an oven at 383 K. Other reagents were obtained from Kanto Chemical and Wako Pure Chemical Industries.

2.2. Milling of cellulose and cellobiose

Microcrystalline cellulose (10 g) was ball-milled with alumina balls (1.5 cm, 2 kg) in a ceramic pot (3.6 L) at 60 rpm for 48 h. Mix-milling of cellulose and solid catalysts was carried out in the same type of pot in the presence of alumina balls. Microcrystalline cellulose (10 g) and solid catalysts (1.54 g) [substrate/catalyst (S/C) ratio based on weight = 6.5] were added into the pots and were milled together at 60 rpm for 48 h. The amount of catalyst was reduced to 1.46 g for the mix-milling of cellobiose (S/C = 6.8). The ball-milled samples were analysed by powder X-ray diffraction (XRD; Rigaku MiniFlex, Cu K α).

2.3. Catalytic reactions

The hydrolysis of cellulose was conducted in a hastelloy C22 high-pressure reactor (OM Lab-Tech, MMJ-100, 100 mL). Ball-milled cellulose (324 mg), catalyst (50 mg) and distilled water (40 mL) were charged into the reactor. For the hydrolysis of mix-milled samples, 374 mg of the sample [containing cellulose (324 mg) and catalyst (50 mg)] and distilled water (40 mL) were used. The reactor was heated to 453 K in 11 min (or 473 K in 13 min) and then cooled to 323 K by blowing air

after the reaction for *ca.* 15 min. The suspension was separated by centrifugation and decantation. The products in the aqueous phase were analysed by high-performance liquid chromatography [HPLC; Shimadzu LC10-ATVP with refractive index and ultraviolet (210 nm) detectors] with a Shodex SUGAR SH-1011 column ($\varnothing 8 \times 300$ mm, mobile phase: water at 0.5 mL min^{-1} , 323 K) and a Phenomenex Rezex RPM-Monosaccharide Pb⁺⁺ column ($\varnothing 7.8 \times 300$ mm, mobile phase: water at 0.6 mL min^{-1} , 343 K). An absolute calibration method was used for the calculation of product yields. The conversion of cellulose was determined based on the weight difference of the solid part before and after reaction. The amount of organic carbons in the reaction solution was quantified by the measurement of the total organic carbon (TOC; Shimadzu TOC-V_{CSN}) for the determination of conversion when the catalyst was partially dissolved in water after the reaction (see section 3.1).

The hydrolysis of the mix-milled samples at a lower temperature (≤ 423 K) was carried out in a pressure-resistant glass tube (15 mL, Ace Glass). Mix-milled sample (94 mg [containing cellulose (81 mg) and catalyst (13 mg)]) and distilled water (10 mL) were charged into the tube. The tube was immersed in an oil bath at a certain temperature for a designated length of time. The product analysis was performed using the same procedure described above.

The hydrolysis of cellobiose was conducted in a hastelloy C22 high-pressure reactor. Cellobiose (342 mg), catalyst (50 mg) and distilled water (40 mL) were charged into the reactor. The temperature was raised to 463 K for 11 min and then the reactor was rapidly cooled to 323 K by blowing air. The product yield and conversion were determined by HPLC.

3. Results and discussion

3.1. Hydrolysis of mix-milled cellulose

The activities and properties of various solid catalysts were studied in the hydrolysis of cellulose using the mix-milling pre-treatment method. As a control, the hydrolysis of ball-milled cellulose without catalyst gives a poor reaction result (7.9% yield of glucans, Table 1, entry 1), and all the catalysts tested in this study provide low yields of the products without mix-milling (Table S1†). Thus, the hydrolysis of cellulose was performed after ball-milling together with various solid catalysts (Table 1, entries 2–10). K26 produced water-soluble glucans in 90% yield [glucose (20%) and oligosaccharides (70%)] with 97% selectivity (Table 1, entry 2), as reported previously.^{6a} The other products were fructose (0.6%), mannose (0.7%),

Table 1 Hydrolysis of cellulose after mix-milling pre-treatment^a

Entry	Catalyst	T/K	Time/h	Conv./%	Yield based on carbon/%C						
					Glucan		By-product				
					Glc ^b	Olg ^c	Frc ^d	Man ^e	Lev ^f	HMF ^g	Others ^h
1 ^{6a}	None ⁱ	453	0.33	12	1.3	6.6	0.2	0.2	<0.1	0.2	3.4
2 ^{6a}	K26	453	0.33	93	20	70	0.6	0.7	0.7	1.0	0.1
3	BA	453	0.33	35	6.7	27	0.7	0.7	0.2	0.2	0.2
4	SX	453	0.33	24	4.2	18	0.8	0.5	0.1	0.3	0.1
5	Amberlyst	453	0.33	>99	82	1.9	0.5	1.4	2.6	2.8	8.8
6	H-ZSM-5	453	0.33	19	4.0	11	0.4	0.3	0.1	0.2	3.2
7	H-MOR	453	0.33	21	4.9	11	0.4	0.3	0.2	0.5	4.0
8	SiO ₂ -Al ₂ O ₃	453	0.33	6.8	0.9	4.8	0.2	0.2	<0.1	0.2	0.5
9	SiO ₂	453	0.33	16	3.4	11	0.3	0.3	0.1	0.3	0.1
10	TiO ₂	453	0.33	13	1.6	7.1	0.5	0.3	<0.1	0.4	2.6
11	K26 ^j	418	24	97	72	2.8	1.4	1.5	1.4	4.9	13

^a Conditions: mix-milled sample (374 mg [containing cellulose (324 mg) and catalyst (50 mg)]), distilled water (40 mL). ^b Glucose. ^c Water-soluble oligosaccharides (degree of polymerisation = mainly 2–6). ^d Fructose. ^e Mannose. ^f Levoglucosan. ^g 5-Hydroxymethylfurfural. ^h (Conversion) – (total yield of the characterised products). ⁱ Ball-milling and hydrolysis of cellulose were conducted without catalysts. ^j Conditions: mix-milled cellulose (94 mg [containing cellulose (81 mg) and catalyst (13 mg)]), distilled water (10 mL).

levoglucosan (0.7%), 5-hydroxymethylfurfural (1.0%) and unidentified compounds (0.1%). The solid containing the catalyst K26 was easily separated by filtration after the reaction (Fig. S1†). Other carbons, BA and SX, produced glucans in 34% and 22% yields, respectively (Table 1, entries 3 and 4), and they were less active than K26. Amberlyst gave the highest glucose yield (Table 1, entry 5, 82%); however, mechanocatalytic hydrolysis occurred in this case owing to the strong acidity of the resin. After ball-milling cellulose and Amberlyst together, >99% of cellulose was dissolved as various kinds of oligomers^{13c} in water at room temperature. Moreover, Amberlyst was completely degraded after the hydrolysis reaction; Amberlyst was not recovered by centrifugation at 4600g or filtration using a membrane (0.1 µm mesh) and the colour of the filtrate was brown (Fig. S2†). Since the Tyndall effect was hardly observed, Amberlyst presumably dissolved in water during the reaction, which was in contrast to the behaviour of K26 described above (Fig. S1†). The other catalysts tested (H-ZSM-5, H-MOR, SiO₂-Al₂O₃, SiO₂ and TiO₂) were almost inactive (Table 1, entries 6–10), and these catalysts except TiO₂ partially dissolved during the reaction (Fig. S3†).

The correlation between the crystallinity of cellulose and the result of respective catalytic reaction was estimated because the decomposition of the crystalline structure of cellulose by milling treatment improves the reactivity of cellulose.¹⁴ The results of the XRD measurements showed no peak for crystalline cellulose for all the milled samples (Fig. 1), indicating that cellulose was in the amorphous form in these samples. Thus, the difference in the catalytic performance is not ascribed to the nature of cellulose but to the hydrolytic activities of the catalysts and the contact between the catalysts and cellulose. We conclude that K26 is the best solid catalyst for the hydrolysis of cellulose under the reaction conditions employed.

To further improve the glucose yield, we optimised the reaction conditions for the hydrolysis of mix-milled cellulose

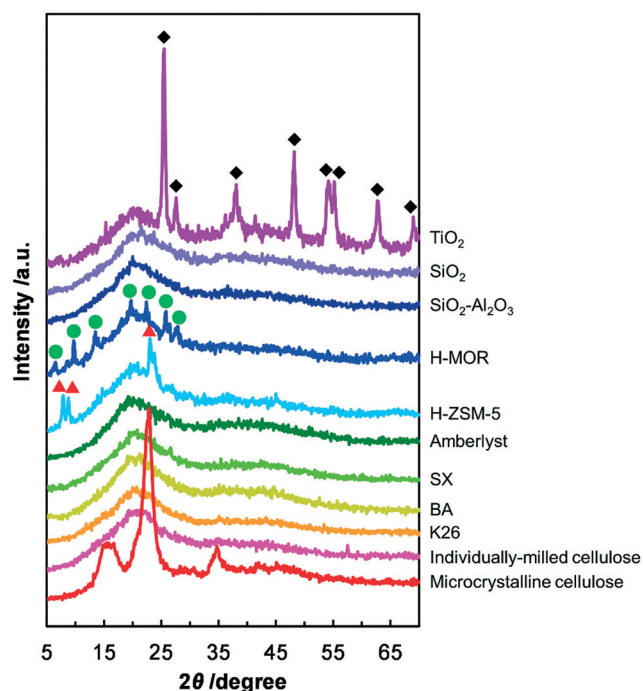


Fig. 1 XRD patterns of mix-milled samples containing cellulose and the solid catalysts. The peaks marked with red triangles, green circles and black diamonds are from H-ZSM-5, H-MOR and TiO₂, respectively.

containing K26. The yield of glucose reached 72% with 97% conversion of cellulose and 74% selectivity under the milder conditions (418 K, 24 h, 0.4 MPa of autogenous pressure; Table 1, entry 11) than that in the previous report^{6a} (503 K, 2.8 MPa, 57% yield, 58% selectivity), and the lower temperature suppressed the decomposition of glucose. The high glucose yield under the mild reaction conditions indicates the potential applicability of this catalytic process in the hydrolysis of cellulose.



3.2. Effect of mix-milling pre-treatment

The roles of mix-milling were evaluated in model reactions using soluble catalysts or substrates. If the major role of mix-milling pre-treatment is the improvement of the solid–solid contact, then the promotional effect of mix-milling will disappear since the use of a soluble substrate or catalyst gives a liquid–solid reaction. Therefore, we carried out the mix-milling and hydrolysis for two types of substrate–catalyst combinations: (i) cellobiose (water-soluble substrate) and K26 (insoluble catalyst) and (ii) cellulose (insoluble substrate) and benzoic acid (soluble catalyst). We chose benzoic acid as a soluble catalyst because this compound is a typical model for the active sites¹⁵ of weakly-acidic carbons. Note that a typical soluble catalyst, H₂SO₄, is not suitable for this solid–solid mixing because H₂SO₄ itself is liquid and furthermore this strong acid depolymerises cellulose during the mix-milling treatment.^{13b,c}

For combination (i), the hydrolysis of cellobiose by K26 was performed with or without the mix-milling pre-treatment. As expected, the reactions provided almost the same yield of glucose (Table 2, entries 12 and 13). In both cases, cellobiose of ca. 90% dissolved into water at room temperature, and the remaining part (ca. 10%) adsorbed onto K26.^{11c} Therefore, the contact between K26 and cellobiose in both cases were the same during the hydrolysis reaction. Likewise, combination (ii) indicated no positive effect of mix-milling, in which almost no difference in product yields was observed with or without mix-milling (Table 2, entries 14 and 15). Benzoic acid completely dissolved in water at the reaction temperature. In contrast, the mix-milling pre-treatment drastically enhanced the hydrolysis with the combination of cellulose and K26; the yield of glucans was increased seven times, from 13% to 90% (Table 2, entries 2 and 16). Mix-milling pre-treatment accelerates solid–solid reactions but not liquid–solid ones. These results indicate that the predominant role of the mix-milling is the improvement of solid–solid contacts.

A kinetic study of the hydrolysis of cellulose was conducted to quantitatively estimate the effect of mix-milling, in which 418 K was chosen as the optimised temperature to synthesise glucose (see section 3.1) and accurately estimate the kinetic parameters under the steady state. Fig. 2 shows the time-course of the depolymerisation of mix-milled cellulose containing K26.


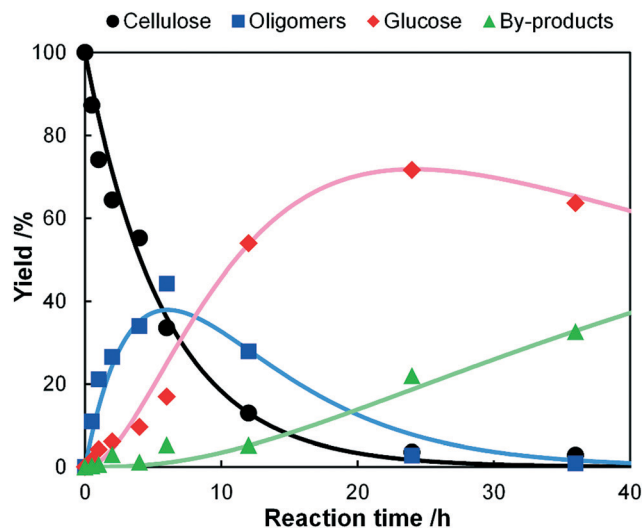


Fig. 2 Time-course of hydrolysis of mix-milled cellulose containing K26 at 418 K. The dots show the experimental data and the lines are the results of kinetic simulations based on eqn (6)–(9).

The amount of cellulose (black circles) decreased, whereas that of oligosaccharides (blue squares) increased in the initial period. The yield of oligomers was maximised at 6 h (44%) and then gradually decreased as the oligomers were intermediates in this reaction. With regard to glucose, a small amount of glucose (red diamonds) was simultaneously produced with the oligosaccharides from cellulose, but glucose formed after the oligosaccharides accumulated. The yield of glucose reached 72% at 24 h with 97% conversion of cellulose and 74% selectivity, as noted in section 3.1. The yield of glucose started to decrease after 24 h due to the decomposition, as by-products (green triangles) increased. Accordingly, the hydrolysis of cellulose consists of three steps as shown in eqn (1).¹⁶



where k_{1-3} are rate constants. We hypothesised that all steps were first-order reactions as reported elsewhere.^{14,17} The reaction rate for each step was represented as eqn (2)–(5).

Table 2 Effect of the solubility of substrate and catalyst on hydrolysis

Entry	Pre-treatment	Substrate	Catalyst	Conv./%	Yield based on carbon/%C	
					Glc ^a	Olg ^b
12 ^c	Only K26 was milled	Cellobiose	K26	12 ^f	9.0	—
13 ^c	Mix-milling	Cellobiose	K26	14 ^f	11	—
14 ^d	Only cellulose was milled	Cellulose	Benzoic acid	17	3.4	9.8
15 ^d	Mix-milling	Cellulose	Benzoic acid	13	2.7	8.7
16 ^{e,6a}	Individual milling	Cellulose	K26	18	2.9	10
2 ^{e,6a}	Mix-milling	Cellulose	K26	93	20	70

^a Glucose. ^b Water-soluble oligosaccharides (degree of polymerisation = mainly 2–6). ^c Cellobiose (342 mg), K26 (50 mg), distilled water (40 mL), 463 K, <1 min. ^d Cellulose (324 mg), benzoic acid (50 mg), distilled water (40 mL), 453 K, 20 min. ^e Cellulose (324 mg), K26 (50 mg), distilled water (40 mL), 453 K, 20 min. ^f Conversion of cellobiose was calculated from the total amount of recovered and adsorbed cellobiose. For the estimation of adsorbed amount of cellobiose, adsorption equilibrium constants and the adsorption capacity^{11c} were used.



$$\frac{d[\text{Cellulose}]}{dt} = -k_1[\text{Cellulose}] \quad (2)$$

$$\frac{d[\text{Oligomers}]}{dt} = k_1[\text{Cellulose}] - k_2[\text{Oligomers}] \quad (3)$$

$$\frac{d[\text{Glucose}]}{dt} = k_2[\text{Oligomers}] - k_3[\text{Glucose}] \quad (4)$$

$$\frac{d[\text{By-products}]}{dt} = k_3[\text{Glucose}] \quad (5)$$

where [Cellulose], [Oligomers], [Glucose] and [By-products] are concentrations of respective compounds and t is time. The integration of these formulae gives eqn (6)–(9).

$$[\text{Cellulose}] = [\text{Cellulose}]_0 e^{-k_1 t} \quad (6)$$

$$[\text{Oligomers}] = [\text{Cellulose}]_0 \frac{k_1}{k_2 - k_1} (e^{-k_1 t} - e^{-k_2 t}) \quad (7)$$

$$[\text{Glucose}] = [\text{Cellulose}]_0 \frac{k_1 k_2}{k_2 - k_1} \left\{ \frac{1}{k_3 - k_1} (e^{-k_1 t} - e^{-k_3 t}) + \frac{1}{k_3 - k_2} (e^{-k_2 t} - e^{-k_3 t}) \right\} \quad (8)$$

$$[\text{By-products}] = [\text{Cellulose}]_0 - [\text{Cellulose}] - [\text{Oligomers}] - [\text{Glucose}] \quad (9)$$

where $[\text{Cellulose}]_0$ is the initial concentration of cellulose and $k_1 \neq k_2 \neq k_3$.

Four lines in Fig. 2 represent the curve fitting using eqn (6)–(9), which reproduced the experimental data. The determined rate constants were $k_1 = 0.17 \text{ h}^{-1}$, $k_2 = 0.16 \text{ h}^{-1}$ and $k_3 = 0.017 \text{ h}^{-1}$. The rate constant of hydrolysis of cellulose to soluble oligosaccharides was as high as that of oligosaccharides to glucose ($k_1/k_2 = 1.1$). It is surprising that k_1/k_2 exceeds 1 as the rate-determining step of the hydrolysis of cellulose to glucose is generally the first step,¹⁶ indicating that the conversion of solid cellulose to soluble oligomers was selectively accelerated by the mix-milling. In addition, high k_1/k_3 (10) and k_2/k_3 (9.4) ratios provided a good yield of glucose because the decomposition of glucose was limited.

We also performed the hydrolysis of individually-milled cellulose by K26 at 418 K instead of the mix-milled sample. Note that the reactivity itself of individually-milled cellulose should be similar to that of mix-milled cellulose, as their polymerisation degrees determined by viscometry¹⁸ (640–690), median particle diameters (12–13 μm) and crystallinity indexes (<5%) are almost the same.^{6a} Since the hydrolysis reaction was slow in this case, we analysed the products by a sampling

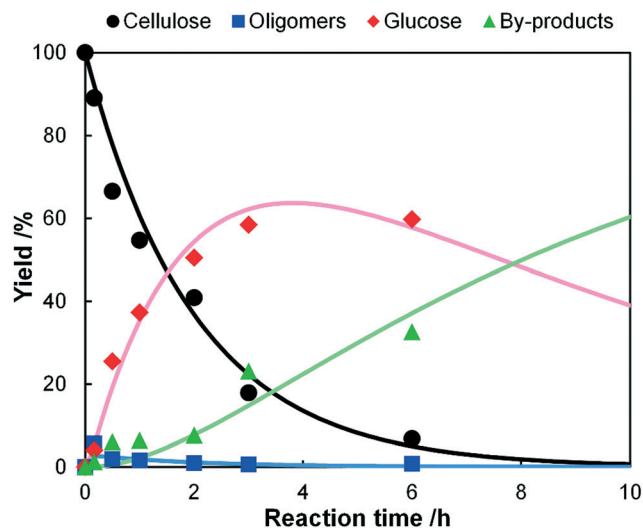


Fig. 3 Time-course of the hydrolysis of ball-milled cellulose by H_2SO_4 (50 mM) at 418 K. The dots show the experimental data and the lines are the results of kinetic simulations based on eqn (6)–(9).

method to improve the accuracy. The formation of oligomers, subsequent production of glucose and successive decomposition of glucose were observed in this reaction. Therefore, the same curve fitting was applied to this reaction, which provided rate constants of $k_1 = 0.013$, $k_2 = 0.16$ and $k_3 = 0.017 \text{ h}^{-1}$. k_1 was greatly decreased by changing the pre-treatment from mix-milling to individual milling, while the values of k_2 and k_3 were similar regardless of the pre-treatment method. As a result, the ratio of k_1/k_2 was as small as 0.081, showing that the hydrolysis of cellulose to soluble oligomers was the rate-determining step. Consequently, we demonstrated that the mix-milling selectively and drastically increases k_1 (13-fold) in the solid–solid reaction.

A typical soluble acid, H_2SO_4 , was also tested as a catalyst for the hydrolysis of individually-milled cellulose in order to compare solid–solid and solid–liquid reactions (Fig. 3). The concentration of H_2SO_4 was 50 mM (0.49%) as a usual value for the diluted H_2SO_4 processes.^{2a,19} The rate constants obtained by a curve fitting were $k_1 = 0.5 \text{ h}^{-1}$, $k_2 = 17 \text{ h}^{-1}$ and $k_3 = 0.12 \text{ h}^{-1}$. The first step is slow ($k_1/k_2 = 0.029$), indicating that the hydrolysis of cellulose to soluble oligosaccharides is the rate-determining step for the production of glucose. This result is reasonable as the hydrolysis of cellulose is significantly more difficult than that of soluble oligomers.¹⁶ Therefore, the high ratio of k_1/k_2 for the hydrolysis using K26 and mix-milling is specific to this reaction, and hence we propose that the solid–solid contact created by mix-milling can selectively accelerate the solid reaction.

4. Conclusions

We evaluated the effect of mix-milling by three types of combinations: (i) insoluble cellulose and insoluble K26, (ii) soluble cellobiose and insoluble K26 and (iii) insoluble cellulose and



soluble benzoic acid. Mix-milling enhanced the hydrolysis of glycosidic bonds only when combination (i) was employed. These results indicated that solid–solid reactions were accelerated by creating better contacts between the solid cellulose and solid catalyst. The rate constant of hydrolysis of the mix-milled cellulose to oligomers increased 13 times higher than that of individually-milled one. This high rate constant contributed to the high-yielding synthesis of glucose from cellulose (72% yield, 97% conversion and 74% selectivity) under mild conditions. We believe that the mix-milling is a promising technique for accelerating the reactions that occur at the solid–solid interface.

Acknowledgements

This work was supported by the Japan Science and Technology Agency (JST) ALCA and by a grant-in-aid for Young Scientists (KAKENHI, 23760734) from the Japan Society for the Promotion of Science (JSPS). The authors would like to thank Mr I. Fujita (Showa Denko K.K.) for supplying the alkali-activated carbon K26.

Notes and references

- (a) M. Yabushita, H. Kobayashi and A. Fukuoka, *Appl. Catal., B*, 2014, **145**, 1–9; (b) P. Gallezot, *Chem. Soc. Rev.*, 2012, **41**, 1538–1558; (c) D. M. Alonso, J. Q. Bond and J. A. Dumesic, *Green Chem.*, 2010, **12**, 1493–1513; (d) R. Rinaldi and F. Schüth, *Energy Environ. Sci.*, 2009, **2**, 610–626.
- (a) H. Kobayashi and A. Fukuoka, *Green Chem.*, 2013, **15**, 1740–1763; (b) A. Corma, S. Iborra and A. Velty, *Chem. Rev.*, 2007, **107**, 2411–2502; (c) J. C. Serrano-Ruiz, R. M. West and J. A. Dumesic, *Annu. Rev. Chem. Biomol. Eng.*, 2010, **1**, 79–100.
- O. Akpınar, R. J. McGorin and M. H. Penner, *J. Agric. Food Chem.*, 2004, **52**, 4144–4148.
- (a) S. Suganuma, K. Nakajima, M. Kitano, D. Yamaguchi, H. Kato, S. Hayashi and M. Hara, *J. Am. Chem. Soc.*, 2008, **130**, 12787–12793; (b) A. Onda, T. Ochi and K. Yanagisawa, *Green Chem.*, 2008, **10**, 1033–1037; (c) R. Rinaldi, N. Meine, J. vom Stein, R. Palkovits and F. Schüth, *ChemSusChem*, 2010, **3**, 266–276; (d) S. Van de Vyver, L. Peng, J. Geboers, H. Schepers, F. de Clippel, C. J. Gommers, B. Goderis, P. A. Jacobs and B. F. Sels, *Green Chem.*, 2010, **12**, 1560–1563; (e) J. Pang, A. Wang, M. Zheng and T. Zhang, *Chem. Commun.*, 2010, **46**, 6935–6937; (f) D.-M. Lai, L. Deng, J. Li, B. Liao, Q.-X. Guo and Y. Fu, *ChemSusChem*, 2011, **4**, 55–58; (g) A. Takagaki, M. Nishimura, S. Nishimura and K. Ebitani, *Chem. Lett.*, 2011, **40**, 1195–1197.
- (a) H. Kobayashi, T. Komanoya, K. Hara and A. Fukuoka, *ChemSusChem*, 2010, **3**, 440–443; (b) T. Komanoya, H. Kobayashi, K. Hara, W.-J. Chun and A. Fukuoka, *Appl. Catal., A*, 2011, **407**, 188–194.
- (a) H. Kobayashi, M. Yabushita, T. Komanoya, K. Hara, I. Fujita and A. Fukuoka, *ACS Catal.*, 2013, **3**, 581–587; (b) J. Pang, A. Wang, M. Zheng, Y. Zhang, Y. Huang, X. Chen and T. Zhang, *Green Chem.*, 2012, **14**, 614–617; (c) P.-W. Chung, A. Charnot, O. A. Olatunji-Ojo, K. A. Durkin and A. Katz, *ACS Catal.*, 2014, **4**, 302–310.
- H. Wang, C. Zhang, H. He and L. Wang, *J. Environ. Sci.*, 2012, **24**, 473–478.
- A. Takagaki, C. Tagusagawa and K. Domen, *Chem. Commun.*, 2008, 5363–5365.
- J. Tian, C. Fan, M. Cheng and X. Wang, *Chem. Eng. Technol.*, 2011, **34**, 482–486.
- C. Loerbroeks, R. Rinaldi and W. Thiel, *Chem. - Eur. J.*, 2013, **19**, 16282–16294.
- (a) M. Kitano, D. Yamaguchi, S. Suganuma, K. Nakajima, H. Kato, S. Hayashi and M. Hara, *Langmuir*, 2009, **25**, 5068–5075; (b) P.-W. Chung, A. Charnot, O. M. Gazit and A. Katz, *Langmuir*, 2012, **28**, 15222–15232; (c) M. Yabushita, H. Kobayashi, J. Hasegawa, K. Hara and A. Fukuoka, *ChemSusChem*, 2014, DOI: 10.1002/cssc.201301296.
- (a) O. M. Gazit, A. Charnot and A. Katz, *Chem. Commun.*, 2011, **47**, 376–378; (b) O. M. Gazit and A. Katz, *Langmuir*, 2012, **28**, 431–437; (c) O. M. Gazit and A. Katz, *J. Am. Chem. Soc.*, 2013, **135**, 4398–4402.
- (a) S. M. Hick, C. Griebel, D. T. Restrepo, J. H. Truitt, E. J. Buker, C. Bylda and R. G. Blair, *Green Chem.*, 2010, **12**, 468–474; (b) N. Meine, R. Rinaldi and F. Schüth, *ChemSusChem*, 2012, **5**, 1449–1454; (c) A. Shrotri, L. K. Lambert, A. Tanksale and J. Beltramini, *Green Chem.*, 2013, **15**, 2761–2768.
- H. Kobayashi, Y. Ito, T. Komanoya, Y. Hosaka, P. L. Dhepe, K. Kasai, K. Hara and A. Fukuoka, *Green Chem.*, 2011, **13**, 326–333.
- C. Moreno-Castilla, F. Carrasco-Marín, C. Parejo-Pérez and M. V. L. Ramón, *Carbon*, 2001, **39**, 869–875.
- (a) C. E. Wyman, S. R. Decker, M. E. Himmel, J. W. Brady, C. E. Skopek and L. Viikari, in *Polysaccharides: Structural Diversity and Functional Versatility*, ed. S. Dumitriu, CRC Press, Boca Raton, 2nd edn, 2004, ch. 43, pp. 995–1034; (b) N. Abatzoglou, J. Bouchard, E. Chornet and R. P. Overend, *Can. J. Chem. Eng.*, 1986, **64**, 781–786.
- (a) J. F. Saeman, *Ind. Eng. Chem.*, 1945, **37**, 43–52; (b) M. Sasaki, B. Kabyemela, R. Malaluan, S. Hirose, N. Takeda, T. Adschiri and K. Arai, *J. Supercrit. Fluids*, 1998, **13**, 261–268.
- C. L. McCormick, P. A. Callais and B. H. Hutchinson Jr., *Macromolecules*, 1985, **18**, 2394–2401.
- (a) W. L. Faith, *Ind. Eng. Chem.*, 1945, **37**, 9–11; (b) R. Rinaldi and F. Schüth, *ChemSusChem*, 2009, **2**, 1096–1107.

