



Cite this: *RSC Adv.*, 2017, 7, 40990

## Enhancement of bacterial growth with the help of immiscible oxygenated oils

Karolina Sklodowska and Slawomir Jakiela \*

Bacterial growth in an aqueous medium in the vicinity of the interface with an immiscible oxygenated fluid is a subject of this study. We analyse the impact of fluids with oxygen solubility much higher than that of water, on the growth rate of *Escherichia coli* in shaken simple culture tubes. The measurements were conducted continuously in an incubator with the use of a custom-designed detector of scattered light. As a result, we show that oxygenated immiscible fluids transfer oxygen across the interfaces to enhance the maximum growth rate of bacteria, in some cases even to double it. In the present study, we probed six fluids, including hexadecane, silicone oil, fluorinated liquids: FC-40, FC-70, and hydrofluoroethers (HFE): HFE-7200 and HFE-7500. The mechanisms of interfacial phenomena of physio-chemical and hydrodynamic nature have been elucidated.

Received 26th June 2017  
 Accepted 14th August 2017

DOI: 10.1039/c7ra07095k

[rsc.li/rsc-advances](http://rsc.li/rsc-advances)

### Introduction

The rapid growth of bacteria is now essential in many branches of industry, medicine and pharmacology. The food industry uses bacteria in production and preservation,<sup>1</sup> and especially in the proliferation of probiotic bacteria.<sup>2</sup> Medicine searches for a rapid means of pathogen detection and fitting an appropriate antibiotic at a proper concentration to provide to a patient.<sup>3,4</sup> Currently, the latter is even more significant than identification of the particular microorganisms. Pharmacology produces specific proteins and antibodies utilizing genetically modified bacteria.<sup>5,6</sup>

Oxygen supply to bacterial growth is a well-known and investigated topic during the last, at least, 50 years.<sup>7–11</sup> Special incubators providing enhanced oxygenation of a culture medium are employed to improve the growth of bacteria and the biomass. Oxygen is the main substrate whose transport is crucial in the aerobic culture.<sup>12,13</sup> For this purpose, one applies liquid/liquid<sup>10,14,15</sup> or gas/liquid<sup>10,16,17</sup> bioreactors to increase the oxygen transfer capabilities. Recently, the use of organic solvents,<sup>18</sup> membranes,<sup>19,20</sup> surfactants<sup>21</sup> or particles<sup>22</sup> to improve oxygen transfer between phases in the complex systems have also been reported. The most popular groups of compounds used in these applications are hydrocarbon oils, fluorinated fluids, and hydrofluoroethers. These fluids characterise themselves with high oxygen solubility and biocompatibility.<sup>23,24</sup>

On the other hand, we have to remember that the rapid stochastic growth of bacteria is limited by general relationship concerning heat, self-organization and durability of bacteria.<sup>25</sup> It means that thermodynamics of a bacterial division process

imposes certain constraints on self-replication. From this point of view, the limitation of the doubling time of *Escherichia coli* to ca. 20 minutes in ideal conditions is justified. Other strains, such as thermophilic anaerobic bacteria, show the doubling time of ca. 10 minutes.<sup>26</sup> Similarly, *Vibrio natriegens* has dividing twice as fast as *Escherichia coli*.<sup>27</sup> So, the doubling time and the amount of biomass of bacteria depend on the strain of bacteria as well as on the environment and conditions under which microorganisms are growing.

### A need for another approach

The primary objective of this research has been to find the best oil as a continuous phase to apply in microfluidics.<sup>28–30</sup> In these applications, the continuous phase can be supplied to a microfluidic chip from a container which is under pressure of, e.g., pure oxygen.<sup>31</sup> In addition, the growth of bacterial culture in microfluidic droplets is fast.<sup>32</sup> Reported growth rates are among the most optimal for a given strain.<sup>31,33</sup> These phenomena have not yet been thoroughly investigated. Therefore, the approach presented herein does not optimise the mixing, sparkling or bubbling gas or oil, nor considering the destructive action of free radicals, which is increased as a result of excess oxygen.<sup>34</sup> We focus on the simplest gas exchange at the free interface between the bacteria medium and the tested oil to find the best continuous phase for applications in microfluidics.

### Results

#### The growth of bacteria in oxygenated immiscible fluids

For investigations, we chose fluids that are biocompatible and exhibit high oxygen solubility. These are: hexadecane, silicone oil, FC-40, FC-70, HFE-7200 and HFE-7500. Prior to the experiment, each of the fluids is aerated twelve hours with the use of

Warsaw University of Life Sciences, Department of Biophysics, Nowoursynowska 159, Warsaw, 02-776, Poland. E-mail: [slawomir\\_jakiela@sggw.pl](mailto:slawomir_jakiela@sggw.pl); Fax: +48 22 593 8626; Tel: +48 22 593 8619



pure oxygen. Next, we pour 20 mL of inoculated *Escherichia coli* culture medium and 20 mL of one of the tested liquids to the culture tubes. Hexadecane and silicone oil are less dense than water; as a result, the culture media are afloat (Fig. 1b). In turn, FC-40, FC-70, HFE-7200 and HFE-7500 have density almost double the density of water, so the culture media float on them (Fig. 1c). A control tube used as the reference contained only 20 mL of inoculated culture medium. In each of the ten repetitions of the experiment, seven vessels were placed on an orbital shaker (200 rpm) in a thermostatic incubator (37 °C). The light scattered by bacteria in the culture media was measured using the custom-made system every 10 minutes within 12 hours.

Fig. 1 shows the bacterial growth curves for each fluid. The results indicate that the presence of each of the oxygenated immiscible fluids initiates a faster growth of bacteria in the nutrient as compared to the reference sample. The bacteria populations attained a stationary phase at different levels, as evidenced by the steady-state light scattering intensity. Moreover, the maximum rates of bacterial growth (see Table 1) are higher for samples containing fluids under test than that for the control sample.

### Correlation of the number of colony-forming units with the light scattering of the bacterial medium

To check, that the value of scattering measured in the tubes is proportional to the number of bacteria, we have performed the bacterial culture test using the dilution method for the

selected cultures (Fig. 2). The outcomes confirmed that despite the vicinity of various oxygenated fluids, the number of bacteria in the culture continued to grow as indicated by the McFarland units. The result also indicates no changes in bacterial morphology between the various samples – that has been confirmed with the use of a microscope. Larger or smaller bacterial cells may cause a decrease or increase in measured scattering,<sup>35</sup> but then the number of colonies for the measured OD should deviate significantly from the straight line.<sup>36</sup>

### The growth of bacteria between two free interfaces

The next experiment was performed using four culture tubes which contained: (a) 15 mL of medium (serving as the control/reference sample), (b) 15 mL of medium and 15 mL of hexadecane, (c) 15 mL of medium and 15 mL of HFE-7500, (d) 15 mL of medium plus 15 mL of hexadecane and 15 mL of HFE-7500. From the group of fluorinated and HFE fluids, we have selected HFE-7500. Then, from the group of afloat fluids, we have selected hexadecane. These selections were made due to the highest bacterial growth rates observed during the initial experiments (see Table 1). The last sample consisted of three phases: looking from the bottom, the first was a heavy phase of HFE-7500, then, in the middle, was the bacteria medium, and finally, on top, there was a light phase of hexadecane (Fig. 1d). HFE-7500 and hexadecane do not mix with each other. They form two free interfaces: the medium/hexadecane one and the

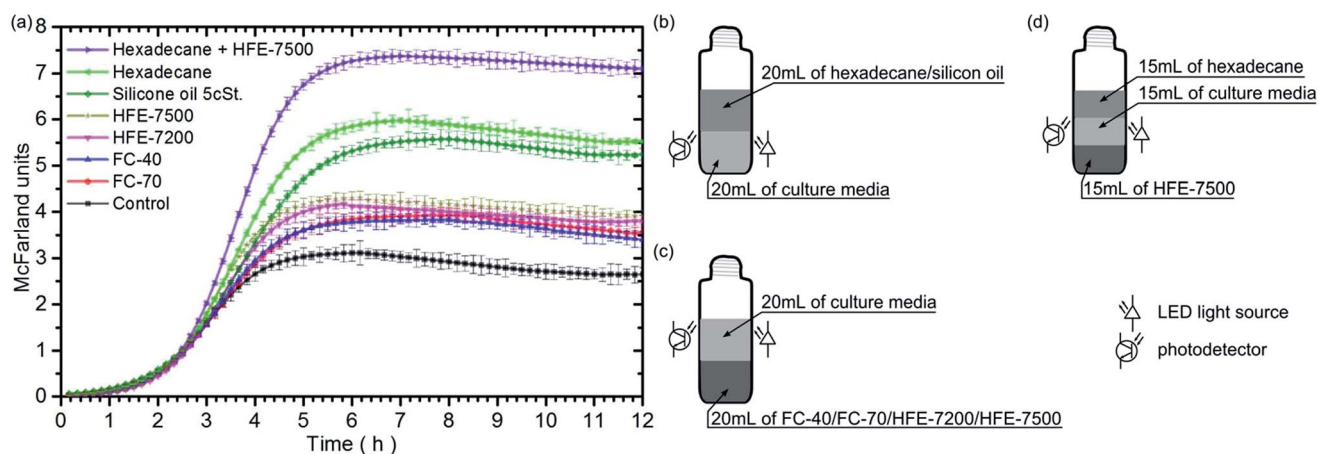


Fig. 1 (a) Graph shows the temporal evolution of scattered light intensity observed during bacterial growth (expressed in McFarland units) in culture media tubes containing different oxygenated oils. The marked standard deviations were calculated for ten independent experiments. (b–d) Schematic illustration of the cultivation of *E. coli* bacteria in medium: (b) in the vicinity of hexadecane or silicon oil, (c) in the vicinity of fluorinated/hydrofluoroether, (d) between two immiscible fluids. The LED light source and the photodetector were placed in the middle of bacteria medium.

Table 1 The maximum rate of bacteria growth in experiments performed with different oxygenated immiscible fluids in comparison to the control sample. The standard deviations were calculated from measurements in ten independent experiments. Abbreviation Hex stands for hexadecane

	Control	FC-70	FC-40	HFE-7200	HFE-7500	Silicon oil 5 cSt.	Hexadecane	Hex + HFE-7500
Max. growth rate [h <sup>-1</sup> ]	1.32 ± 0.03	1.37 ± 0.02	1.49 ± 0.02	1.76 ± 0.02	1.90 ± 0.02	1.76 ± 0.02	2.20 ± 0.02	3.07 ± 0.01



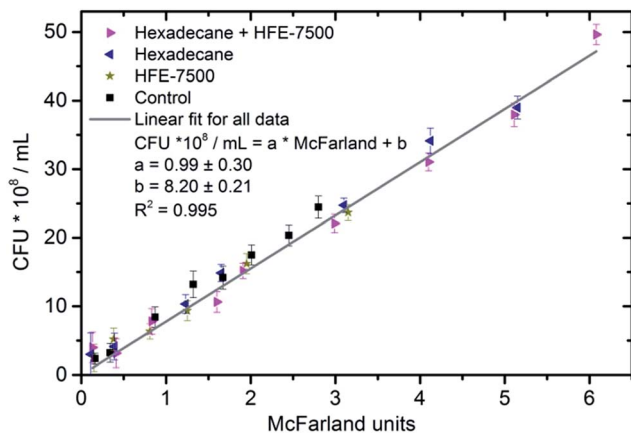


Fig. 2 The correlation between the number of colony-forming units (CFU) per mL and McFarland units for various samples. Colonies were plate-counted after dilutions of bacterial culture media.

medium/HFE-7500 one. As before, the hexadecane and HFE-7500 oils were oxygenated for 12 hours before the experiment. The experiment was also repeated 10 times. The signals measured for the first three samples are comparable with those obtained in previous experiments within the limits of statistical errors. Therefore, the result obtained for the remaining three-phase sample is shown in the Fig. 1 and the Table 1 for better comparison.

The obtained results show that the growth of bacteria in medium placed between two oil phases is the fastest, with the

maximum growth rate attaining  $3.08 \text{ h}^{-1}$  which is more than twice the rate in the control sample. Moreover, we observe the greatest increase in biomass volume under these conditions.

### Dependence of the bacterial growth on the volume of oxygenated fluids

Next, we checked how the growth of bacteria depends on the amount of the employed immiscible fluid. In this case, we used independently hexadecane and HFE-7500. The volume of media in each culture sample was the same – 20 mL. The tests were performed for four volumes of oxygenated immiscible liquids: 5 mL, 10 mL, 15 mL and 20 mL. Fig. 3 represents the finding of the study.

The performed experiments show that 5 mL of the immiscible oxygenated fluid can increase the growth rate of bacteria *ca.* 21% and 2% while 20 mL of oil can increase the growth rate *ca.* 67% and 44%, for hexadecane and HFE-7500, respectively. For both liquids, the larger volume of an oxygenated fluid on the bottom or on the top of the culture media, caused an increase of the bacteria population in the stationary phase. Moreover, the growth rate increases with increasing volume of the tested fluids (Table 2).

## Discussion

The obtained results show that the presence of an oxygenated immiscible fluid in the vicinity of the culture medium causes a faster bacterial growth and leads to a much larger population

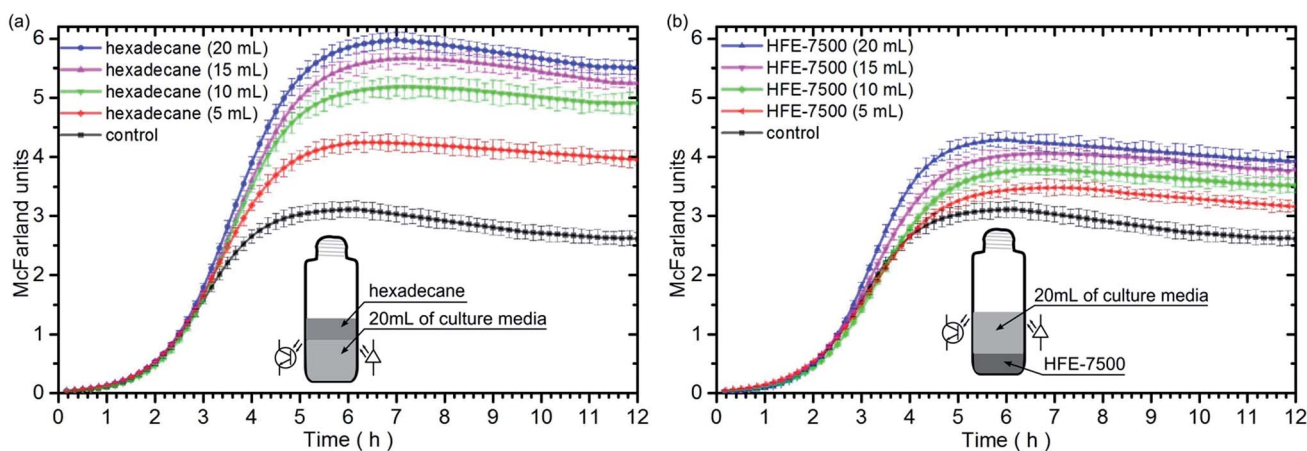


Fig. 3 Temporal evolution of light scattering intensity, expressed in McFarland units, during the bacteria growth in culture media tubes for different volumes of: (a) hexadecane, (b) HFE-7500. The marked standard deviations were calculated from ten independent experiments. The sketches depict the distribution of liquids in culture tubes. The positions of the LED light source and the photodetector were marked in the middle of the bacteria medium.

Table 2 The maximum bacterial growth rates for different volumes of oxygenated HFE-7500 and hexadecane fluids. The standard deviations were calculated from ten independent experiments. Abbreviations: Hex – hexadecane, HFE – HFE-7500

	Control	Hex 20 mL	Hex 15 mL	Hex 10 mL	Hex 5 mL	HFE 20 mL	HFE 15 mL	HFE 10 mL	HFE 5 mL
Max. growth rate [ $\text{h}^{-1}$ ]	$1.32 \pm 0.03$	$2.20 \pm 0.02$	$2.11 \pm 0.03$	$1.96 \pm 0.02$	$1.60 \pm 0.03$	$1.90 \pm 0.02$	$1.78 \pm 0.02$	$1.44 \pm 0.03$	$1.35 \pm 0.03$



Table 3 Physical properties of fluids used in this study. Where there are no references, the data were taken from <http://www.guidechem.com>

Fluid	Density (kg m <sup>-3</sup> ) at 25 °C	Oxygen solubility (mL of gas/1 L of fluid) at 1 bar of air	Vapour pressure (Torr) at 25 °C	Diffusion coefficient of oxygen 10 <sup>-9</sup> (m <sup>2</sup> s <sup>-1</sup> )
Water	1000	4.775 (36 °C) <sup>37</sup>	23.7	2.11 (22 °C) <sup>38</sup>
Hexadecane	773	49.5 (22 °C) <sup>38</sup>	<0.1	2.49 (22 °C) <sup>38</sup>
Silicon oil 5 cSt.	913	51.9 (38 °C) <sup>39</sup>	5	No data
FC-40	1870	76.8 (25 °C) <sup>40</sup>	3	8.3 (22 °C) <sup>15</sup>
FC-70	1940	64.4 (22 °C)	<0.1	3.17 (22 °C)
HFE-7200	1416	128.4 (25 °C) <sup>41</sup>	102 <sup>42</sup>	>5 (25 °C) <sup>43</sup>
HFE-7500	1559	>100 <sup>44</sup>	14	>5 (22 °C) <sup>43</sup>

of bacteria in the stationary phase. These outcomes can be interpreted with the use of the Fick's and Henry's laws, which say that the transfer of gas, in this case – oxygen, is proportional to the difference in oxygen partial pressures between liquids, and to the exchange rate at the interface. From the point of view of statistical physics, the gas exchange should take place until the balance of chemical potentials of two liquids is attained. Table 3 contains a set of physical data for the tested fluids. One can notice that the highest oxygen solubility is encountered for HFE liquids. In turn, other fluids such as fluorinated oils, hexadecane and silicone oil are comparable to each other.

However, in the first experiment, the highest bacteria growth rate was observed for hexadecane and HFE-7500. As a result of the depletion of oxygen in the medium, a difference in the partial pressure of dissolved oxygen between the immiscible liquid and the medium develops that is larger than the initial difference characterising the oxygen-saturated medium. Therefore, oxygen begins to flow from the immiscible oxygenated fluid to the medium. In addition, hexadecane and silicone oil are afloat so they can absorb atmospheric oxygen. The culture tubes are all the time in an orbital shaker, so we cannot base our model on the diffusion process alone due to the large contribution of convective mass transport.

In the case of fluorinated and HFE fluids, they do not have free access to the air due to their density. Similarly, when bacteria begin consuming oxygen, the medium can transport it from high-density fluids – due to the difference in the partial pressure. Now, the medium can also absorb oxygen from the air. We notice that the vicinity of fluorinated oils, which have a lower oxygen solubility than HFE fluids, can cause a lower growth of bacteria. Nevertheless, the measured difference in growth rate of bacteria is not solely dependent on the oxygen solubility in liquids. The key factor is the oxygen exchange rate at the interface,<sup>45</sup> but the quantitative description of the oxygen transfer parameters are not well-known yet.<sup>10,46</sup>

The above description is also consistent with the second experiment with two free interfaces: culture medium/hexadecane and culture medium/HFE-7500. In that case, we notice the highest maximum growth rate of bacteria among all measurements. The depletion of oxygen in the culture medium is quickly replenished through the oxygen transport from hexadecane and HFE-7500, and bacteria do not feel drastic decline of oxygen level.

The last experiment shows the impact of the quantity of immiscible fluid on the growth of bacteria. When we pour more fluid, it is equivalent with supplying more oxygen. In other words, the equilibrium of partial pressure of oxygen distribution between culture medium and the supplying fluid will be reached later. For this reason, bacteria had larger growth rate, when we poured more oxygenated fluid.

The results indicate clearly that the use of oxygenated oils enables a rapid growth of a bacterial culture which leads to the high concentration of cells. The high-density cultures are recommended for a recombinant protein production, especially for those with low expression rate.<sup>47</sup> The high concentration of fast-growing bacterial culture reduces the time of interactions of microorganisms with toxic proteins produced. Hence, it contributes to gain a higher protein expression.<sup>47</sup> The presence of oil does not alter the behavioural or genomic characteristics of the bacteria due to the oil–water immiscibility. The bacteria grow exclusively in the aqueous phase while the oil phase serves only as a means of high-content oxygen supply and fast interfacial oxygen transfer medium. Therefore, the cultivation of bacteria in bioreactors using oxygenated oils as an oxygen source for bacterial colonies offers a promising alternative to the current technologies used in the industry.

## Conclusions

In summary, the much faster growth of bacteria can be obtained with the use of the oxygenated organic oils, fluorinated or HFE fluids. It is important to select the proper immiscible fluid that has a lot of dissolved oxygen. In the microfluidic systems, we can ensure the continuous transport of oxygen from the continuous phase to the bacteria medium located in the microdroplet. By extension, to attention deserve HFE oils and hexadecane. It is further noted that the droplet flowing in a microfluidic channel exhibits intensive mixing as a result of eddy pairs inside the volume.<sup>48</sup> Thereby, droplet should have the same concentration of oxygen in the entire volume, as well as at the interface.

Further studies, we are currently conducting with the microfluidic bioreactors, involve synthesis of recombinant proteins using oxygenated oils as the medium supplying oxygen to the growing bacterial culture.



## Experimental

### Automation and setup

Custom written Lab View (National Instruments, USA) script controlled custom-designed culture tubes and measured the growth of the bacteria in different environments at the same time *via* National Instruments (USA) card (NI PCIE-6321). Bacteria were grown in 60 mL glass tubes (Rotilabo screw neck ND24 vials (LC94.1), Roth, Germany), similar like in the Toprak's experiment.<sup>49</sup> Each tube was placed in a holder containing a LED light source (XPEBAM-L1-0000-00901, <http://mouser.com>) and a photodiode (TSL257-LF, <http://uk.farnell.com>). The angle between the optical axis of the LED and photodiode was 135°. The holder was set exactly in the middle of the medium fluid with bacteria to monitor the scatter of the light.

The system enables to measure the voltage from photodiodes every 10 minutes. The culture tubes together with holders were placed in the shaking incubator (200 rpm, 37 °C, Grant Bio ES20, Keison International Ltd, UK). Before each measurement, the shaker was turned off for 20 seconds. After the measurement, the shaker was turned back on.

### Measurement of light scattering – calibration process

The light scattering was measured using a custom-built sensor applying various McFarland equivalence turbidity standards (R20410, R20411, R20412, R20413, R20414, R20415) purchased from Thermo Fisher Scientific Inc. (USA). As a result, the voltage output of a photodiode could be calibrated and scaled in the McFarland units. To achieve maximum compliance, we have also measured the scattering of the culture medium at different stages of colony growth, both in the bacterial nephelometer (Cn60m/Wgz-2xj, China Medical Devices, China) and with our sensor. As a result, we calculated the Pearson correlation coefficient, which equals 0.983.

### Media and reagents

A Luria-Bertani Broth (LB Broth, Biocorp, Poland) was used in all experiments. As a model organism, we used *E. coli* strain ATCC 25922. The prepared stock solution of cells in LB broth containing 30% glycerol (Sigma-Aldrich, Poland) was stored at –80 °C. Before experiments, cells were streaked on LB agar plates and incubated overnight. We picked individual colonies, used them to inoculate liquid LB broth, cultured the cells at 37 °C with shaking at 200 rpm overnight, and transferred aliquots to the fresh LB media and grew them until the absorbance at 600 nm reached 0.1. The culture was diluted tenfold in fresh medium before transferring suspensions of *E. coli* into culture tubes. The transfer was performed from the same overnight culture into tubes at the same time. The experiment was repeated ten times for the whole set of fluids.

Oils used in experiments: hexadecane (*n*-hexadecane, 99%), silicone oil (silicone oil viscosity 5 cSt. (25 °C)), were purchased from Sigma-Aldrich (Poland). In turn, the fluorinert fluids: FC-40 and FC-70, as well as the hydrofluoroether fluids: HFE-7200, HFE-7500, were bought from 3M (USA).

**Oxidation process.** Before each experiment, the fluids were oxygenated (pure oxygen) for 12 hours at standard air pressure and temperature 25 °C. Oxygen was administered from an air stone (Pawfly Air Stone Bubble for Aquarium, <http://amazon.com>). The flow rate was 2 L min<sup>-1</sup>. Unless otherwise noted, the experiments were repeated ten times to verify repeatability and statistics.

To avoid any fire hazard while dissolving pure oxygen in oils, the oxygen should be first saturated with water vapours. The use of high-flammability oils, mixed oxygen with small addition (~1% v/v) of nitrogen is recommended.

**Dilution method.** The counting of CFUs was repeated three times for each point with the use of LB Agar plates (Biocorp, Poland) after 18 hour incubations at 37 °C.

## Conflicts of interest

There are no conflicts to declare.

## Acknowledgements

This project was supported by the Polish National Science Centre under the grant Opus 8 no. 2014/15/B/ST4/04955.

## Notes and references

- 1 E. Caplice and G. F. Fitzgerald, *Int. J. Food Microbiol.*, 1999, **50**, 131–149.
- 2 A. Y. Tamime, *Probiotic Dairy Products*, John Wiley & Sons, 2008.
- 3 S. Leekha, C. L. Terrell and R. S. Edson, *Mayo Clin. Proc.*, 2011, **86**, 156–167.
- 4 S. Kalsi, M. Valiadi, M.-N. Tsaloglou, L. Parry-Jones, A. Jacobs, R. Watson, C. Turner, R. Amos, B. Hadwen, J. Buse, C. Brown, M. Sutton and H. Morgan, *Lab Chip*, 2015, **15**, 3065–3075.
- 5 Y. J. Lee and K. J. Jeong, *J. Biosci. Bioeng.*, 2015, **120**, 483–490.
- 6 S. Xie, S. Tai, H. Song, X. Luo, H. Zhang and X. Li, *J. Mater. Chem. B*, 2016, **4**, 6820–6829.
- 7 R. Muñoz, A. J. Daugulis, M. Hernández and G. Quijano, *Biotechnol. Adv.*, 2012, **30**, 1707–1720.
- 8 F. Garcia-Ochoa and E. Gomez, *Biotechnol. Adv.*, 2009, **27**, 153–176.
- 9 S. Suresh, V. Srivastava and I. Mishra, *J. Chem. Technol. Biotechnol.*, 2009, **84**, 1091–1103.
- 10 E. Dumont and H. Delmas, *Chem. Eng. Process. Process Intensif.*, 2003, **42**, 419–438.
- 11 Y. Chisti, in *Kirk-Othmer Encyclopedia of Chemical Technology*, John Wiley & Sons, 2000.
- 12 K. C. Lowe, M. R. Davey and J. B. Power, *Trends Biotechnol.*, 1998, **16**, 272–277.
- 13 A. Baez and J. Shiloach, *Microb. Cell Fact.*, 2014, **13**, 181.
- 14 D. Damiano and S. S. Wang, *Biotechnol. Lett.*, 1985, **7**, 81–86.
- 15 L.-K. Ju, J. F. Lee and W. B. Armiger, *Biotechnol. Bioeng.*, 1991, **37**, 505–511.
- 16 H. M. Van Sonsbeek, H. H. Beeftink and J. Tramper, *Enzyme Microb. Technol.*, 1993, **15**, 722–729.



- 17 J. V. Littlejohns and A. J. Daugulis, *Chem. Eng. J.*, 2007, **129**, 67–74.
- 18 E. Dumont, Y. Andrès and P. Le Cloirec, *Biochem. Eng. J.*, 2006, **30**, 245–252.
- 19 I. Ciani, D. P. Burt, S. Daniele and P. R. Unwin, *J. Phys. Chem. B*, 2004, **108**, 3801–3809.
- 20 S. Cannan, J. Zhang, F. Grunfeld and P. R. Unwin, *Langmuir*, 2004, **20**, 701–707.
- 21 M. K. Moraveji, M. M. Pasand, R. Davarnejad and Y. Chisti, *Can. J. Chem. Eng.*, 2012, **90**, 93–99.
- 22 K. C. Ruthiya, J. van der Schaaf, B. F. M. Kuster and J. C. Schouten, *Ind. Eng. Chem. Res.*, 2005, **44**, 6123–6140.
- 23 F. Malchiodi-Albedi, A. Morgillo, G. Formisano, S. Paradisi, R. Perilli, G. C. Scalzo, G. Scorcio and S. Caiazza, *J. Biomed. Mater. Res.*, 2002, **60**, 548–555.
- 24 C. Holtze, A. C. Rowat, J. J. Agresti, J. B. Hutchison, F. E. Angilè, C. H. J. Schmitz, S. Köster, H. Duan, K. J. Humphry, R. A. Scanga, J. S. Johnson, D. Pisignano and D. A. Weitz, *Lab Chip*, 2008, **8**, 1632.
- 25 J. L. England, *J. Chem. Phys.*, 2013, **139**, 121923.
- 26 L. Elsgaard and D. Prieur, *J. Great Lakes Res.*, 2011, **37**, 203–206.
- 27 M. T. Weinstock, E. D. Heseck, C. M. Wilson and D. G. Gibson, *Nat. Methods*, 2016, **13**, 849–851.
- 28 N. Blow, *Nat. Methods*, 2009, **6**, 683–686.
- 29 E. K. Sackmann, A. L. Fulton and D. J. Beebe, *Nature*, 2014, **507**, 181–189.
- 30 A. Gupta, H. B. Eral, T. A. Hatton and P. S. Doyle, *Soft Matter*, 2016, **12**, 2826–2841.
- 31 S. Jakiela, T. S. Kaminski, O. Cybulski, D. B. Weibel and P. Garstecki, *Angew. Chem., Int. Ed.*, 2013, **52**, 8908–8911.
- 32 L. Mahler, M. Tovar, T. Weber, S. Brandes, M. Michael Rudolph, J. Ehgartner, T. Mayr, M. Thilo Figge, M. Roth and E. Zang, *RSC Adv.*, 2015, **5**, 101871–101878.
- 33 M. Horka, S. Sun, A. Ruszczak, P. Garstecki and T. Mayr, *Anal. Chem.*, 2016, **88**, 12006–12012.
- 34 E. Cabisco, J. Tamarit and J. Ros, *Int. Microbiol. Off. J. Span. Soc. Microbiol.*, 2000, **3**, 3–8.
- 35 A. Katz, A. Alimova, M. Xu, E. Rudolph, M. K. Shah, H. E. Savage, R. B. Rosen, S. A. McCormick and R. R. Alfano, *IEEE J. Sel. Top. Quantum Electron.*, 2003, **9**, 277–287.
- 36 K. Stevenson, A. F. McVey, I. B. N. Clark, P. S. Swain and T. Pilizota, *Sci. Rep.*, 2016, **6**, 38828.
- 37 R. F. Weiss, in *Deep Sea Research and Oceanographic Abstracts*, Elsevier, 1970, vol. 17, pp. 721–735.
- 38 L.-K. Ju and C. S. Ho, *Biotechnol. Bioeng.*, 1989, **34**, 1221–1224.
- 39 R. Rodnight, *Biochem. J.*, 1954, **57**, 661.
- 40 B. H. Junker, T. A. Hatton and D. I. Wang, *Biotechnol. Bioeng.*, 1990, **35**, 578–585.
- 41 M. G. Costello, R. M. Flynn and J. G. Owens, in *Kirk-Othmer Encyclopedia of Chemical Technology*, John Wiley & Sons, 2004.
- 42 J. Murata, S. Yamashita, M. Akiyama, S. Katayama, T. Hiaki and A. Sekiya, *J. Chem. Eng. Data*, 2002, **47**, 911–915.
- 43 J. D. McMillan and D. I. Wang, *Ann. N. Y. Acad. Sci.*, 1990, **589**, 283–300.
- 44 R. Battino, T. R. Rettich and T. Tominaga, *J. Phys. Chem. Ref. Data*, 1983, **12**, 163–178.
- 45 A. Chavan and Madhusudan, *APCBEE Procedia*, 2014, **9**, 54–58.
- 46 G. Quijano, M. Hernandez, S. Villaverde, F. Thalasso and R. Muñoz, *Appl. Microbiol. Biotechnol.*, 2010, **85**, 543–551.
- 47 G. L. Rosano and E. A. Ceccarelli, *Front. Microbiol.*, 2014, **5**, 172.
- 48 P. M. Korczyk, M. E. Dolega, S. Jakiela, P. Jankowski, S. Makulska and P. Garstecki, *J. Flow Chem.*, 2015, **5**, 110–118.
- 49 E. Toprak, A. Veres, J.-B. Michel, R. Chait, D. L. Hartl and R. Kishony, *Nat. Genet.*, 2011, **44**, 101–105.

