



Cite this: *RSC Adv.*, 2017, 7, 49975

# The economic and CO<sub>2</sub> reduction benefits of a coal-to-olefins plant using a CO<sub>2</sub>-ECBM process and fuel substitution

Han Yu,<sup>a</sup> Qingzhe Jiang,<sup>\*a</sup> Zhaozheng Song,<sup>a</sup> Qian Ma,<sup>a</sup> Bo Yuan<sup>b</sup> and Huanxi Xiong<sup>b</sup>

Taking advantage of coalbed methane as a substitute for coal fuel can facilitate CO<sub>2</sub> reduction in addition to CO<sub>2</sub> sequestration. Here, the CO<sub>2</sub> reduction potential and economic impact of CO<sub>2</sub> recovery of methane from a coalbed were evaluated at a CTO plant in the Inner Mongolia Autonomous Region of China. Emission reductions and capital, annual, and methane costs were analyzed basing on engineering data, empirical formulas, and assumptions. Cost analysis included the influence of a potential carbon tax. In addition, a sensitivity analysis was conducted on the annual gross profit to parameters, including carbon tax, CO<sub>2</sub> capture rate (CCR), pipeline distance, capital recovery factor, CO<sub>2</sub> injection rate, operation and maintenance (O&M) percentage, coal depth, and methane price. Results showed that an optimal CO<sub>2</sub> capture rate is about 80%, taking into consideration total capital, annual, and methane costs. At this optimum CCR, the methane price was calculated as \$0.12 Nm<sup>-3</sup> and a total capital cost of \$323.14 M, which also results in a 58% reduction in CO<sub>2</sub> emissions. Reductions from CO<sub>2</sub> sequestration and fuel substitution respectively account for 66% and 34% of the total emissions reductions. The carbon tax impact analysis suggests a carbon tax greater than \$20 per tCO<sub>2</sub> will maintain a profitable system with a range in CCR of 70–80%. The sensitivity analysis demonstrates that carbon tax, CCR, and pipeline distance have the greatest effects on annual gross profit.

Received 20th July 2017  
 Accepted 20th October 2017

DOI: 10.1039/c7ra07994j

[rsc.li/rsc-advances](http://rsc.li/rsc-advances)

## 1. Introduction

Olefin plays an important role in the petrochemical industry; therefore, its production capacity may in part reflect a nation's economic status. The world ethylene production capacity reached 153.5 Mt/a with a documented production of roughly 130.0 Mt/a in 2014.<sup>1</sup> In China, the domestic supply of ethylene was 17.3 Mt/a in 2015; nevertheless, the demand was over 37.3 Mt/a with a big gap of 20 Mt/a;<sup>2</sup> it is imperative that this gap be filled with olefins derived from alternative resources. The characteristics of China's energy structure are referred to as "rich in coal, low in oil, and poor in gas" (see Fig. 1), which makes coal to olefins (CTO) production the most clear choice for solving the olefin shortage problem.

The CTO process has clear advantages in product cost based on the low price of feedstock.<sup>4</sup> However, CTO technology suffers from high CO<sub>2</sub> emissions, which urgently needs to be addressed in the context of the international political environment. CO<sub>2</sub> mitigation methods have primarily focused on fuel balance and

switching, technology upgrades, and CO<sub>2</sub> capture for sequestration or utilization.<sup>5–10</sup> Among these, CO<sub>2</sub> sequestration has been verified as an effective approach because it can reduce CO<sub>2</sub> at a larger scale than other options. Carbon capture and storage (CCS), CO<sub>2</sub> enhanced coalbed methane (CO<sub>2</sub>-ECBM), and CO<sub>2</sub> enhanced oil recovery (CO<sub>2</sub>-EOR) are three major technologies which have received increasingly attention in recent years.

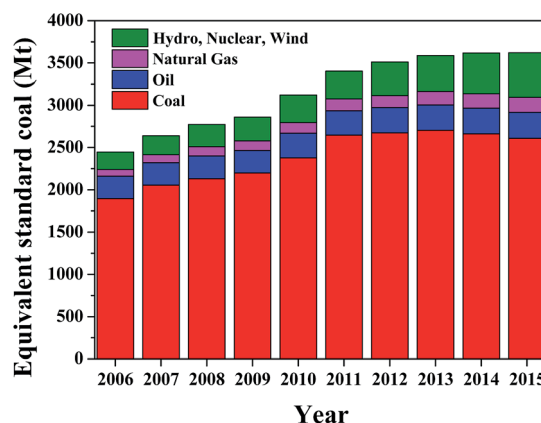


Fig. 1 Profile of major energy production in China since 2006.<sup>3</sup>

<sup>a</sup>State Key Laboratory of Heavy Oil Processing and Beijing, China University of Petroleum, Beijing 102249, P. R. China. E-mail: [jiangqingzhe@163.com](mailto:jiangqingzhe@163.com); Tel: +86 10 89733372

<sup>b</sup>Research Institute of Safety & Environment Technology, China National Petroleum Corporation, Beijing 102206, China



Table 1 Screening criteria for CO<sub>2</sub>-EOR

Criteria	Miscible	Immiscible
Capacity	>4 Mt	
Reservoir type	Sandstones and carbonates	
Rock wettability	Water wet of week oil wet	
Depth	>450 m	600–900
Thickness	<40 m	10–20 m
Temperature	60–121 °C	>35
Pressure	> minimum miscibility and < fracture pressures	>7.5 MPa
Porosity	>3%	>3%
Permeability	>5 mD	>0.1 mD
Caprock thickness	>10 m	>10m
Oil density	<0.88	>0.9
Oil viscosity	<10 mPa s	10–1000
Oil saturation	>0.3	0.3–0.7

Table 2 Screening criteria for CO<sub>2</sub>-ECBM

Criteria	Suitable condition
Capacity	>1 Mt
Thickness	>10 m
Depth	300–1500 m
Temperature	>35 °C
Pressure	>7.5 MPa
Porosity	>5%
Permeability	>1 mD
Caprock thickness	>10 m
Ash content	<25%
Methane content	2.5–50 m <sup>3</sup> t <sup>-1</sup>
Coal rank	0.6–1.5%

All the three processes have similar key sub-processes: (1) CO<sub>2</sub> collection and pretreatment; (2) CO<sub>2</sub> compression and transportation; and (3) geologic injection. The CO<sub>2</sub> sources include industries related to generation of power, production of cement, iron and steel, and coal chemicals as well as chemical refineries.<sup>11</sup> Different technologies for gas pretreatment have been adopted due to varying CO<sub>2</sub> concentrations in the flue gas resulting in different corresponding carbon capture costs. For onshore CO<sub>2</sub> transportation, pipeline and tanks are the two primary modes. Results demonstrate that for longer distances, pipeline transportation is relatively more cost-effective due to its larger CO<sub>2</sub> loading capacity.<sup>12</sup> With regard to the CO<sub>2</sub> geologic injection procedure involved in the CO<sub>2</sub>-EOR and CO<sub>2</sub>-ECBM projects, it is much higher in complexity than the first

two sub-processes. Tables 1 and 2 show the criteria for CO<sub>2</sub>-EOR and CO<sub>2</sub>-ECBM projects.<sup>13</sup>

As is evident, the CO<sub>2</sub>-EOR and CO<sub>2</sub>-ECBM processes as well as the economic performances are sensitive to parameters like oil density, oil viscosity, permeability, methane content, and well depth. According to Dahowski,<sup>14</sup> the net costs pertaining to the large CO<sub>2</sub> point sources in China range from less than –\$60 to more than \$200 per ton of CO<sub>2</sub> stored. Sun *et al.*<sup>13</sup> concluded that CO<sub>2</sub>-EOR could be considered the most favorable CCUS technology that deserves highest priority for development in the short and medium term. Kay Damen *et al.*<sup>15</sup> made a comparison between the four CO<sub>2</sub>-EOR and CO<sub>2</sub>-ECBM projects. Results showed that the CO<sub>2</sub> mitigation costs ranged between –3 to 19 €/t CO<sub>2</sub> and 5 to 6 €/t CO<sub>2</sub>, respectively that ratified promising prospects for both the CO<sub>2</sub> reduction methods.

Here, a notable point is that the methane gas generated from the CO<sub>2</sub>-ECBM process can become a source of revenue as feedstock or fuel, with minimal processing; this gives the process a comparative advantage over the CO<sub>2</sub>-EOR process and other CCS processes.

The CO<sub>2</sub>-ECBM process has been studied extensively. A feasibility study on ECBM recovery and CO<sub>2</sub> storage was conducted in Southeast Qinshui Basin, China by Zhou *et al.*<sup>16</sup> Wong *et al.*<sup>17</sup> evaluated the conceptual economic performance of a full-scale CO<sub>2</sub>-ECBM project and concluded that it showed promising prospects for deployment. A laboratory and simulation investigation of ECBM recovery by CO<sub>2</sub> injection was conducted by Fulton *et al.*<sup>18</sup> that demonstrated an increase in the gas recovery efficiency from 36% to 132% with an increase in CO<sub>2</sub> pressure from 0.34 to 1.41 MPa. An experimental study conducted by Philipp Weniger *et al.*<sup>19</sup> revealed that the CO<sub>2</sub> sorption capacities exceeded the methane sorption capacities by a factor of 1.9–6.9 for the coal samples extracted from the Paraná Basin, Brazil. A.S. Ranathunga,<sup>20</sup> in his study, concluded that compared to natural recovery, CO<sub>2</sub> flooding can significantly increase the CH<sub>4</sub> production from low-rank coal seams. However, most of the related researches are on an experimental level. The few field level studies that have been conducted related to CO<sub>2</sub>-ECBM processes are presented in Table 3; they reveal that the impact of CO<sub>2</sub> injection on CH<sub>4</sub> recovery is definitely positive at the field level, although it may vary according to operating conditions and geological settings. A broad body of literature is also available on ECBM theory and mechanisms in detail.<sup>21–24</sup> Most scholars have focused more on coalbed methane production and have only evaluated the CO<sub>2</sub> reduction potential from the perspective of CO<sub>2</sub> sequestration; very few studies have evaluated the benefits of the produced methane.<sup>25,26</sup>

Table 3 Previous field tests on CO<sub>2</sub>-ECBM

Scale	Location	Key findings	Ref.
Field test	San Juan Basin, USA	Gas recovery was enhanced from 77–95% by CO <sub>2</sub> injection	Reeves <sup>27</sup>
Field test	Upper Silesian Basin, Poland	55–70% increase of gas production	Bergen <sup>28</sup>
Micro-piolet test	Ishikari Coal Basin, Japan	Methane production was enhanced by 2–3 times	Fujioka <sup>29</sup>
Micro-piolet test	Qinshui Basin, China	Methane production was enhanced by 2.5–15 times	Wong <sup>10</sup>



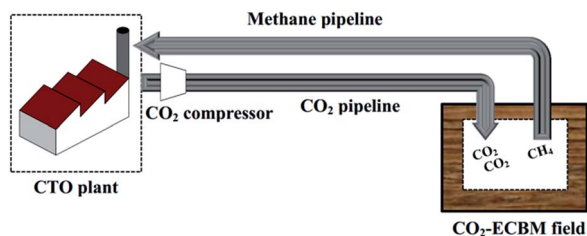


Fig. 2 Schematic of the CO<sub>2</sub>-ECBM process with methane returning to the CTO plant.

In this study, a system consisting of CO<sub>2</sub> capture and compression, CO<sub>2</sub> pipeline transport, CO<sub>2</sub>-ECBM processing, and methane pipeline transport was constructed (see Fig. 2). Taking advantage of the produced methane to displace coal fuel in the CTO plant boilers have the potential for additional CO<sub>2</sub> reduction because methane is much cleaner than fuel coal. A particular CTO plant in China was selected as the study site and the adjacent Ordos Basin was chosen for the CO<sub>2</sub>-ECBM field option. CO<sub>2</sub> resources for ECBM processing were derived from the CTO plant emissions. The produced methane was sent back to substitute for the fuel coal in the CTO plant boilers, which offered a novel low carbon option for the CTO plant. The CO<sub>2</sub> reduction potential and corresponding economic performance were evaluated.

## 2. Methodology

### 2.1 Overview

In this study, CO<sub>2</sub> from a Rectisol® unit was transported to the CBM field and injected into the coalbed, which produced methane. The methane was sent back to the CTO plant to replace the fuel coal in the boilers. Thus, CO<sub>2</sub> emission reductions were derived from both CO<sub>2</sub> sequestration and switching fuels.

A CTO plant in Baotou City, Inner Mongolia Autonomous Region of China was selected as study site. The plant was put into production in 2011 with an olefin capacity of 0.7 Mt/a, which made it the first and largest CTO commercial scale facility.<sup>30</sup> According to the literature,<sup>31</sup> the total emission of the CTO plant was near 6 Mt CO<sub>2</sub>/a. Table 4 shows the CO<sub>2</sub> emission sources as percentages of total emissions. The Rectisol unit

Table 4 CO<sub>2</sub> emissions of the Shenhua Baotou CTO plant

CO <sub>2</sub> sources	Value (Mt/a)	CO <sub>2</sub> concentration (%)	Portion (%)
Rectisol unit	3.60	88.1	60.1
MTO regenerator flue gas	0.11	21.0	2.0
Sulfur recovery flue gas	0.06	28.1	1.0
Steam superheater flue gas	0.03	9.5	0.5
Boiler flue gas	2.18	6.0	36.4
Total	5.98		100.0

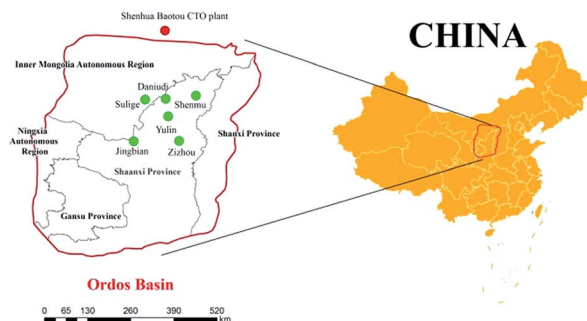


Fig. 3 Location of the CTO plant in Baotou City, Inner Mongolia Autonomous Region of China, and the CO<sub>2</sub>-ECBM field in the Ordos Basin.

accounted for the most emissions, 60.1% of the total, with a CO<sub>2</sub> concentration of 88.1%. Boiler flue gas accounted for 36.4% of total emissions, but the CO<sub>2</sub> concentration was as low as 6.0%. Because the two sources accounted for 96.5% of total emissions, they were the main focus of CO<sub>2</sub> reduction. CO<sub>2</sub> flue gas emissions from the MTO regenerator, sulfur recovery, and steam superheater accounted for the remaining 3.5%.

The treated CO<sub>2</sub> was sent to the gas field in the Ordos Basin through a pipeline. With an area of  $25 \times 10^4$  km<sup>2</sup>, the Ordos Basin is the second largest sedimentary basin in China;<sup>32</sup> it is a few hundred kilometers south of Baotou City (see Fig. 3). The basin has the largest proven reserves of natural gas with  $>500 \times 10^9$  m<sup>3</sup> in newly confirmed annual reserves.<sup>33,34</sup> Six gas fields, Jingbian, Daniudi, Shenmu, Sulige, Zizhou, and Yulin, with  $>1000 \times 10^8$  m<sup>3</sup> of proven reserves have been found in the basin to date.<sup>35</sup> Table 5 presents basic information on the main gas fields in the Ordos Basin;<sup>36,37</sup> it can be noted that most of the fields possess low permeability and high averaged coal layer thickness, indicating that perfect gas sealing conditions are possible. In this study, no specific gas field was identified so the CO<sub>2</sub> transport distance varied. The produced methane was transported back to the CTO plant by pipeline.

Before the economic analysis, a preliminary safety evaluation needs to be performed. Adaptive capacity performance as per the operating conditions differs significantly from one gas field to another due to the differences in geological settings. The main safety risks comprise leakage, pipeline corrosion, and reservoir fracture; the first two risks can be managed effectively through monitoring and maintenance.

Table 5 Basic characteristics of main gas fields in Ordos Basin

Gas fields	Porosity (%)	Permeability (mD)	Thickness (m)	Gas saturation (%)
Jingbian	4.5–7.4	0.6–5.5	3.1–8.1	77%
Daniudi	6.0–10.6	0.4–1.0	5.3–14.8	22%
Shenmu	7.5–7.8	0.6–2.5	5.8–8.8	33%
Sulige	7.0–11.0	0.5–1.0	4.9–11.5	22%
Zizhou	5.8–8.5	0.7–1.3	6.6–9.0	67%
Yulin	6.0–6.6	1.8–8.2	6.5–10.8	35%



However, the third risk, *i.e.*, reservoir fracture, is relatively more complex to manage. It is related to geological characteristics and operating pressure. We use Daniudi gas field as an example. Its caprock is a set of 180–300 m thick lacustrine clastic mudstones with a single layer of thickness up to 30–50 m. The minimum values of porosity and permeability are 6.0% and 0.4 mD, respectively, indicating that the reservoirs have good sealing efficiency and a stable regional distribution. The overpressure was estimated to be as high as 20–25 MPa; much higher than the general CO<sub>2</sub>-ECBM operating pressure.<sup>38,39</sup> As is shown in Table 5, most of the gas fields in the Ordos Basin have similar characteristics of low porosity, permeability and likewise. This fact indicates that the preliminary safety requirements for a CO<sub>2</sub>-ECBM process in the Ordos Basin are met. However, there is a need of a detailed empirical investigation, along with a process simulation, and pilot test specific to the gas reservoir before an actual CO<sub>2</sub>-ECBM process is undertaken.

## 2.2 CO<sub>2</sub> reduction

Total CO<sub>2</sub> reduction consisted of two processes, direct CO<sub>2</sub> sequestration in coalbeds and indirect CO<sub>2</sub> reduction from fuel switching.

Throughout the process, net CO<sub>2</sub> sequestration underperforms the theoretical calculations. This difference is due to CO<sub>2</sub> losses in the capturing and purifying process, leakages in pipelines, and parasitic CO<sub>2</sub> produced from energy use. Therefore, the net CO<sub>2</sub> sequestered in coalbed was set at 79% of the total CO<sub>2</sub> based on calculations by Wong.<sup>17</sup>

The amount of CO<sub>2</sub> reduction from fuel switching was calculated on the basis of low heat value and carbon content per GJ. The low heat value and carbon content for coal fuel are 14.08 GJ t<sup>-1</sup> and 28.00 × 10<sup>-3</sup> t C/GJ, respectively. The low heat value and carbon content for the produced methane are 389.31 GJ/10<sup>4</sup> Nm<sup>3</sup> and 15.30 × 10<sup>-3</sup> t C/GJ, respectively.<sup>3,40</sup>

## 2.3 Economic evaluation methodology

The economic evaluation for CO<sub>2</sub>-ECBM was based on four aspects, total capital cost, annual cost, methane cost, and annual gross profit.

**2.3.1 Capital cost.** We analyzed the capital cost for the whole CO<sub>2</sub>-ECBM process including CO<sub>2</sub> capture and compression, CO<sub>2</sub> pipeline construction, CBM production, and methane pipeline construction.

- *CO<sub>2</sub> capture and compression.* CO<sub>2</sub> from the Rectisol unit needs to be processed using the existing absorption tower and flashing evaporator to concentrate the CO<sub>2</sub> from 88.1% to >98.5%. The CO<sub>2</sub> capture rate will vary from 10% to 100% by switching the operating pressure and temperature. Therefore, the capital cost includes compressors and pumps.

These costs were estimated based on the method described by McCollum and Ogden.<sup>41</sup> This approach adopts a combination of 5-stage compression plus pumping to increase the CO<sub>2</sub> pressure from atmospheric pressure to 15.0 MPa for transportation. An additional parallel compressor train was needed, and the calculated compression power was more than 40 000 kW due to the limits of the single compressor maximum power.

The compression power calculating formulas for each stage are as follows:

$$W_s = \left( \frac{1000}{24 \times 3600} \right) \left( \frac{mZ_sRT_{in}}{M\eta_{is}} \right) \left( \frac{k_s}{k_s - 1} \right) \left[ (CR)^{(k_s-1)/k_s} - 1 \right] \quad (1)$$

$$W_{s-total} = (W_s)_1 + (W_s)_2 + (W_s)_3 + (W_s)_4 + (W_s)_5 \quad (2)$$

$$N_{train} = \text{ROUND}_{UP} \left( \frac{W_{s-total}}{40\,000} \right) \quad (3)$$

where CR = (P<sub>cutoff</sub>/P<sub>initial</sub>)(1/N<sub>stage</sub>); P<sub>cutoff</sub> = 7.38 MPa; P<sub>initial</sub> = 0.1 MPa; N<sub>stage</sub> = 5; R = 8.314 kJ (kmol<sup>-1</sup> K<sup>-1</sup>); M = 44.01 kg kmol<sup>-1</sup>; T<sub>in</sub> = 313.15 K (*i.e.*, 40 °C); η<sub>is</sub> = 0.75; 1000 = kg t<sup>-1</sup>; 24 = h day<sup>-1</sup>; 3600 = s h<sup>-1</sup>; Z<sub>s</sub> = 0.995 (stage 1), 0.985 (stage 2), 0.970 (stage 3), 0.935 (stage 4), 0.845 (stage 5); k<sub>s</sub> = 1.277 (stage 1), 1.286 (stage 2), 1.309 (stage 3), 1.379 (stage 4), 1.704 (stage 5).

Power needs for boosting the pressure of the dense phase CO<sub>2</sub> to the final 15.0 MPa outlet pressure were estimated as follows:

$$W_p = \left( \frac{1000 \times 10}{24 \times 36} \right) \left[ \frac{m \times (P_{final} - P_{cutoff})}{\rho \eta_p} \right] \quad (4)$$

where m = CO<sub>2</sub> mass flow rate (t day<sup>-1</sup>); ρ = 630 kg m<sup>-3</sup>; η<sub>p</sub> = 0.75; 1000 = kg t<sup>-1</sup>; 24 = h day<sup>-1</sup>; 10 = bar MPa<sup>-1</sup>; 36 = m<sup>3</sup> bar h<sup>-1</sup> per kW.

The capital cost of the compressor and pump was based on the following equations:<sup>42</sup>

$$m_{train} = (1000 \times m) / (24 \times 3600 \times N_{train}) \quad (5)$$

$$C_{comp} = m_{train} N_{train} \left[ (0.13 \times 10^6) (m_{train})^{-0.71} + (1.40 \times 10^6) (m_{train})^{-0.60} \ln \left( \frac{P_{cut-off}}{P_{initial}} \right) \right] \quad (6)$$

$$C_{pump} = [(1.11 \times 10^6) \times (W_p/1000)] + 0.07 \times 10^6 \quad (7)$$

where m<sub>train</sub> = CO<sub>2</sub> mass flow rate of each compressor (kg s<sup>-1</sup>).

- *CO<sub>2</sub> pipeline transport.* The capital costs of CO<sub>2</sub> pipelines have been estimated using several models, including linear cost model,<sup>43</sup> flow rates model,<sup>41,44–46</sup> pipeline weight model,<sup>12,47</sup> and quadratic equations.<sup>48,49</sup> In this case, we adopted a model based on the flow rates and pipeline length:<sup>46</sup>

$$I = 77\,854 \times m^{0.4055} \times L + 595\,704 \quad (8)$$

where I = total capital cost of the pipeline; m = mass flow (kg s<sup>-1</sup>); and L = pipeline length (km), which was set to 200 km in the base case.

- *CO<sub>2</sub> enhanced coalbed methane process.* For this part, the capital costs included the investment for CO<sub>2</sub> injecting wells, methane production wells, and field infrastructure. The number of injection wells was the key factor in capital cost, which depends heavily on the CO<sub>2</sub> injection rate. According to field geologic parameters, Dahowski set the injection rates for most of China's hypothetical CO<sub>2</sub>-ECBM fields. In his work, the annual injection rate in the Ordos Basin was evaluated as 200 000 tCO<sub>2</sub> per well.<sup>46</sup> However, data from the very few CO<sub>2</sub>-





ECBM projects indicate that the documented on-site injection rate was much less than the calculated values.<sup>10,16,17</sup> Thus, the annual injection rate of 14 000 tCO<sub>2</sub> per well was applied in this study, based on the results of the only large-scale CO<sub>2</sub>-ECBM project to date, in the San Juan Basin of New Mexico, USA.<sup>50</sup> The injection-to-production well ratio was set as 1 : 1.22, referring to a full-scale conceptual CO<sub>2</sub>-ECBM project in Qinshui Basin, Shanxi Province, China.<sup>17</sup> Capital costs were estimated for wells and infrastructure as follows:<sup>51,52</sup>

$$C_{\text{well}} = 1\,000\,000 \times 0.127e^{0.0008z} + 530.7 \quad (9)$$

$$C_{\text{infrastructure}} = 43\,600 \times \sqrt{\frac{7389}{280n}} \quad (10)$$

where  $z$  = well depth in m and  $n$  = number of wells in the field; a well depth of 500 m was adopted for the base case.

• **Methane transport.** Currently, Pipeline transport of Natural Gas (PNG) is a booming market in China. Because the technology is mature, researchers have rich experience in estimating capital cost. In this study, the capital cost of constructing a natural gas pipeline was calculated on the basis of  $2 \times 10^6$  RMB km<sup>-1</sup>.<sup>53</sup>

**2.3.2 Operation and maintenance (O&M) cost.** There are different methods for O&M cost estimates for each part of the process. In the literature, annual O&M costs are generally expressed as a percentage of capital costs, which are generally in the range of 1.5–4.0%.<sup>14,54</sup> Equations and fixed value per unit are also applied in various methods,<sup>55,56</sup> derived from large amounts of data analysis or experience. In this work, the annual O&M costs were expressed as a fixed 2.0% of the total capital cost.

**2.3.3 Energy cost.** In this study, energy consumption was mainly caused by CO<sub>2</sub> purifying units at the CTO plant, compressors and pumps, and was easily estimated from electricity consumption. The energy use in the CO<sub>2</sub>-ECBM field and during methane transport was neglected because the methane pressure after production was usually high enough to move the short distance, less than 500 km, from the field to CTO without additional boosters or pumps.<sup>57</sup> The energy consumption data was obtained from Xiang.<sup>58</sup> The electricity price was set as \$0.1 kW h<sup>-1</sup>.<sup>59</sup>

**2.3.4 Annual cost and methane cost.** The annual cost was selected as the index consisting of annualized capital, O&M, and energy costs. A capital recovery factor of 0.15 was applied to annualize the capital cost. Annual cost and methane cost were calculated as follows:

$$C_{\text{annual}} = C_{\text{total capital}} \times \text{CRF} + C_{\text{O\&M}} + C_{\text{energy}} \quad (11)$$

$$C_{\text{methane}} = C_{\text{annual}}/P_{\text{methane}} \quad (12)$$

where CRF = capital recovery factor (%) and  $P_{\text{methane}}$  = annual methane production (Nm<sup>3</sup>).

**2.3.5 Annual gross profit.** Annual gross profit was calculated based on annual revenue and annual cost, while annual revenue was obtained by adding the revenue due to avoiding the carbon tax and methane sales.

## 2.4 Basic assumptions

The purpose of the economic calculations was to determine the economic feasibility and appeal of the project with the adopted parameters. Some assumptions were required due to the lack of documented variables, which are described as follows.

The CTO plant and CO<sub>2</sub>-ECBM process were assumed to operate 8000 hours annually. The pipeline length for CO<sub>2</sub> and methane were set to 200 km for the base case.

No boosters were considered for CO<sub>2</sub> and methane pipeline transport. For CO<sub>2</sub> transport, the pressure drops may be fairly small for short distance transportation. For methane transport, the methane can be delivered back to the CTO plant by taking advantage of the high pressure during methane production.

We also assumed that every 1 molecule of methane production requires 2 molecules of CO<sub>2</sub> injection, and no breakthrough will occur for the lifetime of the CO<sub>2</sub>-ECBM process.

All costs are expressed in U.S. dollars and converted to 2015 dollars by using the Chemical Engineering Plant Cost Index without taking tax into account.<sup>60</sup> The exchange rate between US dollars and RMB was set to 6.39 according to the average exchange rate of 2015.<sup>61</sup>

## 3. Results and discussion

### 3.1 CO<sub>2</sub> reduction

As indicated previously, CO<sub>2</sub> reduction was achieved using both CO<sub>2</sub> sequestration and switching fuels. Furthermore, CO<sub>2</sub> reduction from the sequestration process was set to 79% of the initially calculated value.

As shown in Fig. 4, the CO<sub>2</sub> sequestration curve is linear because CO<sub>2</sub> reduction was calculated based on a fix percentage. The reduction from switching fuels continues to increase until the CCR reaches 59.4%, subsequently, no further reductions from switching fuels occurs, which causes a slight decrease in the total reduction trend. At a CCR of 59.4%, the fuel coal used for CTO plant boilers has been totally substituted with coalbed methane. Nonetheless, it is evident that the total emission reduces significantly as the CCR increases. For example, the

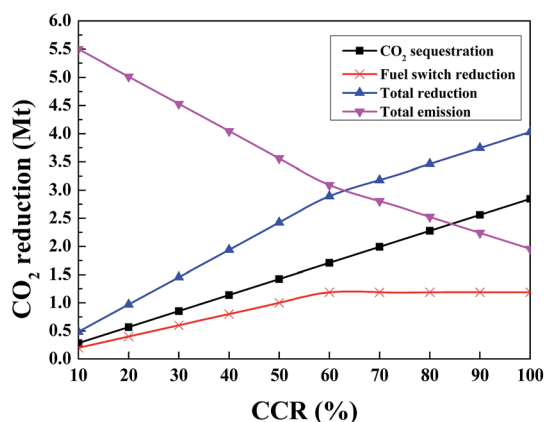


Fig. 4 Variations in CO<sub>2</sub> reductions and emissions at different CCR.



total emission drops from 5.98 Mt/a to 2.52 Mt/a when CCR is 80%, which represents a 58% CO<sub>2</sub> reduction in emissions, of which 34% is contributed from switching fuels.

### 3.2 Economic performance

**3.2.1 Total capital cost.** Fig. 5 shows the variation in total capital and constituent costs with CCR ranging from 10% to 100%. The total capital cost increases with CO<sub>2</sub> capture rate, although the capital cost for wells, infrastructure, and pipeline are constant regardless of CCR. The capital cost for methane pipeline does not change with CO<sub>2</sub> capture rate because methane pipeline costs were based on pipeline length. From Fig. 5, it is clear that a CCR of 80% is a threshold, increasing CCR beyond this point leads to significant increases in capital cost for CO<sub>2</sub> capture and compression. This threshold is due to the power requirements above a CCR of 88.5%, 318.54 Mt/a. At this value, the single compressor reaches the maximum power limit of 40 000 kW, so a parallel compressor will be needed, which causes an obvious increase in CO<sub>2</sub> compression capital costs.

The capital cost per unit of CO<sub>2</sub> capture capacity was selected as the economic index. As shown in Fig. 5, capital costs per unit of CO<sub>2</sub> capture capacity decreases dramatically when the CO<sub>2</sub> capture rate increases from 10% to 80%; CCR greater than 80% shows no additional cost benefit. Therefore, from the perspective of capital cost, the capture rate should be set to 80%.

To gain a better insight into the impact of each constituent cost, a breakdown of capital cost items for the CCRs of 70%, 80%, and 90% are shown in Fig. 6–8; this highlights the variations around the threshold CCR of 80%. As shown, capital cost proportions for CCR 70% and 80% follow the same ranking: CO<sub>2</sub> pipeline, wells and infrastructures, methane pipeline, and CO<sub>2</sub> capture and compression in order of decreasing capital cost. For a CCR of 80%, the capital cost for CO<sub>2</sub> pipeline accounts for 33.17% of the total cost, while wells and infrastructure capital cost account for 32.96%, and methane pipeline and CO<sub>2</sub> compression account for 19.38% and 14.49%, respectively. However, for a CCR of 90%, the capital costs for wells and

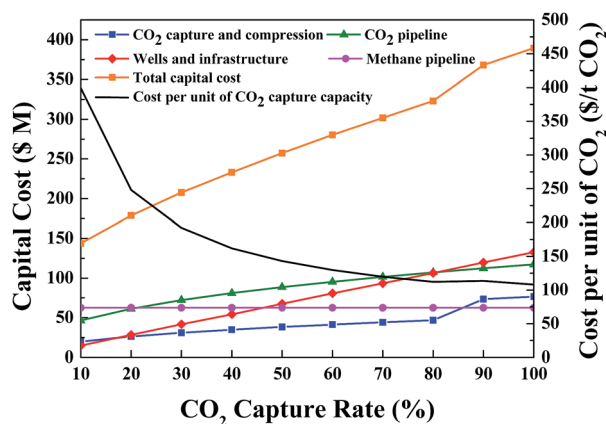


Fig. 5 Variations in total capital and constituent costs and costs normalized to capture capacity with changing CCR.

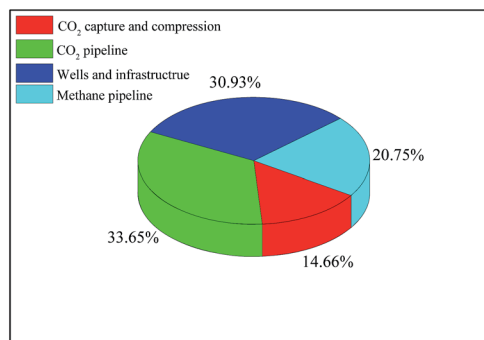


Fig. 6 Breakdown of capital cost items for a CCR of 70%.

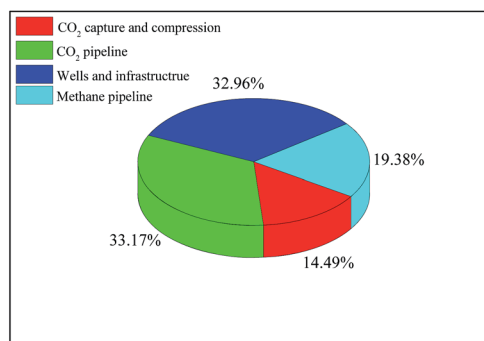


Fig. 7 Breakdown of capital cost items for a CCR of 80%.

infrastructure are dominant, followed by CO<sub>2</sub> pipeline, CO<sub>2</sub> capture and compression, and methane pipeline.

**3.2.2 Annual cost and methane cost.** The annual cost index was comprised of annualized capital, O&M, and energy costs. The capital recovery factor of 0.15 was applied to annualize the capital costs, and the results are shown in Fig. 9–11.

As Fig. 9 indicates, annual costs increase with increasing CCR, with an increase in annual cost rate at the CCR threshold of 80%. This observation reiterates that the optimal CCR ranges between 80% and 90%, which was found in the previous capital cost results. This range provides economically reasonable annual costs.

Energy and well and infrastructure costs show large changes in annual cost growth. The 10% and 80% CCRs were taken as

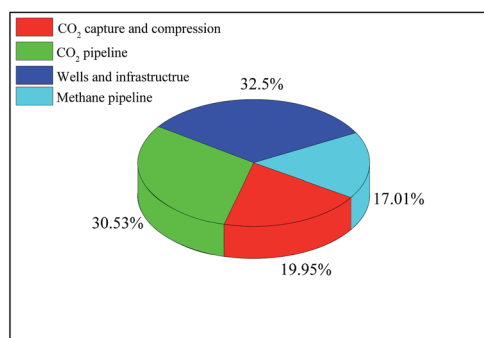


Fig. 8 Breakdown of capital cost items for a CCR of 90%.



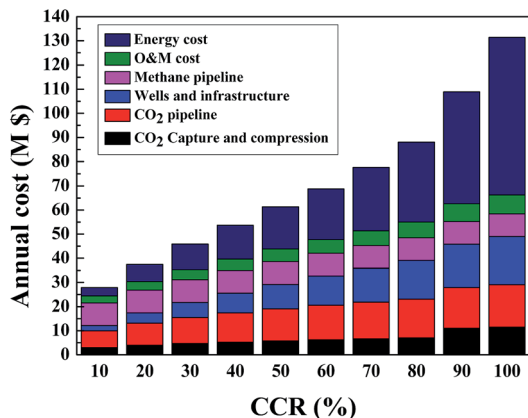


Fig. 9 The annual cost variations due to changing CCR.

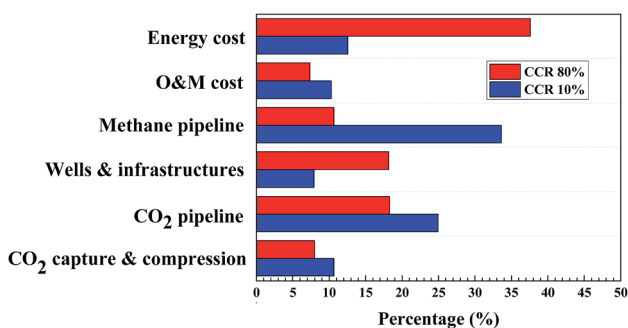


Fig. 10 Proportional changes in annual costs for CCRs of 10% and 80%.

examples to compare the proportional changes (see Fig. 10). As shown, annual costs from the methane pipeline accounts for the highest proportion (33.6%) at a CCR of 10%, followed by CO<sub>2</sub> pipeline costs of 25.0% and energy costs of 12.6%. In comparison, at a CCR of 80%, energy costs account for the highest proportion of annual costs (37.6%), followed by CO<sub>2</sub> pipeline costs of 18.3% and wells and infrastructure costs of 18.1%. Clearly, energy use becomes the dominant cost as CCR increases. In addition, the CO<sub>2</sub> capture rate has relatively greater influence on annual cost than those from CO<sub>2</sub> and methane pipelines, wells and infrastructures, O&M, and CO<sub>2</sub> capture and compression.

To obtain a better understanding of the economic performance, the cost per cubic meter ( $\$/\text{Nm}^{-3}$ ) of methane was evaluated (see Fig. 11). Clearly, the unit volume cost drops conspicuously prior to CCR 60%, after which the downward trend flattens until the trend goes up for CCR greater than 80%. This indicates that the optimal CCR is between 70–80%, slightly different than the optimal value derived from annual costs. When the CCR was set as 80%, the cost for per cubic meter of methane was as low as  $\$0.12\text{ Nm}^{-3}$ . This is much cheaper than the current market price of Chinese methane, which is about  $\$0.30\text{ Nm}^{-3}$ .

**3.2.3 Effect of carbon tax.** Carbon tax and methane sale should be taken into consideration when evaluating the economic advantages of the project because these may facilitate

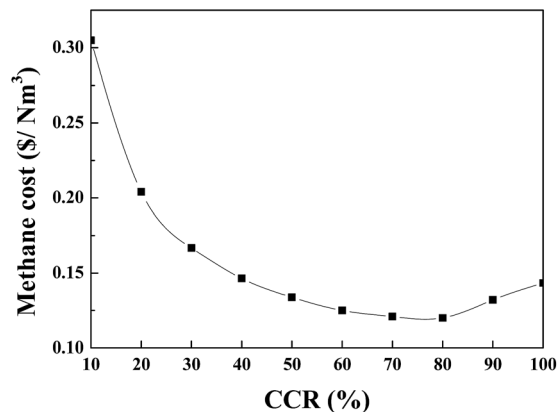


Fig. 11 Variations in methane costs, in units of per cubic meter, with changing CCR.

indirect benefits due to policy. The carbon tax is a fee that the energy company will pay the government for CO<sub>2</sub> emissions. In this case, the carbon tax can be avoided due to reduction and sequestration. Furthermore, sales of excess methane not used in the facility were considered revenue. Four carbon tax scenarios,  $\$10\text{ t}^{-1}\text{ CO}_2$ ,  $\$20\text{ t}^{-1}\text{ CO}_2$ ,  $\$30\text{ t}^{-1}\text{ CO}_2$ , and  $\$40\text{ t}^{-1}\text{ CO}_2$ , were evaluated. We assumed that excess methane would be sold at a price of  $\$0.3\text{ Nm}^{-3}$  when the CCR is greater than the critical point of 59.4%. Fig. 12 shows the results of economic performance for the four carbon tax scenarios. A clear upward trend is shown after the CCR critical point of 59.4% because the revenue from methane is much higher than the carbon tax. The intersections of annual cost curve and revenue curves are the breakeven points; clearly, higher carbon taxes lead to smaller corresponding CCRs to breakeven. For example, in the scenario with a carbon tax  $\$10\text{ t}^{-1}\text{ CO}_2$ , the breakeven point appears when the CCR nearly reaches 80%. However, the breakeven point is reached at a CCR of 20% in the scenario with a carbon tax of  $\$40\text{ t}^{-1}\text{ CO}_2$ . Synthesizing these results from the results discussed in Sections 3.2 and 3.3.1, the optimal CCR is between 70% to 80%, CO<sub>2</sub>-ECBM technology will only be economically feasible if the carbon tax is  $\geq \$10\text{ t}^{-1}\text{ CO}_2$  in this interval. Furthermore, higher

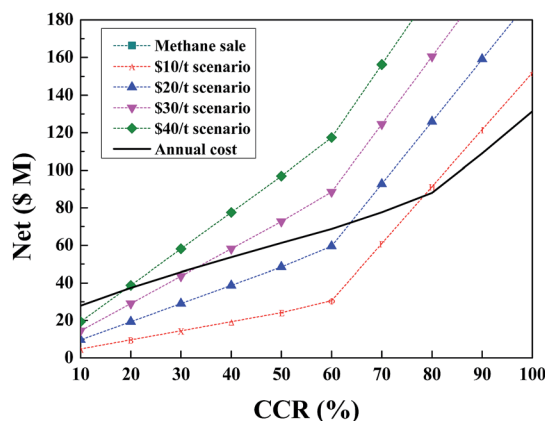


Fig. 12 The net annual costs compared to net annual revenue from six different carbon tax scenarios.



Table 6 Parameters for base case and adjustments used in the sensitivity analysis

Parameters	Base case	Adjusted values
Carbon tax (\$ t <sup>-1</sup> CO <sub>2</sub> )	30	20, 40
CCR (%)	60	50, 70
Distance (km)	200	100, 300
Capital recovery factor (%)	15	12.5, 17.5
Injection rate (t/a per well)	14 000	10 000, 18 000
O&M percentage (%)	2.0	1.5, 2.5
Coal depth (m)	500	400, 600
Methane price (\$ m <sup>-3</sup> )	0.30	0.25, 0.35

carbon taxes, \$20 t<sup>-1</sup> CO<sub>2</sub> or even higher in the next few years, will make the application of CO<sub>2</sub>-ECBM technology for CTO plants even more attractive economic prospects.

### 3.3 Sensitivity analysis

A sensitivity analysis was conducted to evaluate the economic performances due to the uncertainties in some of the assumptions. The base case was set to make comparisons, and fluctuations in annual gross profit are due to changes in the main parameters (see Table 6). The annual gross profit for the base case was calculated as \$19.75 M. The parameters investigated were carbon tax, CCR, pipeline distance, capital recovery factor, CO<sub>2</sub> injection rate, O&M percentage, coal depth, and methane price. Results of the sensitivity analysis demonstrate the sensitivity of annual gross profit to parameter values (see Fig. 13).

Fig. 13 indicates that the carbon tax, CCR, and distance are the three main factors that affect annual gross profit. It is most sensitive to carbon tax because this parameter is the main revenue stream. The annual gross profit from the case with a \$40 t<sup>-1</sup> CO<sub>2</sub> carbon tax is nearly 2.5 times higher than the base case. Interestingly, the influence of the CCR increase is much larger than that of a CCR decrease even though the ranges are the same. This indicates that the CCR should be set higher than 60% to maintain profitability. Annualization and injection rates were less sensitive factors, which depend heavily on the lifetime of the equipment and technology, respectively. These two factors will be the main considerations for calculating the economic forecast. Finally, reasonable changes in O&M percentage, coal depth, and methane price do not significantly influence annual gross profit.

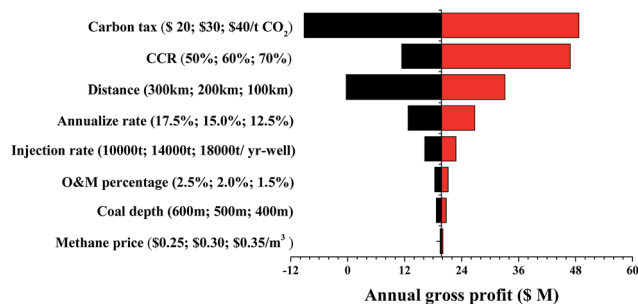


Fig. 13 Sensitivity analysis of annual gross profit based on changing the values of the listed parameters.

## 4. Conclusion

In this work, a CO<sub>2</sub> reduction system using CO<sub>2</sub>-ECBM and extracted methane as an alternate fuel in a CTO plant was evaluated. The CO<sub>2</sub> reduction potential and corresponding economic performance of the system was examined. A number of conclusions can be drawn from the results:

- The power of one compressor will meet the compression demands for CCRs below 88.5%; above this threshold, another compressor will be needed, which will cause increase the capital costs significantly.
- The capital cost per unit of CO<sub>2</sub> capture capacity decreases dramatically when the CO<sub>2</sub> capture rate rises from 10% to 80%, then the trend stabilizes to a nearly constant value. This indicates that the optimal CCR to minimize capital cost is 80%.
- Total capital costs are dominated by cost for wells and infrastructures; for CCR above 50%, CO<sub>2</sub> pipeline costs dominate the capital costs.
- An economical reasonable CCR range is proposed as 80–90% from an annual cost perspective.
- Energy costs grow most rapidly with increasing CCR, followed by costs for wells and infrastructure. The proportional constituent costs are ranked in the same order for all CCRs, even for those above 80%.
- An optimal CCR range of 70–80% was proposed based on methane cost.
- A CCR of 59.4% is a critical point for this particular CTO plant because complete fuel switching from coal to methane occurs.
- A CCR of 80%, results in a 58% reduction in CO<sub>2</sub> emissions; of this reduction, CO<sub>2</sub> sequestration and switching fuels account for roughly 66% and 34%, respectively.
- In the optimal CCR interval of 70–80%, a minimum carbon tax of \$10 t<sup>-1</sup> CO<sub>2</sub> makes the project feasible; carbon taxes greater than \$20 t<sup>-1</sup> CO<sub>2</sub> generates substantial profits.
- Carbon tax, CCR, and pipeline distance are significant when the annual gross profit was used as an index. The impacts of capital recovery factor and injection rate are relatively small.

## Conflicts of interest

There are no conflicts to declare.

## Acknowledgements

Funding for this work was provided by the China National Petroleum Corporation (CNPC) under grant 016E-1209. We thank the CNPC Research Institute of Safety & Environment Technology and Shenhua Group Corporation for access to their database.

## Notes and references

- 1 H. Zhou, Y. Qian and S. Yang, *Appl. Energy*, 2015, **156**, 344–353.
- 2 Q. Zhang, S. Hu and D. Chen, *J. Cleaner Prod.*, 2017, **165**, 1351–1360.





- 3 National Bureau of Statistics, *China energy statistics yearbook* (in Chinese), China Stat. Press, Beijing, China, 2016.
- 4 D. Xiang, Y. Qian, Y. Man and S. Yang, *Appl. Energy*, 2014, **113**, 639–647.
- 5 B.-Y. Yoo, *Energy*, 2017, **121**, 772–780.
- 6 A. I. Escudero, S. Espotolero, L. M. Romeo, Y. Lara, C. Paufigue, A.-L. Lesort and M. Liszka, *Appl. Therm. Eng.*, 2016, **103**, 274–281.
- 7 C. C. Cormos, *Int. J. Hydrogen Energy*, 2014, **39**, 13–27.
- 8 B. S. Koelbl, M. A. van den Broek, B. J. van Ruijven, A. P. C. Faaij and D. P. van Vuuren, *Int. J. Greenhouse Gas Control*, 2014, **27**, 81–102.
- 9 M. M. F. Hasan, R. C. Baliban, J. A. Elia and C. A. Floudas, *Ind. Eng. Chem. Res.*, 2012, **51**, 15642–15664.
- 10 S. Wong, D. Law, X. Deng, J. Robinson, B. Kadatz, W. D. Gunter, Y. Jianping, F. Sanli and F. Zhiqiang, *Int. J. Greenhouse Gas Control*, 2007, **1**, 215–222.
- 11 Technology Roadmaps Carbon Capture and Storage in Industrial Applications, [http://www.iea.org/publications/freepublications/publication/ccs\\_industry.pdf](http://www.iea.org/publications/freepublications/publication/ccs_industry.pdf).
- 12 L. Gao, M. Fang, H. Li and J. Hetland, *Energy Procedia*, 2011, **4**, 5974–5981.
- 13 L. Sun, H. Dou, Z. Li, Y. Hu and X. Hao, *J. Energy Inst.*, 2017, DOI: 10.1016/j.joei.2017.08.002.
- 14 R. T. Dahowski, C. L. Davidson, X. C. Li and N. Wei, *Int. J. Greenhouse Gas Control*, 2012, **11**, 73–85.
- 15 K. Damen, A. Faaij, F. van Bergen, J. Gale and E. Lysen, *Energy*, 2005, **30**, 1931–1952.
- 16 F. Zhou, W. Hou, G. Allinson, J. Wu, J. Wang and Y. Cinar, *Int. J. Greenhouse Gas Control*, 2013, **19**, 26–40.
- 17 S. Wong, D. Macdonald, S. Andrei, W. D. Gunter, X. Deng, D. Law, J. Ye, S. Feng, Z. Fan and P. Ho, *Int. J. Coal Geol.*, 2010, **82**, 280–286.
- 18 P. F. Fulton, C. A. Parente, B. A. Rogers, N. Shah and A. A. Reznik, A Laboratory Investigation Of Enhanced Recovery Of Methane From Coal By Carbon Dioxide Injection, SPE-8930-MS, *SPE Unconventional Gas Recovery Symposium*, Society of Petroleum Engineers, Pittsburgh, Pennsylvania, 18–21 May 1980.
- 19 P. Weniger, W. Kalkreuth, A. Busch and B. M. Krooss, *Int. J. Coal Geol.*, 2010, **84**, 190–205.
- 20 A. S. Ranathunga, M. S. A. Perera, P. G. Ranjith and C. H. Wei, *Fuel*, 2017, **189**, 391–399.
- 21 F. B. Gorucu, S. A. Jikich, G. S. Bromhal, W. N. Sams, T. Ertekin and D. H. Smith, *SPE Reservoir Eval. Eng.*, 2007, **10**(4), 382–392.
- 22 G. Yin, B. Deng, M. Li, D. Zhang, W. Wang, W. Li and D. Shang, *Fuel*, 2017, **196**, 288–297.
- 23 X. Sun, Y. Zhang, K. Li and Z. Gai, *Fuel*, 2016, **183**, 478–488.
- 24 H. Wang, Q. Ran, X. Liao, X. Zhao, M. Xu and P. Fang, *J. Nat. Gas Sci. Eng.*, 2016, **33**, 678–686.
- 25 N. Mallick and V. Prabu, *J. CO<sub>2</sub> Util.*, 2017, **19**, 16–27.
- 26 V. Sarhosis, A. A. Jaya and H. R. Thomas, *Energy*, 2016, **107**, 580–594.
- 27 S. Reeves and A. Oudinot, *The Allison Unit CO<sub>2</sub>-ECBM Pilot – A Reservoir and Economic Analysis*, Advanced Resources International, Inc, 2005, <http://www.adv-res.com/Coal-Seq-Consortium/ECBM-Sequestration-Knowledge-Base/CBM%20Symposium%202005/0522.pdf>.
- 28 F. van Bergen, H. Pagnier and P. Krzystolik, *Field experiment of CO<sub>2</sub>-ECBM in the Upper Silesian Basin of Poland*, [http://www.adv-res.com/Coal-Seq-Consortium/ECBM-Sequestration-Knowledge-Base/GHGT-8%202006/02\\_05\\_04.pdf](http://www.adv-res.com/Coal-Seq-Consortium/ECBM-Sequestration-Knowledge-Base/GHGT-8%202006/02_05_04.pdf).
- 29 M. Fujioka, S. Yamaguchi and M. Nako, *Int. J. Coal Geol.*, 2010, **82**, 287–298.
- 30 X. Ling, *Bull. Chin. Acad. Sci.*, 2011, **25**, 128–130.
- 31 X. Wu, *Process and Engineering of Coal to Light Olefins*, Chemical Industry Press, Beijing, China, 2014.
- 32 S. Huang, X. Fang, D. Liu, C. Fang and T. Huang, *Int. J. Coal Geol.*, 2015, **152**, 132–143.
- 33 M. Jingkui, H. Kun, T. Shizhen, Y. Chun and S. Mengmeng, *J. Geochem. Explor.*, 2016, **171**, 133–140.
- 34 X. Wei, H. Chen, D. Zhang, R. Dai, Y. Guo, J. Chen, J. Ren, N. Liu, S. Luo and J. Zhao, *Pet. Explor. Dev.*, 2017, **44**, 347–357.
- 35 H. Yang and X. Liu, *Pet. Explor. Dev.*, 2014, **41**, 144–152.
- 36 J. Zhang, C. Yu, S. Huang, D. Gong, W. Wu, C. Fang and D. Liu, *Pet. Explor. Dev.*, 2014, 1–13.
- 37 G. Wei, J. Li, Z. Xie, W. Yang, D. Wang and Z. Zhao, *Acta Pet. Sin.*, 2013, 1–13.
- 38 Q. Liu, Z. Jin, Q. Meng, X. Wu and H. Jia, *J. Asian Earth Sci.*, 2015, **107**, 1–11.
- 39 Z. Yang, S. He, C. Zou, Q. Li and Z. Chen, *Acta Pet. Sin.*, 2010, **31**, 373–378.
- 40 IPCC 2006, *2006 IPCC Guidelines for National Greenhouse Gas Inventories*, Prepared by the National Greenhouse Gas Inventories Programme, ed. H. S. Eggleston, L. Buendia, T. Ngara and K. Tanabe, IGES, Japan, 2006.
- 41 D. L. McCollum and J. M. Ogden, *Techno-economic models for carbon dioxide compression, transport, and storage and correlations for estimating carbon dioxide density and viscosity*, Report UCD-ITS-RR-06-14, Institute of transportation studies, University of California, Davis, CA, 2006.
- 42 C. Hendriks, W. Graus and F. v. Bergen, *Global carbon dioxide storage potential and costs*, Report EEP-02001, Ecofys & TNO-NITG, 2004.
- 43 M. van den Broek, E. Brederode, A. Ramírez, L. Kramers, M. van der Kuip, T. Wildenborg, W. Turkenburg and A. Faaij, *Environ. Model. Software*, 2010, **25**, 1754–1768.
- 44 M. K. Chandel, L. F. Pratson and E. Williams, *Energy Convers. Manage.*, 2010, **51**, 2825–2834.
- 45 J. Serpa, J. Morbee and E. Tzimas, *Technical and Economic Characteristics of a CO<sub>2</sub> Transmission Pipeline Infrastructure*, Report JRC62502, European Commission Joint Research Centre Institute for Energy, Netherlands, 2011.
- 46 R. T. Dahowski, X. Li, C. L. Davidson, N. Wei and J. Dooley, *Regional opportunities for carbon dioxide capture and storage in China. A comprehensive CO<sub>2</sub> storage cost curve and analysis of the potential for large scale carbon dioxide capture and storage in the People's Republic of China*, Report PNNL-19091, Prepared for the U.S. Department of Energy, Richland, Washington, DC, 2009.



- 47 K. Piessens, B. Laenen, W. Nijs and J. M. Baele, *Policy support system for carbon capture and storage*, Report SD/CP/04A, Royal Belgian Institute of Natural Science, Belgium, 2008.
- 48 N. Parker, *Using natural gas transmission pipeline costs to estimate hydrogen pipeline costs*, Report UCD-ITS-RR-04-35, Institute of transportation studies, University of California, Davis, CA, 2004.
- 49 *Pipeline transmission of CO<sub>2</sub> and energy*, Report PH4/6, International Energy Agency, GreenHouse Gas R&D Programme, 2002.
- 50 S. Reeves, A. Taillefert and L. Pekot, *The Allison Unit CO<sub>2</sub> – ECBM Pilot: A Reservoir Modeling Study*, U.S. Department of Energy & Advanced Resources International, Houston, TX, 2003.
- 51 M. Z. Lukawski, B. J. Anderson, C. Augustine, L. E. Capuano Jr, K. F. Beckers, B. Livesay and J. W. Tester, *J. Pet. Sci. Eng.*, 2014, **118**, 1–14.
- 52 C. Augustine, J. W. Tester and B. J. Anderson, *A Comparison of Geothermal with Oil and Gas Well Drilling Costs*, Report SGP-TR-179, Stanford University, California, USA, 2006.
- 53 P. Gao, Z. Tan, G. Liu and P. Wang, *International Petroleum Economics*, 2017, **25**, 26–33.
- 54 ElementEnergy, *CO<sub>2</sub> pipeline Infrastructure: An analysis of global challenges and opportunities*, International Energy Agency Greenhouse Gas Programme, 2010.
- 55 B. Bock, R. Rhudy, H. Herzog, M. Klett, J. Davison, D. G. De La Torre Ugarte and D. Simbeck, *Economic evaluation of CO<sub>2</sub> storage and sink enhancement options*, Report DE-FC26-00NT40937, TVA Public Power Institute, 2003.
- 56 S. T. McCoy and E. S. Rubin, *Int. J. Greenhouse Gas Control*, 2008, **2**, 219–229.
- 57 M. Yan, L. Lian and Z. Wang, *Natural Gas Distribution Engineering*, China Construction Industry Press, 2005.
- 58 D. Xiang, S. Yang, X. Liu, Z. Mai and Y. Qian, *Chem. Eng. J.*, 2014, **240**, 45–54.
- 59 <http://gas.in-en.com/html/gas-2573671.shtml>.
- 60 CEPCI, Chemical Engineering Plant Cost Index (CEPCI), <https://zh.scribd.com/doc/310334114/CEPCI-February-2016-pdf>.
- 61 List of Exchange Rate Quotation of Bank of China, <http://srh.bankofchina.com/search/whpj/search.jsp>.

