



Cite this: *RSC Adv.*, 2020, 10, 7396

# Sonochemical degradation of pesticides in aqueous solution: investigation on the influence of operating parameters and degradation pathway – a systematic review

Meghdad Pirsaeheb and Negin Moradi \*

Along with the wide production, consumption and disposal of pesticides in the world, the concerns over their human and environmental health impacts are rapidly growing. Among developing treatment technologies, sonochemistry as an emerging and promising technology for the removal of pesticides in the aqueous environment has attracted the attention of many researchers in recent years. This systematic review presents an extensive study of sonochemical degradation of different types of pesticides from aqueous solution. The influence of various parameters including reactor configurations, initial concentration of pesticide, ultrasonic frequency, intensity of irradiation, bulk solution temperature, operational pH and sonication time on the degradation efficiency has been analyzed. The mechanism of ultrasonic degradation has been discussed, and recommendations for optimum operating conditions have been reported for maximizing degradation efficiency. Additionally, the intensification of ultrasonic cavitation by combining with oxidation processes was overviewed and the main advantages and disadvantages were pointed out, in order to address future studies and promote efficient large-scale operations. As a conclusion, it appears that ultrasonic irradiation can be effectively used for intensification of the degradation of pesticides from aqueous solution.

Received 30th December 2019  
Accepted 6th February 2020

DOI: 10.1039/c9ra11025a

rsc.li/rsc-advances

## 1. Introduction

Pesticides are agrochemicals widely used worldwide in agriculture and forestry, on sports fields, public urban green areas, industrial sites, educational facilities, *etc.*<sup>1,2</sup> Pesticides are typically applied in order to protect plants from pests, diseases, overgrowth by weeds and humans from vector-borne diseases.<sup>3</sup> Based on function and the target pest organism pesticides can be classified into: insecticides (insects), fungicides (fungi), bactericides (bacteria), herbicides (weed), acaricides (mites), rodenticides (mice and other rodents), algaecides (algae), larvicides (larvae) and repellents. Others include: desiccants, ovicides (insects and mites), virucides (viruses), molluscicides (slugs and snails), nematocides (nematode), avicides (birds), moth balls (mold or moth larvae), lampricides (lampreys), piscicides (fishes), silvicultures (woody vegetation) and termiticides (termites).<sup>4,5</sup> Depending on the chemical composition and nature of active ingredients, pesticides are classified into four main groups namely; organochlorines, organophosphorus, carbamates and synthetic pyrethroids.<sup>6,7</sup>

Despite the noticeable benefits of using pesticides in agricultural production and the help in mitigating food scarcity and controlling infectious diseases, their use also poses serious threats to ecosystems.<sup>8,9</sup> Their fate in the environment is of great concern, since many sources like agricultural runoffs and industrial sewage spread them into soil and surface water or groundwater. Pesticides cause serious health hazards to human health due to direct exposure or through residues in food and drinking water.<sup>10</sup> A typical pesticide cycle in an ecosystem is schematically represented in Fig. 1. Pesticides hold a unique position among environmental contaminants of today's world due to their toxicity, high biological activity, long-term stability and bioaccumulative.<sup>11</sup> Therefore, it is imperative to develop efficient treatment approaches for the removal of residual pesticides.

So far, several treatment techniques such as biological, physical, chemical and physicochemical methods have been investigated for removal of pesticides from different types of matrices, such as water and soil.<sup>6</sup> The biological remediation process depends on numerous factors, such as pH, temperature, soil moisture content, nutrient availability and oxygen level.<sup>12,13</sup> Physical methods including nanofiltration and adsorption using various materials such as clays, zeolite, carbon nanotubes, activated carbon, and polymeric materials are very common for eliminating pesticides from water. However, major

Research Center for Environmental Determinants of Health, Department of Environmental Health Engineering, School of Public Health, Kermanshah University of Medical Sciences, Kermanshah, Iran. E-mail: negin.moradi724@yahoo.com; Tel: +989188867003



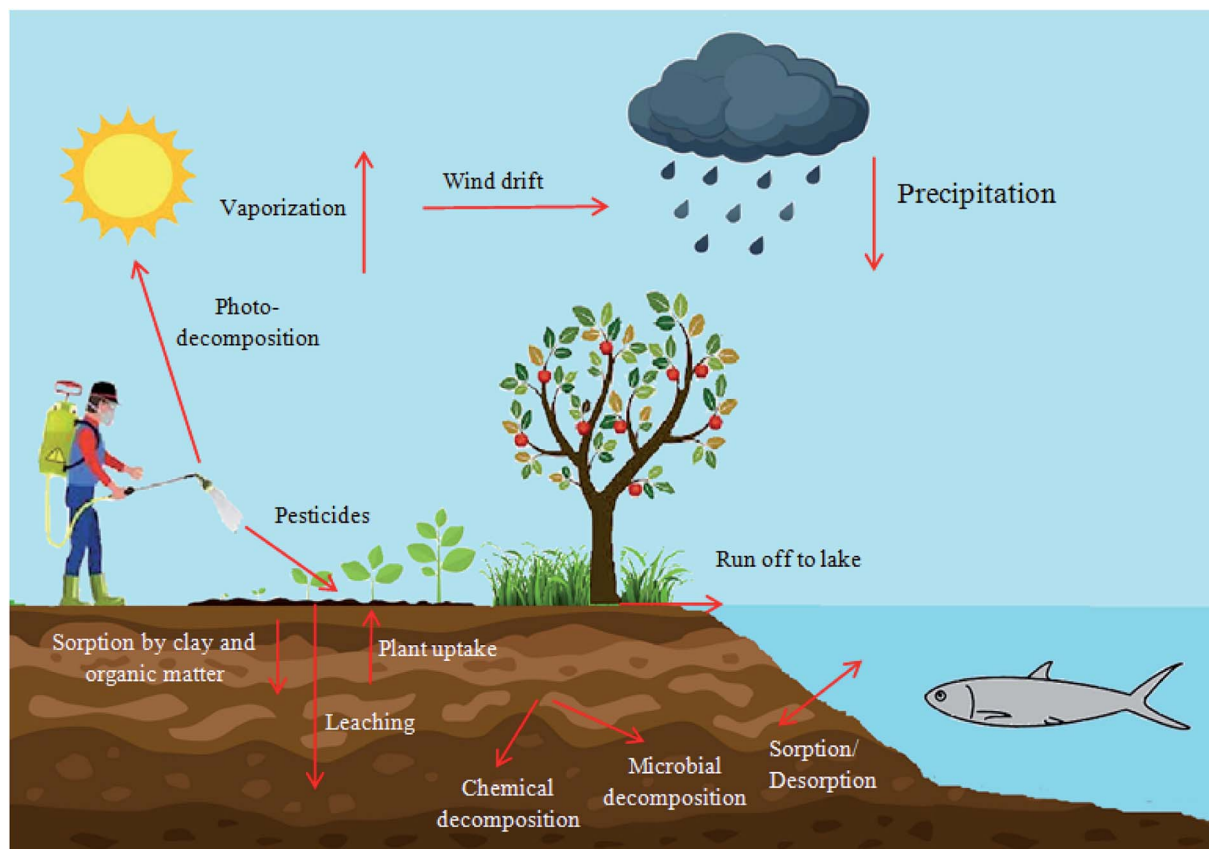


Fig. 1 A schematic view of the pesticide cycle in an ecosystem.

limitations of these processes are slow kinetics, dependency on the mobility and polarity of pesticides sites, high sorbent costs, capital investment and the high processing temperatures.<sup>14</sup> In addition, physical processes such as adsorption merely transfer pollutants from one phase to another phase creating problems of secondary pollution. Also, utilization of chemical methods is not efficient but because of high consumption of chemicals, high treatment cost, incomplete removal, and time consuming.<sup>15</sup> The physicochemical methods based on the production and use of hydroxyl radicals, named advanced oxidation processes (AOPs) have shown to be very efficient to remove different organic compounds from aqueous solutions.<sup>16,17</sup>

Among the different existing AOPs, ultrasound (US) irradiation has been recently attracting considerable attention for the degradation of organic and inorganic pollutants in water and wastewater such as pesticides.<sup>18</sup> Ultrasound, as a newly developed treatment technology, has unique advantages over conventional treatment methods.<sup>16,19</sup> Ultrasound operates at ambient temperature and pressure conditions. Moreover, ultrasound technology has been considered as an environmental protection method, as it produces no secondary pollutants.<sup>16,20</sup> Ultrasound is no need for extra chemicals; therefore, the operating cost will be reduced. This technique is not only appropriate from the economic viewpoint, but it is also easy to implement. Furthermore, it has lesser safety issues and faster remediation rate compared to other existing

technologies. In addition, sonolysis is not affected by the biodegradability and toxicity of the compounds.<sup>14</sup> On the other hand, the sonochemical process also has the advantage of being compatible and attachable to other biological or physical processes.<sup>21</sup>

A goal of this review was to judge the potential use of ultrasound in the removal of pesticides from aqueous solutions and evaluate the applicability of ultrasound process in water treatment. The first part describes an overview of ultrasound, induced phenomena, mechanisms of ultrasound in degradation of pesticides. Then, a detailed analysis of the existing literature related in the specific area of ultrasonic treatment of pesticide-containing water has also been presented. In the next part, the combinatorial treatment schemes based on the use of sonication have been examined which can further intensify the degradation process and led to an economical operation even at commercial scale operations. Finally, the future perspectives of ultrasound applications in removal of pesticides will be discussed as well. This paper is aimed at providing the fundamental background information and outline research directions to those who are involved or about to be involved in this field.

## 2. Theory of ultrasound

Ultrasound is an acoustic wave with frequencies above the realms of human hearing (*i.e.*, 20 kHz).<sup>22</sup> The propagation of

ultrasonic waves through the liquid medium, cause acoustic cavitation phenomenon which consists of formation, growth during the rarefaction cycle (negative pressure period) and transient collapse of the bubble during the compression phase (positive pressure period).<sup>23</sup> The acoustic cavitation can be classified into stable and transient cavitation. At high frequencies, stable cavitation is dominant, where bubbles only oscillate and do not implode. In this type of cavitation, the motion of cavitation bubbles lead to micro-streaming which can provide micro agitation in their surrounding area. On the other hand, low frequency ultrasound primarily generates transient cavitation bubbles which live for only a few acoustic cycles and grow rapidly over a period of a few cycles to a critical size until implode very violently.<sup>24</sup> Fig. 2a illustrates schematic of stable and transient cavitation.

The collapse of transient bubble causes some hydrodynamic phenomena such as shock waves, shear forces and high-velocity micro-jets can easily disruption of cell walls or breakdown of polymer chains.<sup>25–27</sup> In addition, transient collapse of cavitation bubbles creates a high local temperature (up to 5000 K)

and pressure (up to 100 MPa) which lead to breakdown and pyrolytic decomposition of volatile substance and organic pollutants inside the cavitation bubbles.<sup>24,28</sup> Inside the cavitation bubble, water vapor and oxygen molecules undergo thermal dissociation to produce different highly reactive radicals ( $\text{H}^\bullet$ ,  $\text{HO}_2^\bullet$  and  $\text{HO}^\bullet$ ). These primary radicals of sonolysis react with dissolved organic and inorganic compounds leading to hydroxylation and oxidation reactions.<sup>29,30</sup> A simple mechanism for radical formation, during sonolysis of water is described below (reactions (1)–(5)).<sup>31</sup>



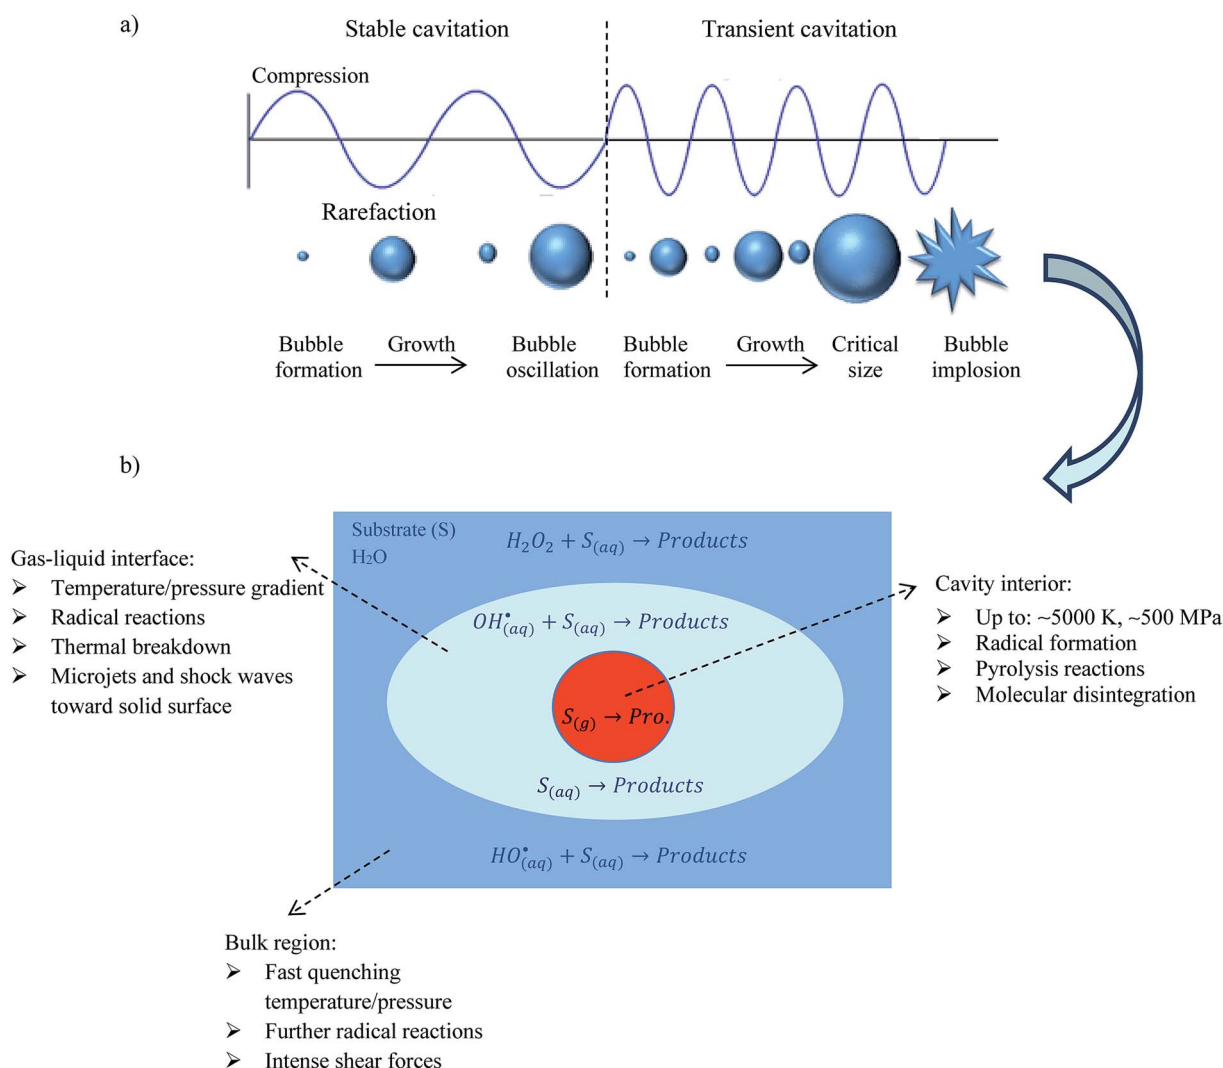


Fig. 2 Schematic representation of (a) cavitation bubbles displaying stable and transient cavitation and (b) reaction zones in cavitation process.



Hydroxyl radical is among the strongest oxidants that can react non-selectively with almost all types of organic and inorganic compounds. The trapped organic compounds in the bubble, either undergoes pyrolysis or reacts with the hydroxyl radical.<sup>32</sup> At the interface of liquid–gas bubbles, high temperature gradient leads to locally condense HO<sup>•</sup> and the degradation reaction occurs in the aqueous phase. Though the temperature in this region is lower than that in the bubble core, there is an adequately high temperature to thermal decomposition of the substrate. Moreover, hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>) can be generated by recombination hydroxyl radicals during sonolysis a diluted aqueous solution, which does not usually play a crucial role in oxidizing organic species and the amount may be too small to be significant (reactions (6) and (7)).<sup>33–36</sup>



Generally, there are two mechanisms responsible for the oxidation/degradation of pesticides by ultrasound which is decided on the basis of physical and chemical properties of the pesticides. The first mechanism is pyrolysis inside the cavitation bubbles which is expected to be the main reaction path for the degradation of hydrophobic or apolar and more volatile compounds. The second mechanism is the formation of hydroxyl radicals in the cavitation bubbles, which subsequently are thrown out in the bulk liquid on cavity collapse and oxidise the organic compounds which are hydrophilic or polar and non-volatile compounds.<sup>37</sup> In bulk liquid, the reactions are basically between the substrate and radicals that migrate from the interface. In the bulk phase, shear forces, turbulence and micro-streaming help radical reaction to proceed more quickly.<sup>38</sup> Most of the hydrophobic and volatile compounds react inside and at the interface of cavities, inside the cavitation bubble whereas hydrophilic and non-volatile compounds react at bulk water that contains insufficient OH radicals.<sup>39</sup> Fig. 2b depicts the schematic illustration of the sonochemical reaction zones.

### 3. Methods

Initially, an electronic literature search in the international databases (Google Scholar, Web of Science, Science Direct, Scopus and PubMed) was done to find the published studies and reports associated with the subject of this study from 2000 to 2019. Our systematic search was performed using English keywords with any possible combinations of keywords such as ultrasound, sonolysis, pesticide, removal, degradation, aqueous, advanced oxidation process, ozonation, Fenton, photo-Fenton, sono-photo-Fenton, photocatalysis, sonophotocatalysis additives, hydrogen peroxide, carbon tetrachloride and titanium dioxide. Besides, a manual search of the bibliographies of eligible papers was done to identify additional relevant publications which were missed by online searches.

The “AND” and “OR” operators were used to make our outcome of search inclusive and restrictive. Study selection procedure was including of title-reading, abstract-reading, and

full-text-reading steps. In total, 1265 documentaries were found on international databases, then a large number of search results were eliminated by reviewing their titles or abstracts, and only 115 documents were selected for evaluation. Papers that mention other pollutants in their titles were excluded from the study. The remaining papers were carefully reviewed and relevant papers were selected and 30 papers were finally analyzed. Fig. 3 illustrates the search process.

## 4. Results and discussion

### 4.1. Influence of the operational variables

Operation parameters such as reactor configurations, initial concentration of pesticide, ultrasonic frequency, intensity of irradiation, bulk solution temperature, operational pH and sonication time have been studied widely because of their significant effect on the performance of sonochemical processes for the degradation of pesticides. Therefore, these parameters need to be optimized for achieving the best removal efficiency and the lowest economic costs. In this part, some optimization rules for these parameters are systematically outlined based on the exhaustive analysis of the existing literature. Information on some studies conducted in recent years for the degradation of pesticides using ultrasound is presented in Table 1.

**4.1.1. Influence of the reactor configurations.** In general, four types of laboratory ultrasonic apparatus are widely used, namely, whistle, bath, probe (horn) and cup-horn system. The whistle reactors are employed for polymerization, emulsification, and phase transfer reactions. The cheapest and most readily available laboratory ultrasonic device for carrying out sonochemical reactions is the ultrasonic bath which is a low-intensity device. However, maintaining the temperature is not easy in this system and also the ultrasonic power is limited by attenuation by the water, bath size, wall thickness and bath position. Owing to the above reasons, the ultrasonic bath is usually utilized for cleaning operations or the removal of dissolved gases. An ultrasonic horn or probe system directly dipped in the solution and result in intense cavitation. The ultrasonic horn is characterized by providing much more efficient power control; however, the accurate temperature control is crucial here. Furthermore, cavitation erosion of the horn tip leads to some chemical interference which will contaminate the system. The cup-horn system is a combination of bath and probe (horn) system which provides better temperature control and higher intensities without any contamination by the horn tip material.<sup>49–51</sup>

As shown in Table 2, Bagal and Gogate<sup>8</sup> studied sonochemical degradation of alachlor using ultrasonic horn (20 kHz, 100 W) and ultrasonic bath (20 kHz, 80 W) reactors. They observed a decrease in the extent of degradation in the case of bath reactor as compared to horn reactor which could be explained by the lower operating power density in the case of the bath as compared to horn.

In another study, Shriwas and Gogate<sup>52</sup> investigated degradation of methyl Parathion using ultrasonic horn and ultrasonic bath reactors with operating frequency of 20 kHz and





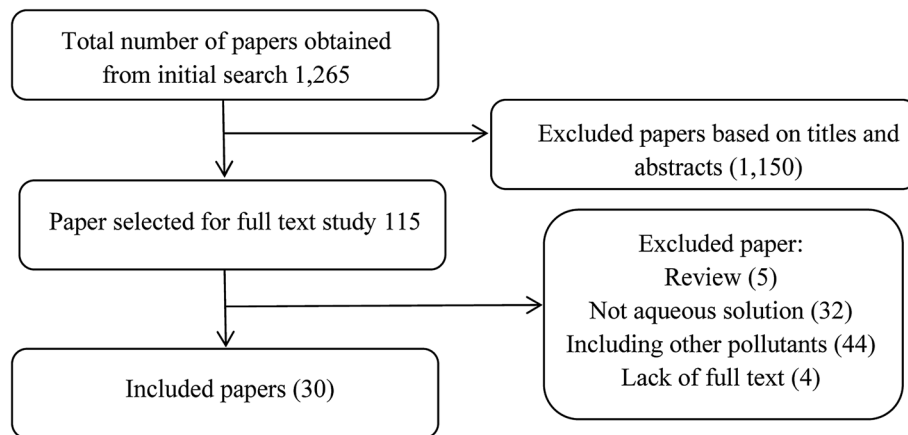


Fig. 3 Flow diagram of study identification.

maximum power rating of 270 W and 230 W, respectively. They reported that extents of degradation for only sonication were about 8% and 10.2% obtained on ultrasonic horn and ultrasonic bath, respectively, which can be attributed to lower operating power density in the case of the ultrasonic bath ( $72 \text{ W L}^{-1}$  on the basis of rated power input) as compared to ultrasonic horn ( $2700 \text{ W L}^{-1}$  on the basis of rated power input). In addition, they revealed that though the power dissipation levels are considerably higher in the case of horn reactor, similar level of enhancement in the extent of degradation was not observed. They explained their observations by the more uniform distribution of cavitation activity in the bath reactor owing to broader area of transducers as compared to horn reactor.

Most of the studies describing the degradation of pesticides used ultrasonic probe system due to its high intensity and optimum performance at different amplitudes. It should be noted here that though the treatment studies have been with horn or bath system, the scale up prospects of these ultrasonic reactors are quite poor. Indeed, in spite of extensive studies on laboratory scale and immense application potential for degradation of pesticides, not many researches are available in the open literature related to pesticide degradation on an industrial scale. The main drawback of horn-type ultrasonic system is high-energy consumption and the limited cavitation zone around the transducer, which is less efficient for the treatment of large volumes of liquid.<sup>49</sup> Changing the configuration or geometry of the sonochemical reactor is one of the efficient ways for decreasing the energy consumption. It is recommended to ensure power dissipation over broader area using multiple transducers to get higher intensities of cavitation. Multiple transducer irradiations (with or without multiple frequencies) also lead to remarkably higher cavitation activity as compared to single transducer operation and thus these novel configurations of ultrasonic equipment show good prospects for scale up.

**4.1.2. Influence of the ultrasound frequency.** As shown in Table 1, many studies have evaluated the effect of ultrasound frequency on the sonolytic degradation of pesticides. The results show that ultrasound frequency has significant effect on

the removal of pesticides. The influence of frequency on degradation of pesticides can be attributed to the fact that rates of  $\text{HO}^\bullet$  radical formation depends on the frequency of ultrasound. In general, when the ultrasound frequency increases, the bubbles lifetime becomes shorter and the size of cavitation bubbles reduces. In other words, the cavitation threshold improves with increasing frequency, and therefore cavitation intensity reduces and leads to diminish the maximum temperature attained in the collapse. All these factors lead to a lower yield of  $\text{HO}^\bullet$  generation as the frequency is increased.<sup>53,54</sup> On the other hand, the higher frequency enhances mass transfer by acoustic streaming, turbulence and other physical effects and leads to the faster release of active radicals into the surrounding medium and bulk reactive solute toward the interface of cavitation bubble. For hydrophobic compound the optimal frequency degradation is not only determined by the optimal hydroxyl radicals yield but also the efficient mass transfer of molecule from the liquid phase to the gas/solution interface of cavitation bubbles.<sup>55</sup> Therefore, the ultrasound frequency effects are dependent on the reaction localization and nature of the molecules. Overall, in terms of ultrasonic frequency, low frequency such as 20 kHz is recommended which will give dominant physical effects of cavitation phenomena so as to promote the mass transfer rates.

Agarwal *et al.*<sup>16</sup> studied the effect of ultrasound frequency (35 and 130 kHz) on sonolysis of chlorpyrifos in aqueous solutions and they observed that pesticide removal increases with increasing of the ultrasound frequency.

Yao *et al.*<sup>48</sup> also investigated the degradation of parathion in aqueous solutions at different frequencies (200, 400, 600, and 800 kHz). The results showed that parathion degradation reached a maximum at 600 kHz. They explained that the optimal frequency for degradation parathion, as a nonvolatile and hydrophobic compound, is determined by both the optimal hydroxyl radicals yield and the efficient mass transfer of the molecule from the liquid phase to the interfacial region.

**4.1.3. Influence of the acoustic power.** Based on the studies reviewed, acoustic power plays an important role in sonochemical degradation of pesticides. The results clearly show that





Table 1 Sonochemical degradation of pesticides

No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other experimental cond.	Degradation intermediates/products	Results	Ref.
1	Chlorpyrifos, $M(\text{g mol}^{-1}) = 350.57$ , $\log P$ : 4.96		2–3 ppm	A probe system: 20 kHz and 0–1.2 kW	Temperature 15, 25 and 35 °C; pH 5–8; sonication time 1–120 min	Chlorpyrifos oxon and TCP	<ul style="list-style-type: none"> <li>• Optimum degradation occurred at 900 W, 35 °C and pH 7</li> <li>• Hydrolysis and oxidation are the degradation pathway of chlorpyrifos</li> <li>• The toxicity decreased for chlorpyrifos solution after ultrasonic irradiation due to chlorpyrifos oxon formation</li> </ul>	40
2	Chlorpyrifos		1 and 2 ppm	An ultrasonic bath: 35 and 130 kHz, 300 and 500 W	Temperature 25 °C; pH 4, 7 and 9; sonication time 20, 40 and 60 min	Not reported	<ul style="list-style-type: none"> <li>• 98.96% degradation was occurred under optimal conditions (pH 9, pesticide concentration 1 ppm, frequency 130 kHz, ultrasonic 500 W and sonication time 20 min)</li> <li>• The polynomial equations satisfactorily described the behavior of ultrasonic treatment</li> <li>• According to the absolute effects of the independent variables, the initial concentration of chlorpyrifos had more importance over other variables for the derived first-order polynomial models</li> </ul>	16
3	DDT, $M(\text{g mol}^{-1}) = 354.5$ , $\text{p}K_a = \text{n.a.}$ , $\log P$ : 6.91		8 ppm	A probe system: 1.6 MHz and 20 W (150 W L <sup>-1</sup> )	pH 7.0; sonication time 90 min	DDD (C <sub>14</sub> H <sub>10</sub> Cl <sub>3</sub> ), DDE (C <sub>14</sub> H <sub>8</sub> Cl <sub>4</sub> ) and DDMU (C <sub>14</sub> H <sub>9</sub> Cl <sub>3</sub> )	<ul style="list-style-type: none"> <li>• Low power high frequency ultrasound with operating costs much lower than low frequency is effective for the degradation of non-polar pollutant DDT</li> <li>• 90% degradation occurred by ultrasound after 90 min</li> <li>• Combination of ultrasound and FeSO<sub>4</sub> increased degradation rate of DDT</li> </ul>	20




Table 1 (Contd.)

No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other experimental cond.	Degradation intermediates/products	Results	Ref.
4	Diazinon, $M$ ( $\text{g mol}^{-1}$ ) = 304.4, $\text{p}K_a$ = 2.6, $\log P$ : 3.69		7.82, 32.52 and 65.19 $\mu\text{M}$	A probe system: 25 kHz and 0–650 W	Temperature 15 °C; sonication time 15–120 min	IMP, diazoxon, hydroxydiazinon, 2-hydroxydiazinon	<ul style="list-style-type: none"> <li>Pseudo-first-order kinetics; 90% degradation occurred by ultrasound after 2 h, ultrasonic intensity 500 W at initial concentration of 7.82 <math>\mu\text{mol L}^{-1}</math></li> </ul>	41
5	Diazinon		800, 1200, and 1800 ppm	1.7 MHz and 9.5 W	Temperature 20 °C; sonication time 600 s; solution volumes 40, 50, and 60 mL	Not reported	<ul style="list-style-type: none"> <li>Pseudo-first-order kinetics; 70% degradation occurred for 1200 ppm as initial concentration and 50 ml solution volume</li> </ul>	42
6	Diazinon		2–3 ppm	A probe system: 20 kHz and 0–1.2 kW	Temperature 15, 25 and 35 °C; pH 5–8; sonication time 1–120 min	IMP, diazoxon, hydroxydiazinon, 2-hydroxydiazinon, diazinon methyl ketone	<ul style="list-style-type: none"> <li>Optimum degradation occurred at 900 W, 35 °C and pH 7</li> <li>Hydrolysis, hydroxylation, dehydration and oxidation are the degradation pathway of diazinon</li> <li>The toxicity of diazinon solution declined after ultrasonic irradiation</li> </ul>	40
7	Dicofol, $M$ ( $\text{g mol}^{-1}$ ) = 370.5, $\text{p}K_a$ = n.a., $\log P$ : 4.3		5.4 to 54 $\mu\text{M}$	A probe system: 20 kHz and 150–450 W	Temperature 10–40 °C; pH 3–7; sonication time 60 min	3,3'-Dichlorobenzophenone, 4-chlorobenzophenone and benzophenone	<ul style="list-style-type: none"> <li>Pseudo-first-order kinetic model</li> <li>The optimum condition: acoustic power of 375 W, temperature of 20 °C, pH of 3 and an initial dicofol concentration of 27 <math>\mu\text{M}</math></li> <li>Addition of <math>\text{H}_2\text{O}_2</math> (5000 <math>\mu\text{M}</math>) during the sonication led to a slight increase in degradation rate</li> <li>Thermal decomposition along with radical attack at bubble–vapor interface is the degradation pathway of dicofol</li> </ul>	43



Table 1 (Contd.)



No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other experimental cond.	Degradation intermediates/products	Results	Ref.
8	Dichlorvos, $M$ ( $\text{g mol}^{-1}$ ) = 221, $\text{p}K_a$ = n.a, $\log P$ : 1.43		20 ppm	A probe system: 20 kHz and 0–270 W	Temperature 15–45 °C; pH 2–8; sonication time 120 min	Not reported	<ul style="list-style-type: none"> <li>Maximum extent of degradation of dichlorvos as obtained at pH of 3 and temperature of 25 °C</li> <li><math>\text{H}_2\text{O}_2</math> and <math>\text{CCl}_4</math> enhanced the reaction by producing of the oxidizing species</li> <li>The free radical attack is the controlling mechanism for the degradation of dichlorvos under sonication</li> </ul>	44
9	Dichlorvos		$5.0 \times 10^{-4}$ M	A probe system: 500 kHz and 86–161 W	Temperature 20 °C; pH 3.3; sonication time 140 min	Dimethyl phosphate, formate, carbon dioxide, chloride and phosphate	<ul style="list-style-type: none"> <li>Increasing ultrasonic power from 86 to 161 W led to the enhancement of the rate constant from <math>0.018 \pm 0.001 \text{ min}^{-1}</math> to <math>0.037 \pm 0.002 \text{ min}^{-1}</math></li> <li>Mixture of the argon and oxygen gases (<math>\text{Ar}/\text{O}_2</math>: 60/40% v/v) with flow rate flow rate 100 mL <math>\text{min}^{-1}</math> during sonication at a power of 161 W resulted in the highest rate constant (<math>0.079 \pm 0.005 \text{ min}^{-1}</math>)</li> </ul>	45
10	Malathion, $M$ ( $\text{g mol}^{-1}$ ) = 330.4, $\text{p}K_a$ = n.a, $\log P$ : 2.75		2, 4 and 8 ppm	A batch reactor: 130 kHz and 300 W, 400 W, 500 W	Temperature 18–20 °C; pH 6.8–7; sonication time 20–120 min	Not reported	<ul style="list-style-type: none"> <li>The extent of malathion degradation decreased by increase of initial malathion concentration and decrease of ultrasonic power</li> <li>The results showed that sonication time and temperature had no significant effect on degradation of malathion (<math>p &gt; 0.05</math>)</li> <li>Radial attack at bubble–vapor interphase is the dominant pathway decomposition of malathion insecticide by ultrasound</li> </ul>	46





Table 1 (Contd.)


No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other experimental cond.	Degradation intermediates/products	Results	Ref.
11	Organochlorine pesticides (OCs)		20 and 40 $\mu\text{g L}^{-1}$	A probe system: 20 kHz and 200 W	Temperature 20 °C; pH 3, 7 and 11; treatment time 5–60 min	Not reported	<ul style="list-style-type: none"> <li>• 2.3% degradation was occurred by ultrasound under follows condition: 40 <math>\mu\text{g L}^{-1}</math> concentration for each pesticide, pH 7 and sonication time 60 min</li> <li>• Combined ultrasound/<math>\text{H}_2\text{O}_2</math> process was less effective than using ultrasonic waves alone which reflected inappropriacy of the <math>\text{H}_2\text{O}_2</math> dose, pH or time</li> <li>• The decomposition mechanism of pesticide under ultrasound can be described by <math>\text{OH}^\bullet</math> radical reaction with pesticide by double-bond addition or hydrogen abstraction</li> </ul>	47
12	Parathion, $M (\text{g mol}^{-1}) = 291.3$ , $\text{p}K_a = \text{n.a.}$ , $\log P: 3.83$		0.8, 2.9 and 5.2 $\mu\text{M}$	200, 400, 600 and 800 kHz; 17.4, 37.8 and 55.2 W	Temperature 25 °C; pH 7.0; sonication time 30 min	4-Nitrophenol, 2,4-dinitrophenol and paraoxon	<ul style="list-style-type: none"> <li>• Pseudo-first-order kinetics</li> <li>• The optimal frequency for parathion degradation was 600 kHz</li> <li>• The extent of parathion degradation rate of parathion decreased with increasing initial concentration and decreasing ultrasonic power. The <math>\text{N}_2</math> in air takes part in the parathion degradation through the formation of <math>\cdot\text{NO}_2</math> during sonication</li> <li>• The gas–solution interfacial regions are predominately the reaction zones for sonochemical degradation of parathion. The gas/liquid heterogeneous reaction obeys pseudo-first-order-kinetic model based on Langmuir–Hinshelwood model</li> </ul>	48



Table 1 (Contd.)


No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other experimental cond.	Degradation intermediates/products	Results	Ref.
13	Pentachlorophenol, $M$ ( $\text{g mol}^{-1}$ ) = 266.3, $\text{p}K_a = 4.73$ , $\log P$ : 3.32		20 and 60 $\mu\text{M}$	A probe system: 20 kHz and 66.54 W; a tube resonator: 20 kHz and 466 W; an orthoreactor: 500 kHz and 48.3 W	Temperature 30 °C; pH 7.3; sonication time 5–150 min	Tetrachloro- <i>o</i> -benzoquinone ( <i>o</i> -chloranil tetrachlorocatechol (TCC), oxalate, and chloride	<ul style="list-style-type: none"> <li>Pseudo-first-order kinetics</li> <li>Lower frequency and PCP concentration resulted in more rapid rates</li> </ul>	30
14	Pentachlorophenol		0.1 mM	Dual-frequency (20 kHz/40 kHz, 22.73 W; 20 kHz/530 kHz, 22.97 W; 20 kHz/800 kHz, 20.39 W; 20 kHz/1040 kHz, 18.32 W)	Temperature 30 °C; natural pH; sonication time 5–120 min	Not reported	<ul style="list-style-type: none"> <li>Pseudo-first-order kinetics</li> <li>Rate of pentachlorophenol degradation at dual-frequency irradiation is the highest compared to single low frequency</li> <li>Order of dual-frequency systems for PCP degradation at 20 kHz is as follows: 530 kHz &gt; 800 kHz &gt; 40 kHz &gt; 1040 kHz</li> </ul>	18



Table 2 Synergistic effect of ultrasound with other degradation technologies

No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other technologies	Other experimental cond.	Degradation intermediates/products	Results	Ref.
1	Acephate, $M$ (g mol <sup>-1</sup> ) = 183.2, $pK_a$ = 8.35, $\log P$ : -0.85		100 ppm	160 kHz and 0–50 W	Ozone treatment, (O <sub>3</sub> flow rate 2 L min <sup>-1</sup> )	Temperature 25 °C; pH 7; sonication time 60 min	Primary products (CH <sub>3</sub> O(CH <sub>3</sub> S)P(O)NH <sub>2</sub> and CH <sub>3</sub> COOH), intermediate products (CH <sub>3</sub> O(CH <sub>3</sub> S)P(O)OH, CH <sub>3</sub> O(HO)P(O)OH, and CH <sub>3</sub> S(O) <sub>2</sub> SCH <sub>3</sub> ), and final products (NH <sub>4</sub> <sup>+</sup> , NO <sub>3</sub> <sup>-</sup> , QUOTE, SO <sub>4</sub> <sup>2-</sup> , CO <sub>2</sub> , H <sub>2</sub> O, and H <sub>3</sub> PO <sub>4</sub> )	<ul style="list-style-type: none"> <li>• 22.9% and 60.6% of the acephate was removed by ultrasonic irradiation and ozonation, respectively</li> <li>• The degradation efficiency of acephate enhances to 87.6% by combined ultrasonic/ozonation process</li> <li>• The combined method led to thoroughly acephate degradation and most final products were innocuous to the environment</li> </ul>	72
2	Alachlor, $M$ (g mol <sup>-1</sup> ) = 269.8, $pK_a$ = 0.62, $\log P$ : 3.09		20 ppm	An ultrasonic horn: 20 kHz and 0–100 W An ultrasonic bath: 400 kHz and 80 W	Fenton process, additives (hydrogen peroxide and carbon tetrachloride)	Temperature 28 °C; pH 2–11; sonication time 120 min	Major byproducts: 2-hydroxy-2', 6'-diethyl-N-methyl acetanilide and 2-chloro-2', 6'-diethyl-N-methyl acetanilide	<ul style="list-style-type: none"> <li>• Only 3.5% degradation was obtained using ultrasonic bath after 60 min</li> <li>• 86.4% degradation of alachlor was achieved by ultrasonic horn at initial pH 3 after 120 min</li> <li>• Nearly 98% degradation was obtained using US/H<sub>2</sub>O<sub>2</sub> (0.07 g L<sup>-1</sup>) after 120 min</li> <li>• 98% degradation was obtained using US/CCl<sub>4</sub> (1 g L<sup>-1</sup>) after 90 min</li> <li>• Complete degradation was obtained after 50 min using US/FeSO<sub>4</sub> : H<sub>2</sub>O<sub>2</sub> (0.035 g L<sup>-1</sup> : 0.07 g L<sup>-1</sup>)</li> <li>• At the 1 g L<sup>-1</sup> loading of CCl<sub>4</sub>, 98% degradation was achieved after 90 min sonication</li> </ul>	8



Table 2 (Contd.)

No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other technologies	Other experimental cond.	Degradation intermediates/products	Results	Ref.
3	Atrazine, $M$ (g mol <sup>-1</sup> ) = 215.7, $pK_a$ = 4.14, 10.7, log $P$ : -0.97		5 ppm	An ultrasonic generator: 20 kHz, 0–2000 W	<ul style="list-style-type: none"> <li>Ultraviolet irradiation (UV lamp 254 nm)</li> <li>Ozonation (two 300 W O<sub>3</sub> generators)</li> </ul>	Temperature 20 °C; pH 12; treatment time 4 h	Not reported	<ul style="list-style-type: none"> <li>97.68% degradation was achieved under the conditions of 142.5 W ultrasound power, 75 W UV power and 10.75 g h<sup>-1</sup> O<sub>3</sub> flow rate</li> <li>The degradation of Atrazine followed the second-order polynomial model</li> <li>The presence of other organic compounds in the matrix approximately avoided the degradation of atrazine by consuming radicals</li> </ul>	73
4	Carbofuran, $M$ (g mol <sup>-1</sup> ) = 221.2, $pK_a$ = n.a., log $P$ : 1.8		10–200 ppm	A probe system: 20 kHz and 300 W	Fenton process (H <sub>2</sub> O <sub>2</sub> : 0–500 mg L <sup>-1</sup> , Fe <sup>2+</sup> : 0–0.306 mM)	Temperature 25 °C; pH 7.3; treatment time 60 min	Not reported	<ul style="list-style-type: none"> <li>Carbofuran degradation the enhanced from 22% to 44% with increasing H<sub>2</sub>O<sub>2</sub> dosages of 0–200 mg L<sup>-1</sup> within 120 min</li> <li>Almost 99% of the carbofuran was degraded by combined ultrasound/Fenton process after 30 min for the initial carbofuran concentration of 20 mg L<sup>-1</sup> and Fe<sup>2+</sup> and H<sub>2</sub>O<sub>2</sub> dosages of 20 mg L<sup>-1</sup> and 100 mg L<sup>-1</sup>, respectively, all at pH 3</li> <li>The degradation of carbofuran followed the first-order kinetics model</li> </ul>	74



Table 2 (Contd.)


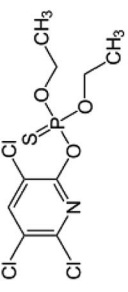
No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other technologies	Other experimental cond.	Degradation intermediates/products	Results	Ref.
5	Chlorpyrifos, $M(\text{g mol}^{-1}) = 350.57$ , $\log P: 4.96$		900 ppm	An ultrasonic generator: 40 kHz, 40–320 W	Electrooxidation process (voltage 5–30 V, $\text{Na}_2\text{SO}_4$ concentration $0.5\text{--}3 \text{ g L}^{-1}$ )	Temperature $15\text{--}35^\circ\text{C}$ ; treatment time 60 min	Not reported	<ul style="list-style-type: none"> <li>• The optimum conditions for degradation were: electrolyte concentration of <math>2 \text{ mg L}^{-1}</math>, voltage of 20 V, ultrasonic power of 200 W and temperature <math>20^\circ\text{C}</math>, which led to 93.3% and 72.8% of degradation in US-EC system and EC system</li> <li>• The chlorpyrifos degradation followed pseudo-first-order kinetics</li> <li>• Ultrasound in the US-EC system gradually improve the amount of <math>\cdot\text{OH}</math> production compared with the EC system</li> </ul>	71
6	Dichlorvos, $M(\text{g mol}^{-1}) = 221$ , $\text{p}K_a = \text{n.a.}$ , $\log P: 1.43$		20 ppm	An ultrasonic horn: 36 kHz, 0–150 W	Photocatalysis, ozone and Fenton process	Temperature $20^\circ\text{C}$ ; pH 3; sonication time 120 min	Not reported	<ul style="list-style-type: none"> <li>• Only 6.4% and 20% degradation of dichlorvos was achieved after 120 min of US and <math>\text{US}/\text{H}_2\text{O}_2</math> (<math>0.07 \text{ g L}^{-1}</math>)</li> <li>• 3% and 78.4% degradation was obtained by US/<math>\text{TiO}_2</math> (<math>0.1 \text{ g L}^{-1}</math>) and US/<math>\text{TiO}_2</math>/solar (<math>0.1 \text{ g L}^{-1}</math>) in 2 h treatment</li> <li>• Combination of US/Fenton's reagent (<math>80 \text{ mg L}^{-1}</math>; <math>80 \text{ mg L}^{-1}</math>) increased the extent of degradation 81.2%</li> <li>• Complete degradation was obtained in 30 min of reaction time by using combination of ozone (<math>1.95 \text{ g h}^{-1}</math>) and ultrasound</li> </ul>	75





Table 2 (Contd.)

No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other technologies	Other experimental cond.	Degradation intermediates/products	Results	Ref.
7	Diazinon, $M(g\ mol^{-1}) = 304.4$ , $pK_a = 2.6$ , $\log P: 3.69$		50 ppm	A probe system: 20 kHz and 100 W	Fenton process ( $H_2O_2$ : 0–4.41 mM, $Fe^{2+}$ : 0–0.306 mM)	Temperature 15–55 °C; pH 7.3; treatment time 60 min	Diethyl phosphonate, 2-isopropyl-6-methyl-4-pyrimidinol, diazoxon and hydroxy-diazin	<ul style="list-style-type: none"> <li>The degradation efficiencies subjected to US, US/<math>Fe^{2+}</math> and US/<math>H_2O_2</math> were 22, 25 and 26%, respectively</li> <li>98% degradation occurred by sono-Fenton under optimal condition: 20 ppm <math>Fe^{2+}</math>, 150 ppm, <math>H_2O_2</math>, 25 °C and pH 3</li> <li><math>OH^\cdot</math> attack, hydroxylation and hydrolysis were the major degradation pathway of diazinon</li> </ul>	76
8	Diazinon		20–80 ppm	An ultrasonic bath: 200–400 W $L^{-1}$	Catalyst (catalyzed persulfate (5–10 mmol $L^{-1}$ ) with $Fe_3O_4@MOF-2$ nanocomposite: $Fe_3O_4@MOF-2$ (0.4–1 g $L^{-1}$ ))	Temperature 20 °C; pH 3–12; treatment time 120 min	2-Isopropyl-6-methyl-pyrimidin-4-ol, 2-(thiophosphoryl)-acrylic acid, (1 <i>E</i> ,2 <i>E</i> )-3-((dimethoxyphosphoryl)-oxy)- <i>N</i> -methylbut-2-enimide acid, 3,7-dimethyloct-6-enal, (methyl-amino)methyl dihydrogen phosphite, ( <i>E</i> )-2,6-dimethyloct-2,6-diene and propionic acid	<ul style="list-style-type: none"> <li>Degradation of diazinon enhanced by increasing the <math>Fe_3O_4@MOF-2</math> dosage and the US bath power, along with reducing the diazinon concentration</li> <li>100% degradation was achieved by <math>Fe_3O_4@MOF-2</math>/US/PS under follows condition: [diazinon]<sub>0</sub> = 30 mg <math>L^{-1}</math>, [PS] = 10 mmol <math>L^{-1}</math>, <math>Fe_3O_4@MOF-2</math> = 0.7 g <math>L^{-1}</math>, pH = 3</li> </ul>	15

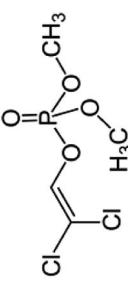

Table 2 (Contd.)

No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other technologies	Other experimental cond.	Degradation intermediates/products	Results	Ref.
9	Dimethoate, $M$ (g mol <sup>-1</sup> ) = 229.3, $pK_a$ = n.a., log $P$ : 0.704		20 ppm	A probe system: 40 kHz and 0–250 W	Ozonation (0.1–0.55 0.41 m <sup>3</sup> h <sup>-1</sup> )	Temperature 25 °C; pH 7.0; sonication time 5–30 min	(CH <sub>3</sub> O) <sub>2</sub> P(S)SCH <sub>3</sub>	<ul style="list-style-type: none"> <li>• Pseudo-first-order kinetics</li> <li>• US, O<sub>3</sub> and combined US/O<sub>3</sub> process resulted in 14.5%, 20.1% and 90.8% dimethoate degradation, respectively, under the optimal conditions:</li> <li>treatment time 4 h, O<sub>3</sub> flow rate of 0.41 m<sup>3</sup> h<sup>-1</sup>, ultrasonic power of 4.64 W cm<sup>-2</sup>, pH of 10.0, temperature of 25 °C, and initial dimethoate concentration of 20 mg L<sup>-1</sup></li> </ul>	77
10	Fenitrothion, $M$ (g mol <sup>-1</sup> ) = 277.2, $pK_a$ = n.a., log $P$ : 3.32		10 ppm	An ultrasonic generator: 20 kHz, 150 W	Photo-Fenton process: (light intensity: 1.0 mW cm <sup>-2</sup> Fe <sup>3+</sup> : 0–1 × 10 <sup>-3</sup> oxalate: 0–5 × 10 <sup>-3</sup> M)	Temperature 25 °C; pH 6; treatment time 30 min	Nitrite and sulfate ions	<ul style="list-style-type: none"> <li>• Almost 100% degradation was obtained by US/ferrioxalate/UV system under optimum conditions: pH 6, 5 × 10<sup>-4</sup> M Fe(III), 5 × 10<sup>-3</sup> M oxalate</li> </ul>	78
11	Linuron, $M$ (g mol <sup>-1</sup> ) = 249.1, $pK_a$ = n.a., log $P$ : 3		10 ppm	An ultrasonic generator: 200 kHz, 100 W	Photo-Fenton process (Fe(II): 0–5 × 10 <sup>-4</sup> mol L <sup>-1</sup> )	Temperature 25 °C; treatment time 60 min; pH 2.5–5.5	Chloride, nitrite and nitrate ions	<ul style="list-style-type: none"> <li>• Complete decomposition of linuron was achieved by US/Fe(II)/UV system after 20 min under follows conditions: Fe(II) concentration of 1.2 × 10<sup>-4</sup> mol L<sup>-1</sup> and pH 3.0; while only 79.3% decomposition of linuron was obtained by sonolysis</li> <li>• First-order constant for degradation of linuron by ultrasound/Fe(II)/UV process</li> </ul>	79



Table 2 (Contd.)

No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other technologies	Other experimental cond.	Degradation intermediates/products	Results	Ref.
12	Metazachlor, $M(\text{g mol}^{-1}) = 277.75$ , $\text{p}K_{\text{a}} = \text{n.a.}$ , $\log P: 2.49$			An ultrasonic generator: 20 kHz, 100 W	<ul style="list-style-type: none"> <li>• Oxygen (oxygen flow rate of 2.0 L min<sup>-1</sup>)</li> <li>• Fenton-like oxidation process (initial concentration of ferric oxyhydroxide of 50 mg L<sup>-1</sup>)</li> </ul>	Temperature 22 °C; treatment time 120 min; pH 3	2-Chloro-N-(2-methylphenyl)-N-[(1H-pyrazol-1-yl)methyl]-acetamide; 2-chloro-N-[2-(hydroxymethyl)-phenyl]-N-[(1H-pyrazol-1-yl)methyl]-acetamide; 2-chloro-N-(2-formyl-6-methylphenyl)-N-methylacetamide; 2-chloro-N-(2,6-dimethylphenyl)-acetamide; 2-chloro-N-(2-formylphenyl)-6-methylphenylacetamide; N-(2-chloroacetyl)-N-(2-methylphenyl)formamide	<p>(0.17 min<sup>-1</sup>) was about 2 times greater than that in individual ultrasonic process (0.08 min<sup>-1</sup>)</p> <ul style="list-style-type: none"> <li>• The metazachlor decomposition by sonolysis fitted in pseudo-first order kinetics</li> <li>• First-order constant for degradation of metazachlor enhanced from 1.11 × 10<sup>-2</sup> min<sup>-1</sup> for conventional sonolysis to 1.79 × 10<sup>-2</sup> and 2.88 × 10<sup>-2</sup> min<sup>-1</sup> for O<sub>2</sub>-saturated and Fe<sub>2</sub>O<sub>3</sub>-added solutions, respectively</li> <li>• Almost 97% degradation was achieved by sonolysis in the presence of ferric oxyhydroxide</li> </ul>	80
13	Methomyl, $M(\text{g mol}^{-1}) = 162.2$ , $\text{p}K_{\text{a}} = \text{n.a.}$ , $\log P: 1.24$		25 ppm	An ultrasonic generator: 20 kHz, 500 W	<ul style="list-style-type: none"> <li>• H<sub>2</sub>O<sub>2</sub> (1 : 10, 1 : 20, 1 : 30, 1 : 40 and 1 : 50)</li> <li>• Fenton (Fe<sup>2+</sup> : H<sub>2</sub>O<sub>2</sub> 1 : 50, 1 : 40 and 1 : 30)</li> <li>• Photo-Fenton process (two UV lamps of 8 W)</li> </ul>	Temperature 28 °C; pH 2.5–7.5; treatment time 60 min	Not reported	<ul style="list-style-type: none"> <li>• 28.57% degradation was achieved by sonolysis after 72 min at the optimal pH of 2.5 and power density of 0.155 W mL<sup>-1</sup></li> <li>• Combination of ultrasound with H<sub>2</sub>O<sub>2</sub>, Fenton and photo-Fenton process led to complete degradation of methomyl after 27 min, 18 min and 9 min, respectively</li> </ul>	59



Table 2 (Contd.)





No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other technologies	Other experimental cond.	Degradation intermediates/products	Results	Ref.
14	Methyl parathion, <i>M</i> ( $\text{g mol}^{-1}$ ) = 263.2		20 ppm	A probe system: 20 kHz, 0–270 W A ultrasonic bath	Additives ( $\text{TiO}_2$ , $\text{CCl}_4$ and $\text{H}_2\text{O}_2$ ); Fenton process	Temperature 30 °C; pH 2.5–9.3; sonication time 60 min	Not reported	<ul style="list-style-type: none"> <li>10.2% degradation occurred by ultrasonic horn under acidic conditions at pH 2.5</li> <li>Presence of solid particles <math>\text{TiO}_2</math>, <math>\text{CCl}_4</math> and <math>\text{H}_2\text{O}_2</math> during sonication led to a considerable increase in the extent of parathion degradation</li> <li>The extent of degradation in the presence of Fenton chemistry in cavitation condition was 96% for 3 : 1 ratio of <math>\text{FeSO}_4</math> : <math>\text{H}_2\text{O}_2</math></li> </ul>	52
15	Monocrotophos, <i>M</i> ( $\text{g mol}^{-1}$ ) = 223.2, $\text{p}K_a = \text{n.a.}$ , log <i>P</i> : –0.2		0.01–0.12 mM	An ultrasonic generator: 213 kHz, 16–55 m W $\text{mL}^{-1}$	Photocatalysis and sonophotocatalysis ( $1 \text{ g L}^{-1}$ $\text{TiO}_2$ )	Temperature 25 °C; treatment time 60 min; pH 2.7	Dimethyl phosphate, dimethyl phosphonate, 3-hydroxy-2-butenamide and <i>N</i> -methyl-3-oxobutanamide	<ul style="list-style-type: none"> <li>Sonodegradation followed first order dependence with respect to MCP while <math>\text{TiO}_2</math> photocatalytic degradation showed a zero order dependence</li> <li>The presence of <math>\text{TiO}_2</math> during the sonolysis inhibited the degradation of monocrotophos due to the interference of phosphate ions formed as an intermediate</li> <li>About 15 fold enhancement was found for degradation rate in the presence of <math>\text{Fe}^{3+}</math> during photolysis</li> </ul>	81



Table 2 (Contd.)

No.	Pesticides	Chemical structure	Initial conc.	Sonochemical conditions	Other technologies	Other experimental cond.	Degradation intermediates/products	Results	Ref.
16	Simazine, $M$ (g mol <sup>-1</sup> ) = 201.7, $pK_a$ = 1.62, log $P$ : 2.3		5 ppm	An ultrasonic generator: 42 kHz	Photocatalysis	pH 6; treatment time 7 h	6-Chloro- $N,N'$ -diethyl-1,3,5-triazine-2,4-diamine; 1,1'-[(6-chloro-1,3,5-triazine-2,4-diyl)-diimino]-diethanol; 4,6-bis-(ethylamino)-1,3,5-triazine-2-ol; 6-chloro-1,3,5-triazine-2,4-diamine; $N'$ -(4-amino-6-hydroxy-1,3,5-triazin-2-yl)-acetamide; 4,6-diamino-1,3,5-triazine-2-ol; 1,3,5-triazine-2,4,6-triol	<ul style="list-style-type: none"> <li>The first order kinetics was observed for the degradation of Simazine</li> <li>The extent of the TOC removal by sonolysis, photocatalytic, sonophotocatalytic were 11%, 31%, 26% and 43%, respectively</li> </ul>	82
17	Triazophos, $M$ (g mol <sup>-1</sup> ) = 313.31, $pK_a$ = -0.15, log $P$ : 3.55		20 ppm	An ultrasonic generator: 40 kHz, 0–1500 W	$H_2O_2$ (triazophos: $H_2O_2$ 1 : 1 to 1 : 5); ozone (100–400 mg h <sup>-1</sup> ) and Fenton's reagent (triazophos : $FeSO_4 : H_2O_2$ 1 : 1 : 1 to 1 : 4 : 4)	Temperature 37 °C; treatment time 90 min; pH 2.3–7.3; flow rate 480 mL min <sup>-1</sup>	3Z-Undecene-5,7,10-trynoic acid; 1-(2-hydroxyethyl)-2-hydroxymethyl-5-nitroimidazole; acetylisoniazid; zolpidem metabolite I; dihydrodeoxy-ystrepto mycin; swietenine; croctin	<ul style="list-style-type: none"> <li>Combination of ultrasound with <math>H_2O_2</math>, ozone and Fenton's reagent result in 48.6%, 54.6% and 92.2% triazophos degradation, respectively</li> <li>The best reaction parameters were: ultrasonic power 203.6 W, flow rate 480 mL min<sup>-1</sup>, pH of 3.2, ratio of triazophos to <math>H_2O_2</math>, ozone flow rate 400 mg h<sup>-1</sup> and triazophos : <math>FeSO_4</math> : <math>H_2O_2</math> 1 : 4 : 4</li> <li>The triazophos degradation using ultrasound followed a first order reaction kinetics</li> </ul>	61



sonochemical reactivity increases proportionately with an increase in acoustic power. An increase in the acoustic power leads to an increase the rate and the number of cavitation bubbles and increase the HO<sup>•</sup> radicals concentration generated, consequently. In addition, as acoustic power increases, the size of individual bubbles increases which result in higher collapse temperature.<sup>45,56,57</sup> Furthermore, an increase in the mixing intensity results with an increase in power density because of the turbulence produced from cavitational effects.<sup>57</sup> However, further increase in the acoustic power from optimal value lead to lower degradation efficiency. At higher acoustic power of irradiation, the number of cavitation bubbles, close to the probe emitting surface enhances. The remarkable numbers of cavities coalesce to form larger cavities which leading to a less violent bubble implosion. As a consequence, less number of free radicals would be generated resulting into the lower the degradation rate of pesticide at very high ultrasonic power. Moreover, there exist large numbers of gas bubbles in the solution which scatter the sound waves to the vessel walls or back to the transducer and hence lower energy is dissipated in the solution.<sup>58</sup> In general, in terms of the acoustic power, typically optimum levels of ultrasonic power are recommended (value will depend on the pesticide under consideration as well as the sonochemical reactor configuration).

Numerous studies have evaluated the effect of acoustic power on the extent of pesticide degradations. Schramm and Hua<sup>45</sup> investigated the effect of acoustic power (86, 124 and 161 W) on the degradation of dichlorvos and also reported that increasing total acoustic power input from 86 to 161 W resulted in a change in the rate constant from  $0.018 \pm 0.001 \text{ min}^{-1}$  to  $0.037 \pm 0.002 \text{ min}^{-1}$ . They also attributed these results to the increasing the number of collapsing bubbles and concentration of free-radicals into the bubble-bulk interface region and aqueous solution with increasing acoustic power. The similar results were reported by Agarwal *et al.*,<sup>16</sup> Zhang *et al.*,<sup>41</sup> Golash and Gogate,<sup>44</sup> Schramm and Hua,<sup>45</sup> Shayeghi *et al.*<sup>46</sup> and Yao *et al.*<sup>48</sup>

Debabrata and Sivakumar<sup>43</sup> investigated the degradation of dicofol in aqueous media under sonolysis process. They observed that the degradation increases with a rise in acoustic power up to 375 W, beyond which a reduction in the degradation rate. These authors explained their results by an excessive heat production during sonication which led to a less violent bubble collapse.

**4.1.4. Influence of the solution pH.** On the basis of literature review, solution pH is another crucial factor in deciding the decomposition rate and hence the overall efficacy of the removal pesticide.

The initial pH of the solution controls the rate of formation of hydroxyl radicals during sonochemical degradation and hence affects the final extents of degradation. Acidic conditions inside the cavitation reactors lead the higher rate of formation as well as accumulation of hydroxyl radicals due to hampering of the recombination reaction to form H<sub>2</sub>O<sub>2</sub>. In other words, in higher pH solutions, a higher number of hydroxyl radicals recombine to form H<sub>2</sub>O<sub>2</sub> that leads to decrease in the quantum of the hydroxyl radicals available for the desired degradation reaction.<sup>8,9</sup> Furthermore, a high pH value may create more free

radical scavengers and results in the diminish in the concentration of HO<sup>•</sup>.<sup>44,59</sup> Thus, higher reactivity of hydroxyl radicals in the acidic medium than that at neutral and basic pH enhances degradation kinetics under the ultrasonic irradiation.

Sonochemical degradation kinetics at different pH is dependent on the state of the pollutant molecule, *i.e.*, whether the pollutant is present as ionic species or as a molecule. Hence, the physicochemical property, pK<sub>a</sub> value of ionizable organic pollutants plays a major role in determining the effect of pH on the rate of degradation. When the pH value is lower than pK<sub>a</sub> value, the molecular form of the pollutant is dominate and hence can accumulate at the bubble interface (gas-liquid film region) and more subjected to the highly reactive hydroxyl radicals.<sup>9,60,61</sup> Also, a fraction of this molecular form may even vaporizes into the cavitation bubbles (gaseous) for volatile compounds. Thus, when pH is less than the pK<sub>a</sub> the overall decomposition of pollutants at is considered to take place in both the gaseous and interfacial film regions by pyrolysis and free radical attack. At lower pH, the electrostatic attractive force between the charged of bubble-water interface and oppositely charged hydrophobic compounds resulted in faster degradation kinetics under acidic conditions.<sup>62-64</sup> If the pH is higher than the pK<sub>a</sub> value, the amount of ionic form predominates, which cannot vaporize into the cavitation bubbles. This ionic species is restricted only into the interfacial film region and react with the OH radicals.<sup>37,60</sup> Therefore, solution pH must be kept lower than the pK<sub>a</sub> for higher degradation of pesticides during sonication. For pollutants without ionizable groups little degradation variance was observed in tested pH range.<sup>63</sup>

Zhang *et al.*<sup>40</sup> monitored degradation of chlorpyrifos at different pH values and reported that the extent of chlorpyrifos degradation increased from 41% to 55% with an increase in its initial pH from 5 to 7; however, the degradation percentages declined, as the pH value increased from 7 to 8. They attributed the highest degradation efficiency at pH 7 to the occurrence of complex degradation pathway during sonolysis.

Similar findings of an enhancement in the extent of degradation of pesticides under acidic conditions during sonolysis are also reported in the literature. Golash and Gogate<sup>44</sup> investigated the effect of initial pH on sonochemical degradation of dichlorvos and reported that maximum extent of degradation was obtained at operating pH of 2. They attributed this to the improved formation of free radicals under acidic conditions and also higher oxidation potential of hydroxyl radical under acidic conditions. Debabrata and Sivakumar<sup>43</sup> have also reported that the maximum extent of degradation of dicofol is obtained at operating pH of 3. Similarly, Kida *et al.*<sup>47</sup> have also reported that the best efficiency of degradation of pesticides was obtained at operating pH of 3.

**4.1.5. Influence of the temperature.** Recent studies have demonstrated that the sonolytic degradation of pesticides is strongly temperature-dependent. The operating temperature has a remarkable impact on mass transfer coefficients and kinetic parameters. On one hand, increasing temperature causes reduction in the viscosity and surface tension of the solution and thereby diminish cavitation threshold, so that cavitation bubbles are more easily produced. On the other hand, the



cavitation bubbles generated by ultrasound may be so readily collapsed owing to a smaller pressure difference between inside and outside of bubbles at extreme temperature. In other words, at high operating temperature, the ultrasonic cavitation has a more vaporous nature which exerts a cushioning effect on the cavity implosion during collapse phase. As a consequence, the temperature of the hot spot and the extent of free radicals decrease. Thus, increasing the temperature could result in the decline in sono-degradation efficiency of pesticides.<sup>58,65,66</sup> A critical analysis of the literature indicates substantial extent of degradation can be achieved using sonication over the range of 20–40 °C.

Many studies have investigated the influences of temperature on sonochemical degradation of pesticides. For instance,<sup>43</sup> studied the effect of solution temperature on the sonochemical degradation of dicofol. They found that temperature of 20 °C as an optimum temperature for the highest rate of dicofol degradation and the degradation rate constant declined to 0.009 min<sup>-1</sup> and 0.008 min<sup>-1</sup> with a change in the temperature to 10 °C and 30 °C, respectively. Golash *et al.*<sup>44</sup> also reported that maximum extent of dichlorvos degradation using sonochemical reactors was obtained at an optimum temperature of 25 °C. They explained that higher operating temperatures resulting in a net diminish in the energy being released at the implosion and subsequently decreasing the extent of free radicals in the system. Zhang *et al.*<sup>40</sup> observed similar results in their survey.

**4.1.6. Influence of the initial concentration.** Based on the revised literature, the efficiency of pesticide sonodegradation can be significantly affected by its initial concentration. The initial degradation rate enhanced with a rise in the pesticide initial concentration up to the optimum value. At low concentrations of pesticides, a fraction of the hydroxyl radicals generated during sonolysis in the bulk of the solution may attack pesticides molecules and a considerable part of hydroxyl radicals recombine to yield H<sub>2</sub>O<sub>2</sub>. However, as the concentration pesticide is enhanced, the fraction of hydroxyl radicals that undergo recombination would diminish and the probability of hydroxyl radical attack on pesticide molecules increases and hence the degradation rate enhance.<sup>67,68</sup> Also, an increase in pesticide initial concentration in the bulk liquid lead to overcome limitation of diffusion and the mass diffusion rate into the interfacial film region and thereby increase the interfacial pesticide concentration. Thus, thermal decomposition along with radical attack at the interfacial region of cavitation bubbles is expected to be the dominant degradation pathway at the optimum concentration.<sup>50</sup> Alternatively, at higher pesticides initial concentration, the competition for reaction with hydroxyl radicals increases in the bulk solution. Meanwhile, with increasing in initial concentration of pesticide, a partial pressure increase on the cavitations bubbles and leads to diminish the transient high temperature inside the cavitation bubble.<sup>64,69</sup> Thus, the degradation efficiency of pesticide is decreased as the initial concentration of pesticide increases. It is recommended to optimize the initial concentration of pesticide based on the laboratory-scale studies as the optimum value will be dependent on the pesticide composition. Most investigations have also revealed that remarkable degradation yield can be obtained using low initial concentration of pesticide over the range of 0.1–100 µM.

In literature there are many studies analyzing the influence of initial concentration of pesticide on the efficiency of sonochemical degradation. For instance, Zhang *et al.*<sup>41</sup> observed a decrease in the degradation percentage from 51.3% to 10.8% when the initial concentration of diazinon was increased from 7.82 µM to 65.19 µM. Furthermore, similar results of a decrease in the degradation rate of pesticides with an increase in initial concentration during sonolysis have also been reported by Shayeghi *et al.*,<sup>46</sup> Kida *et al.*<sup>47</sup> and Yao *et al.*<sup>48</sup>

In another study, Debabrata and Sivakumar<sup>43</sup> investigated sonochemical degradation of dicofol with initial concentrations of 5.4 to 54 µM. They reported 27 µM, as the optimum initial concentration for the highest degradation rate. Also, they attributed the higher degradation rates of dicofol at concentration of 27 µM to higher pyrolysis of dicofol along with radical attack at interfacial region. Matouq *et al.*<sup>42</sup> observed an optimum initial concentration of 3.9 mM for diazinon degradation by high frequency of ultrasound.

**4.1.7. Influence of the time.** In general, the sonochemical degradation efficiency is a function of time and the extent of pesticide degradation increases with increasing sonication time. This can be explained by that the opportunity of the pesticide molecules and the acoustic cavitation process for reaction enhances by prolonging the degradation time. Also, the results show that the degradation profile could be considered in three distinct phases. The first step (Step 1) is represented by a sharp increase in the removal percentage of pesticide which is caused by the high concentrations of pesticides. By further increase in sonolysis time (Step 2) the degradation proceed more slowly. At the end of the sonodegradation process (Step 3), the yield of removal pesticide by a horizontal line remains the same. In other words, at start, the content of pesticide molecules are relatively high, the utilization of ultrasound could sufficiently played roles in degradation, the reaction is accelerated, as prolonging the degradation time, pesticide molecules are degraded gradually, leading to a slower reaction.<sup>70</sup> The typical range of required degradation times using the ultrasonic process would be anywhere between 5 min to 1 h. It is important to characterize the degradation process in terms of kinetics and then optimum treatment time using sonication can be selected.

Agarwal *et al.*<sup>16</sup> studied the sonolysis of azinphos-methyl for 20, 40 and 60 min treatment time. They observed that the removal efficiency of azinphos-methyl enhanced very quickly during the first 20 min and then it proceeded more slowly until 60 min. At the end of sonolysis, the yield of pesticide removal remained constant.

## 4.2. Synergetic effect of ultrasound and other degradation technologies

Although sonochemical reactions were quite efficient for degradation of pesticides, complete degradation was not achieved in most of the cases. This might be due to higher polarity of the organic compound, low availability of hydroxyl radical or lack of dissipated power.<sup>71</sup> Hydrophilic molecules with low vapor pressures tend to remain in the bulk phase; however, the extent of hydroxyl radicals is lesser than the interfacial region










liquid during sonication.<sup>62</sup> To overcome these limitations, the sonochemical process can be combined with advanced oxidation processes or other technologies. Some of the synergetic effects of ultrasound and other degradation processes are presented in Table 2.



**4.2.1. Ultrasound combined with Fenton process.** Fenton process is one of the most effective and promising methods for oxidizing pesticides. The Fenton reagent is constituted by a solution of hydrogen peroxide and ferrous iron ( $\text{Fe}^{2+}$ ) under acidic condition. The ferrous is oxidized to ferric ions and catalyses the decomposition of hydrogen peroxide into hydroxyl radicals (reaction (8)).<sup>83–85</sup>



The generated ferric iron reacts again with excess hydrogen peroxide to form more radicals (reaction (9)).<sup>83</sup> This reaction which is called Fenton-like reaction and slower about 6000 times than Fenton reaction, leads  $\text{Fe}^{2+}$  regeneration in an efficient cyclic mechanism.<sup>84</sup> In Fenton like reaction, besides ferrous ion regeneration, hydroperoxyl radicals ( $\text{HO}_2^\bullet$ ) are produced which can also attack pesticides, but they are less sensitive than hydroxyl radicals. Reactions (9)–(12) represent the rate limiting steps in the Fenton chemistry since  $\text{H}_2\text{O}_2$  is consumed and  $\text{Fe}^{2+}$  are regenerated from  $\text{Fe}^{3+}$  through these reactions. Formation of hydroxyl radicals includes a complex sequence of radical–radical reactions or hydrogen peroxide–radical reaction (reactions (13)–(16)).<sup>83</sup> Highly reactive hydroxyl radicals can degrade the pesticides, oxidizing and transforming them into by-products; they can react with other radicals; or with other ions/compounds in water (inefficient equations).<sup>83,84,86</sup> The oxidation mechanism for the Fenton process is shown in Fig. 4.



To enhance the hydroxyl radical concentration in the bulk phase, Fenton and ultrasonic cavitation can be combined together. These methods utilize the advantages of sonolysis and Fenton's reagent, allowing increased degradation of pollutants. The studies reported in the literature related to ultrasound/Fenton process on pesticides degradation are summarized in Table 2. The synergistic effect of ultrasonic cavitation and Fenton process leads to a higher formation of hydroxyl radicals. Ferric ions will react with hydrogen peroxide and produce a complex intermediate  $\text{Fe}-(\text{HO}_2)^{2+}$  (reaction (17)). Although  $\text{Fe}-(\text{HO}_2)^{2+}$  can be decomposed to  $\text{Fe}^{2+}$  and  $(\text{HO}_2)^\bullet$  spontaneously, the decomposition rate is much smaller. However, combined with the ultrasound, the decomposition rate of  $\text{Fe}-(\text{HO}_2)^{2+}$  can be greatly increased (reaction (18)).<sup>38</sup> Once ferrous iron had formed, it reacted with hydrogen peroxide and produced hydroxyl radical again, and then a cycle mechanism was established.<sup>87</sup> In other words, coupling US irradiation and Fenton oxidation (in the so-called sono-Fenton or US/Fenton process) can promote faster pesticide degradation due to (i) higher formation of  $\text{HO}^\bullet$ , (ii) improved mixing and contact between  $\text{HO}^\bullet$  and pesticide, and (iii) enhanced regeneration of ferrous ions.<sup>87</sup> Thus, using a combination of ultrasound and Fenton process leads to higher oxidation potential, improving degradation and mineralization rate of the pollutant. In addition, intense turbulence created by cavitation phenomena also results in promoting mass transfer rate and also enhancing utilization of hydroxyl radicals. Furthermore, in combined ultrasound/Fenton system, some part of hydrogen peroxide directly dissociates in the presence of ultrasonic cavitation generating additional hydroxyl radicals.<sup>31</sup> The reaction mechanism for the sono-Fenton process is shown in Fig. 5.



As shown in Table 2, many studies have investigated the degradation of pesticides using a combination of ultrasound and Fenton process. For example, Ma *et al.*<sup>88</sup> investigated the degradation of carbofuran by a combined ultrasound/Fenton process. They observed that more than 99% of the carbofuran was degraded by the combination of ultrasonic irradiation and Fenton process within short reaction time periods. They

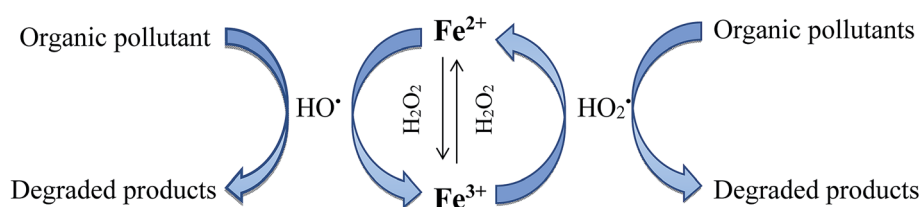


Fig. 4 Reaction mechanism for the Fenton process.



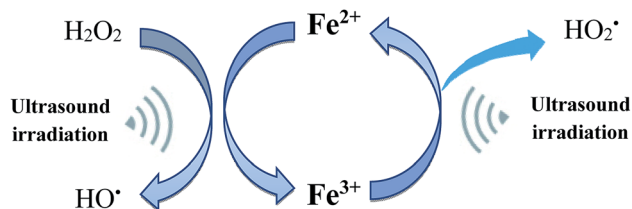



Fig. 5 Reaction mechanism for the sono-Fenton process.

reported an increase of 66% in the extent of carbofuran degradation when the Fenton process was combined with ultrasound.

Also, Wang *et al.*<sup>76</sup> studied the degradation of diazinon using ultrasonic irradiation facilitated by Fenton process. They reported that 98% degradation of diazinon was achieved by sono-Fenton process which increased by 61% compared with Fenton process.

#### 4.2.2. Ultrasound combined with photo-Fenton process.

The combination of ultrasound and ultraviolet irradiation along with Fenton reagent is known as sono-photo-Fenton process (SPF), which increased the generation of hydroxyl radicals in an aqueous system remarkably. As mentioned earlier, sonolysis of water generates hydroxyl radicals and hydrogen atoms which may recombine with each other to produce hydrogen peroxide and result in a low radical concentration that further slowed down the degradation process. However, combination of ultrasound and ultraviolet light increase the quantity of HO• by converting hydrogen peroxide produced by recombination of hydroxyl radicals (reaction (19)).<sup>60,83</sup> Furthermore, the intermediate complex produced by the reaction of ferric ions ( $\text{Fe}^{3+}$ ) with hydrogen peroxide during the Fenton reaction could be converted to ferrous ions by sonolysis (reaction (18)) and photolysis (reaction (20)). Hence, UV irradiation not only produces the additional hydroxyl radicals but also leads to regeneration of ferrous ions.<sup>9,84</sup> The reaction mechanism for the photo-Fenton process is shown in Fig. 6.



Additionally, the ferrous ions regenerated reacts with hydrogen peroxide. As a result, almost all hydrogen peroxide formed by sonication was consumed. Therefore, ultrasound

irradiation combined with photo-Fenton reaction would exhibit significant enhancement in the degradation of pesticides. The sonication combined with photo-Fenton process has several unique advantages, including simple handling, rapid degradation, and wide applicable pH range. The additional advantage of using sono-photo-Fenton process would be that SPF process declines the extent of ferrous ions present in the treated water, and this is crucial in an industrial point of view.<sup>89</sup>

Katsumata *et al.*<sup>78</sup> investigated the application of US/ferrioxalate/UV process for the degradation of fenitrothion. The initial pH was maintained at 6. After 30 min, almost complete degradation of fenitrothion was observed with sono-photo-Fenton process whereas 87% and 40% degradation was observed with ferrioxalate/UV and ultrasonic, respectively.

In another study,<sup>79</sup> they conducted an investigation on degradation of linuron by using ultrasound/ $\text{Fe}(\text{II})$ /UV process. The effect of  $\text{Fe}(\text{II})$  concentration and initial pH, on the degradation of linuron was investigated. The optimum initial concentration of  $\text{Fe}(\text{II})$  and pH were found to be  $1.2 \times 10^{-4} \text{ mol L}^{-1}$  and 3, respectively. The results showed that linuron was completely degraded after 20 min using ultrasound/UV/ $\text{Fe}(\text{II})$  process.

#### 4.2.3. Ultrasound combined with hydrogen peroxide.

Hydrogen peroxide is known to dissociate under the cavitating conditions and acts as a useful source for additional hydroxyl radicals to increase the extent of degradation of pollutants. The reaction occurring in the presence of ultrasonic irradiations, when hydrogen peroxide is added initially to the solution, can be given as follows:



Thus, using a combination of ultrasound and hydrogen peroxide causing higher degradation as compared to both the treatment schemes operated individually, due to the enhancement in the quantum of free radicals generated by the decomposition of hydrogen peroxide. Loadings of hydrogen peroxide decides the rate of dissociation of hydrogen peroxide and hence the rate of generation of the enhanced hydroxyl radicals and also on the reactivity of the generated free radicals especially hydroxyl radicals with the pollutant. The use of hydrogen peroxide in conjunction with sonication is only beneficial to the point where optimum loading is achieved. Above the optimum loadings, additional hydrogen peroxide acts as the scavenger of


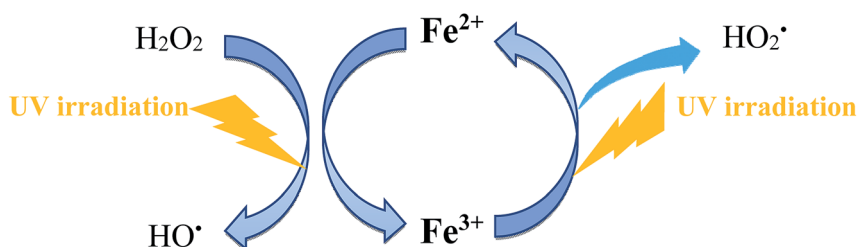


Fig. 6 Reaction mechanism for the sono-photo-Fenton process.





hydroxyl radicals and hence it results in a marginal enhance in the extent of degradation (reaction (22)).<sup>64</sup>










Thus, there exists an optimum loading of hydrogen peroxide where the extent of decomposition of hydrogen peroxide into hydroxyl radicals is appreciable and scavenging action of residual hydrogen peroxide is not dominating. The optimum concentration of hydrogen peroxide depends on the type of compound, reactor geometry, the operating conditions such as ultrasonic intensity.

Several studies have evaluated the effect of addition of hydrogen peroxide on sonochemical degradation of pesticides. For instance, Bagal *et al.*<sup>8</sup> studied the degradation of alachlor (initial concentration of 20 mg L<sup>-1</sup>) sonochemical reactor irradiated with 20 kHz ultrasound at the power dissipation of 100 W and reported that the optimum concentration of hydrogen peroxide is 0.07 g L<sup>-1</sup> giving a ratio of oxidant to pollutant as 3.5. Beyond this loading, a further increase in the hydrogen peroxide loading to 10 : 1 ratio resulted in a marginal increase in the extent of degradation.

Raut-Jadhav *et al.*<sup>59</sup> studied the degradation of methomyl by using the ultrasound cavitation in combination with H<sub>2</sub>O<sub>2</sub>. They found that complete degradation of methomyl was obtained after 27 min.

In other experiments, Shriwas *et al.*<sup>52</sup> reported an increase in the extent of degradation of methyl Parathion with an addition of the hydrogen peroxide till an optimum loading of 10 : 1 ratio of hydrogen peroxide to methyl Parathion. They found also that the extent of degradation decreases at addition ratio of 20 : 1.

**4.2.4. Ultrasound combined with carbon tetrachloride.** Presence of carbon tetrachloride during sonication can result in the intensification of the extent of degradation of pollutants like pesticides by way of formation of additional oxidizing species in the system. CCl<sub>4</sub>, as a hydrophobic organic compound, tends to enter the cavitation bubbles and undergoes degradation by pyrolytic cleavage, which leads to dissociation of CCl<sub>4</sub> molecules and formation of highly reactive chlorine radicals. The formation of chlorine radicals will lead to a series of recombination reactions generating strong oxidizing species in the system (reactions (23)–(30)).<sup>54,64</sup>





Along with hydroxyl radicals attack due to the sonolysis of water vapor in the cavitation bubble, the additional oxidizing species attack the organic compound present in the bulk phase or at the gas–liquid interface. Thus, this combined attack in the presence of CCl<sub>4</sub> remarkably enhances the rate of pollutant degradation. It is also important to note that adding CCl<sub>4</sub> can affect final toxicity levels of the system, if the additive is not utilized completely during the treatment scheme. Furthermore, the excessive amount of CCl<sub>4</sub> beyond an optimal value in the reaction system leads to formation of vaporous cavitation bubbles due to highly volatile nature of the additive and this reduces the net release of energy during the bubble implosion leading to decreased generation of oxidants. Hence, in order to prevent residual amount of CCl<sub>4</sub>, minimize the toxicity and achieve maximum intensification of degradation, selecting an optimum loading is a critical design consideration. The optimum loading of CCl<sub>4</sub> is strongly dependent on the type of the pollutant.<sup>44</sup>

Bagal *et al.*<sup>8</sup> have studied the ultrasonic degradation of alachlor in presence of CCl<sub>4</sub> (0.1 to 3 g L<sup>-1</sup>). They found that the extent of degradation increased with an increase in the CCl<sub>4</sub> loading till an optimum loading of 1 g L<sup>-1</sup> beyond which marginal increase in the extent of degradation was observed. Similar trends have been observed in the literature for sonochemical degradation of methyl Parathion in the presence of CCl<sub>4</sub>.<sup>52</sup>

**4.2.5. Ultrasound combined with ozonation process (O<sub>3</sub>).** Ozonation is one of the advanced oxidation processes widely used for the removal of different pollutants like pesticides, owing to the effective, powerful and nonselective oxidizing agent of ozone. Two distinct pathways have been determined for oxidation by ozonation method: direct oxidation by ozone molecules or indirect oxidation by hydroxyl free radicals (HO<sup>•</sup>) produced during ozone decomposition.<sup>90</sup>

Ultrasound/ozone combination can be more effective and beneficial than US or O<sub>3</sub> alone treatment for the degradation of pesticides. The use of ultrasound in combination with ozone can allow the decline of both ozone consumption and ultrasonic energy, with the consequent decline of operating costs.<sup>51</sup> In a collapsing cavitation bubble, the pyrolytic decomposition of ozone and subsequent hydroxyl radical formation occurs as follows:



Ultrasonic irradiations produce better utilization of the oxidant through improving the decomposition of ozone and results in generation of more active species, such as hydroxyl radicals and nascent oxygen. Furthermore, in US/O<sub>3</sub> process, cavitation effect of ultrasound leads to formation of myriad of tiny air bubbles which enable most O<sub>3</sub> to enter the liquid medium or react on the bubble–liquid interface. In other words, ultrasound promotes the mass transfer of O<sub>3</sub> to the solution by the turbulence produced from cavitation effects. Thus, ultrasound overcomes mass transfer resistance, as a major limiting





factor for the application of ozone alone. Hence, the enhancement of the mass transfer and dissociation processes of ozone coupled with high-localized temperatures and pressures upon the collapsing of cavities increase the generation of highly reactive hydroxyl radicals which results in a higher reaction rate.<sup>70</sup> The ultrasound/ozonation mechanism is proposed and illustrated in Fig. 7.



The extent of degradation increases with an increase in the ozone flow rate up to optimum value, which can attribute to the improvement of the mass transfer rate of O<sub>3</sub> from air-ozone bubbles to the liquid medium. The enhancement in gas holdup enhances the bubble-liquid interfacial area with a consequent enhance in the mass transfer rate of O<sub>3</sub> from the gas bubbles to the solution and the increase in the free radicals concentration. Beyond the optimum, the degradation rate diminishes with increasing ozone flow rate due to transfer of the bubbly regime to the heterogeneous regime where large bubbles size start to form as a result of ozone bubble collision and coalescence. The formation of the large bubbles decreases the bubble-liquid interfacial region considerably, with a consequent reduction in the O<sub>3</sub> transfer rate from the gas phase to the liquid phase.<sup>70,91</sup>

Wang *et al.*<sup>72</sup> reported that the degradation efficiency of acephate by combined ultrasonic/ozonation method was 27% greater than the degradation efficiency when individual ozonation method was used after 60 min.

Patil *et al.*<sup>75</sup> found that combination of ozone and ultrasonic irradiations was the best approach for effective removal of dichlorvos and complete degradation of dichlorvos was obtained by using the combined method.

**4.2.6. Ultrasound combined with photocatalytic process.** Recently, sonophotocatalytic oxidation has been widely used for the degradation of toxic and hazardous pollutants like pesticides. Using combination of sonolysis and photocatalysis results in generation of sufficient quantity of hydroxyl radicals through both band gap excitation of titanium dioxide (TiO<sub>2</sub>) (reactions (33)–(35)) as well as sonolytic splitting of water molecules and leads to completely oxidize majority of the pesticides. Titanium dioxide is the most widely accepted photocatalyst for such treatments owing to some of its unique advantages including low cost, commercial availability, stability, harmlessness, non-toxic and high efficiency.<sup>69,92,93</sup> Compared to individual processes, sonophotocatalysis provides

numerous advantages such as improvement penetrating ability of light, enhancement of aggregation of catalyst particles, keeping particle in floating condition and acceleration of the splitting of H<sub>2</sub>O<sub>2</sub> to form more HO· and HO<sub>2</sub>· free radicals. In addition, ultrasound irradiation increases the catalyst surface due to reducing particle size and continuously cleans the photocatalyst surface during the operation.<sup>81,94</sup> Schematic of the pesticides degradation mechanism by photocatalytic and sono-photocatalytic processes are shown in Fig. 8 and 9, respectively.



Upon irradiation of catalyst with light energy higher or equal to the band gap energy, an electron from the valence band elevated to the conduction band with simultaneous production of a hole in the valence band.<sup>95</sup> The valence band holes have the ability to oxidize the organic compounds, or they can react with OH<sup>−</sup> or H<sub>2</sub>O to form strong oxidizing hydroxyl radicals.<sup>96</sup> On the other hand, the conduction band electrons can also react with dissolved oxygen to produce superoxide radical anion (O<sub>2</sub><sup>·−</sup>) which can also lead to generation of additional hydroxyl radicals as a major active species.<sup>75</sup>

As shown in Table 2, numerous studies evaluated the effectiveness of ultrasound application in combination with photocatalysis process for pesticide removal. Patil *et al.*<sup>75</sup> examined sonophotocatalytic degradation of dichlorvos using TiO<sub>2</sub> at different loadings of TiO<sub>2</sub> (0.01 g L<sup>−1</sup>, 0.075 g L<sup>−1</sup>, 0.1 g L<sup>−1</sup> and 0.2 g L<sup>−1</sup>). They reported that the maximum degradation efficiency after 2 h treatment was obtained at a TiO<sub>2</sub> concentration of 0.1 g L<sup>−1</sup> (78.5%) beyond which the extent of degradation is nearly constant. Similar results were found by Sathishkumar *et al.*<sup>82</sup> for sonophotocatalytic (42 kHz) degradation of Simazine in the presence of Au-TiO<sub>2</sub> nanocatalysts. They reported that the order of Simazine degradation was, sonophotocatalysis > sonocatalysis > photocatalysis.

Sajjadi *et al.*<sup>15</sup> performed sonochemical degradation of diazinon using catalyzed persulfate with Fe<sub>3</sub>O<sub>4</sub>@MOF-2 nanocomposite. They reported that complete degradation was

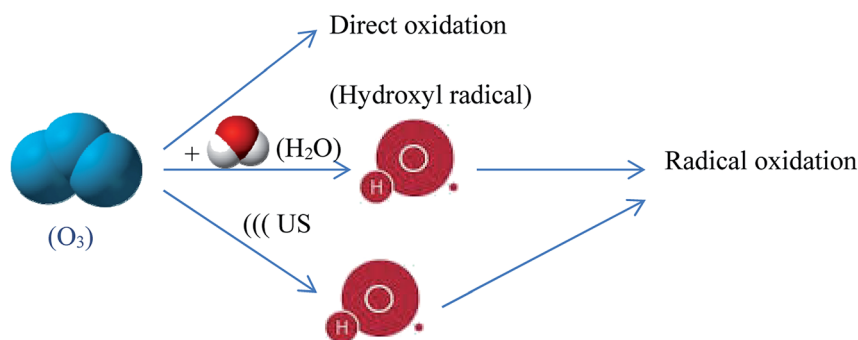


Fig. 7 Proposed schematic ultrasound/ozonation mechanism.



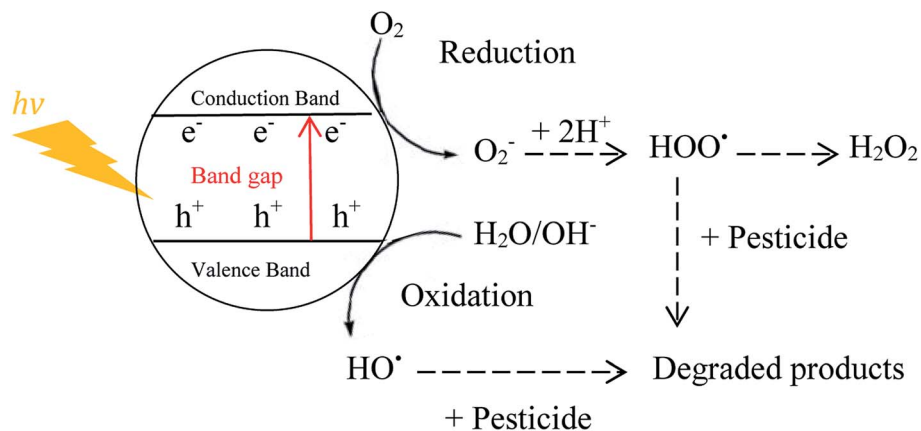


Fig. 8 Proposed schematic photocatalytic degradation mechanism of pesticides.

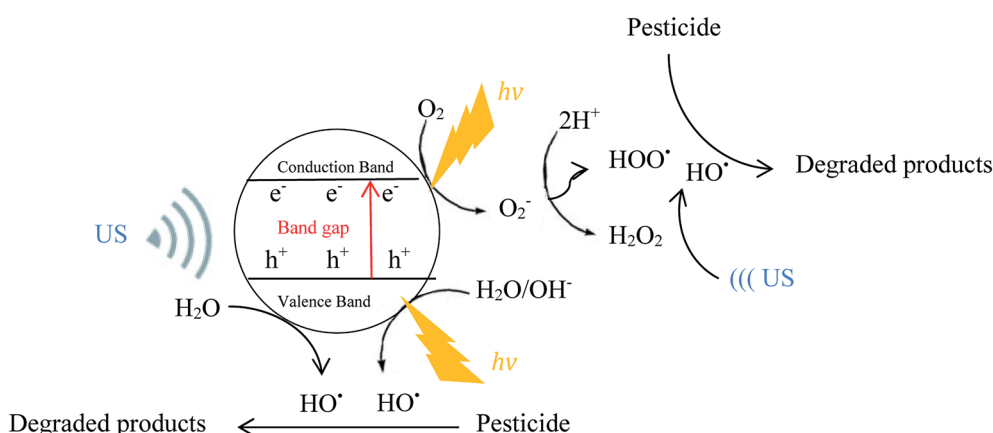


Fig. 9 Proposed schematic sono-photocatalytic degradation mechanism of pesticides.

achieved by the  $Fe_3O_4@MOF-2/US/PS$  system and the combined system was a capable degradation process for pesticide treatment.

Madhavan *et al.*<sup>81</sup> studied the sonophotocatalytic degradation of monocrotophos using  $TiO_2$ . They reported that a slight improvement in the degradation rate was observed for sono-photocatalysis relative to sonolysis due to inhibition effect of phosphate ions.

## 5. Path forward and research needs

There are a variety of aspects in the application of ultrasound waves to removal pesticides that require to be addressed in the future. Several crucial issues where future studies should be directed are mentioned below. A detailed overview of the studies related to sonochemical degradation of pesticides has indicated that significant intensification in term of enhanced removal, can be obtained with the use of ultrasound either alone or in combination with other technologies. However, it has been observed that the majority of the studies have been based on the use of simple designs of batch sonochemical reactors such as ultrasonic bath and ultrasonic horn which may not be efficient at industrial scale operation. Further research may be directed

in terms of improvement of novel sonoreactor designs based on the use of multiple transducers resulting into uniform and enhanced cavitation activity.

Also, there is a need to develop continuous flow ultrasonic reactor with transducers attached to the reactor wall and the solution, hence, placing several units in parallel can omit scale up problems as the sonoreactor geometry remains constant and matches the penetration depth of the ultrasonic wave.

Another problem preventing the effective operation at industrial scale is possible erosion of transducer material with continuous utilization leading to a reduced transfer of energy and also require for frequent maintenance and/or replacement. Therefore, the further research studies need to be directed in terms of improvement of high power ultrasonic transducers, with higher power capacity, efficiency, radiating surface area and more sophisticated control system.

The analysis of scientific literature shows that most studies focus on low pesticide concentrations in synthetic samples; however, the pesticide wastewater has a very high strength wastewater that contained various toxic and detrimental contaminants. The natural water samples use is a crucial factor for the reliable assessment of removal process efficiency, as it



permits the investigation of conditions close to the actual ones, therefore paving the way for process scale-up considerations.

Theoretical work is indeed required for efficient optimization of the large-scale design of the sonoreactor. Based on theoretical analysis, one can obtain the pressure field distribution in any new sonoreactor with various geometries and operating conditions, which can help in optimization for maximum/uniform distribution of cavitational activity. The modeling investigations can be extended to quantification of other operational parameters such as mass transfer coefficient, distribution of temperature, liquid streaming, *etc.*, which can be controlling process parameters considering the specific application of pesticide removal.

In the perspective of large-scale applications of sonochemical degradation of pesticides, a fundamental aspect to be better clarified is the possible generation of hazardous intermediated or products: to this end, toxicological researches are needed.

From the economic value perspective, the feasibility of this approach full-scale needs to be assessed. Therefore, more research studies should be conducted in order to establish energy consumption levels, in order to evaluate both the technical and economic competitiveness of ultrasound towards conventional treatment methods. These items must be considered as future research directions.

## 6. Conclusions

In recent years, the majority of studies have been focused on the search for alternative and innovative techniques for removal of pesticides from aqueous solution. A detailed analysis into different aspects of pesticide degradation using ultrasonic technology alone or in combination with oxidation processes has been performed. This review clearly establishes that ultrasound as a promising technology has great potential in degradation of different types of pesticides. The pesticide degradation process under ultrasonic irradiation is controlled by pyrolysis and free radical reactions. The extent of degradation strongly depends on both sonochemical conditions, namely, frequency and power and operational parameters such as initial pesticide concentration, temperature, pH, dissolved gas, *etc.* Besides, the characteristics of the pesticides (vapor pressure, density, surface tension, *etc.*) influence sonochemical reactions. Ultrasound has been proved to be an effective technology with advantages of in terms of operational simplicity, safety, cleanliness, energy consumption, kinetic rate, and secondary pollutant formation. Nevertheless, sonochemical degradation is effective with compounds possessing a high vapor pressure and sometimes it needs much higher energy for complete decomposition which is economically not desirable. Literature data also pointed out that to overcome these limitations, the sonochemical process can be combined with advanced oxidation processes. Most of the studies on sonochemical degradation of pesticides are laboratory oriented which cannot be implemented directly in large-scale applications. On the basis of this literature review, major attention should be devoted in the future to the kinetics, reactor design, criteria for cost effectiveness and large industrial scale applications.

## Conflicts of interest

There are no conflicts to declare.

## Acknowledgements

The authors gratefully acknowledge the Research Council of Kermanshah University of Medical Sciences for the financial support.

## References

- 1 P. Nicolopoulou-Stamati, S. Maipas, C. Kotampasi, P. Stamatis and L. Hens, *Front. Public Health*, 2016, **4**, 1–8.
- 2 R. A. Hamza, O. T. Iorhemen and J. H. Tay, *Environ. Technol. Innov.*, 2016, **5**, 161–175.
- 3 M. Köck-Schulmeyer, M. Villagrasa, M. López de Alda, R. Céspedes-Sánchez, F. Ventura and D. Barceló, *Sci. Total Environ.*, 2013, **458–460**, 466–476.
- 4 R. Kaur, G. K. Mavi, S. Raghav and I. Khan, *Int. J. Curr. Microbiol. Appl. Sci.*, 2019, **8**, 1889–1897.
- 5 M. Arias-Estévez, E. López-Periago, E. Martínez-Carballo, J. Simal-Gándara, J. C. Mejuto and L. García-Río, *Agric., Ecosyst. Environ.*, 2008, **123**, 247–260.
- 6 A. Marican and E. F. Durán-Lara, *Environ. Sci. Pollut. Res.*, 2018, **25**, 2051–2064.
- 7 J. George and Y. Shukla, *J. Proteomics*, 2011, **74**, 2713–2722.
- 8 M. V. Bagal and P. R. Gogate, *Sep. Purif. Technol.*, 2012, **90**, 92–100.
- 9 S. Raut-Jadhav, V. K. Saharan, D. V. Pinjari, D. R. Saini, S. H. Sonawane and A. B. Pandit, *J. Environ. Chem. Eng.*, 2013, **1**, 850–857.
- 10 R. Al-Shawabkha, Z. Al-Qodah and A. Al-Bsoul, *Desalin. Water Treat.*, 2015, **53**, 2555–2564.
- 11 S. Mostafalou and M. Abdollahi, *Toxicol. Appl. Pharmacol.*, 2013, **268**, 157–177.
- 12 H. Xie, L. Zhu, T. Ma, J. Wang, J. Wang, J. Su and B. Shao, *J. Environ. Sci.*, 2010, **22**, 1930–1935.
- 13 J. Rodriguez-Campos, L. Dendooven, D. Alvarez-Bernal and S. M. Contreras-Ramos, *Appl. Soil Ecol.*, 2014, **79**, 10–25.
- 14 V. L. Gole, A. Fishgold, R. Sierra-Alvarez, P. Deymier and M. Keswani, *Sep. Purif. Technol.*, 2018, **194**, 104–110.
- 15 S. Sajjadi, A. Khataee, N. Bagheri, M. Kobya, A. Şenocak, E. Demirbas and A. G. Karaoğlu, *J. Ind. Eng. Chem.*, 2019, **77**, 280–290.
- 16 S. Agarwal, I. Tyagi, V. K. Gupta, M. H. Dehghani, A. Bagheri, K. Yetilmezsoy, A. Amrane, B. Heibati and S. Rodriguez-Couto, *J. Mol. Liq.*, 2016, **221**, 1237–1242.
- 17 I. Arslan-Alaton, G. Tureli and T. Olmez-Hanci, *J. Photochem. Photobiol., A*, 2009, **202**, 142–153.
- 18 S. Wang, B. Huang, Y. Wang and L. Liao, *Ultrason. Sonochem.*, 2006, **13**, 506–510.
- 19 R. A. Torres, R. Mosteo, C. Pétrier and C. Pulgarin, *Ultrason. Sonochem.*, 2009, **16**, 425–430.
- 20 K. Thangavadivel, M. Megharaj, R. S. C. Smart, P. J. Lesniewski and R. Naidu, *J. Hazard. Mater.*, 2009, **168**, 1380–1386.



- 21 M. Ashokkumar, *Handb. Ultrason. Sonochemistry*, 2016, pp. 813–839.
- 22 N. C. J. David, *Fundamentals and Applications of Ultrasonic Waves*, CRC Publisher, USA, 2000, pp. 15–23.
- 23 K. S. Suslick, *Sci. Am.*, 1989, **260**, 80–86.
- 24 H. M. Santos, C. Lodeiro and J. L. Capelo-Martínez, *Ultrasound in Chemistry*, 2009, pp. 80–86.
- 25 X. Cheng, M. Zhang, B. Xu, B. Adhikari and J. Sun, *Ultrason. Sonochem.*, 2015, **27**, 576–585.
- 26 B. Gielen, J. Jordens, J. Janssen, H. Pfeiffer, M. Wevers, L. C. J. Thomassen, L. Braeken and T. Van Gerven, *Ultrason. Sonochem.*, 2015, **25**, 31–39.
- 27 M. Ashokkumar, J. Lee, Y. Iida, K. Yasui, T. Kozuka, T. Tuziuti and A. Towata, *Phys. Chem. Chem. Phys.*, 2009, **11**, 10118–10121.
- 28 M. Ashokkumar, *Ultrason. Sonochem.*, 2011, **18**, 864–872.
- 29 H. Ghodbane and O. Hamdaoui, *Ultrason. Sonochem.*, 2009, **16**, 593–598.
- 30 L. K. Weavers, N. Malmstadt and M. R. Hoffmann, *Environ. Sci. Technol.*, 2000, **34**, 1280–1285.
- 31 S. Chitra, K. Paramasivan, P. K. Sinha and K. B. Lal, *J. Cleaner Prod.*, 2004, **12**, 429–435.
- 32 P. Chowdhury and T. Viraraghavan, *Sci. Total Environ.*, 2009, **407**, 2474–2492.
- 33 T. G. Leighton, *Prog. Biophys. Mol. Biol.*, 2007, **93**, 3–83.
- 34 R. S. Davidson, A. Safdar, J. D. Spencer and B. Robinson, *Ultrasonics*, 1987, **25**, 35–39.
- 35 A. L. Marshall, *J. Am. Chem. Soc.*, 1932, **54**, 4460–4461.
- 36 M. A. Beckett and I. Hua, *Water Res.*, 2003, **37**, 2372–2376.
- 37 M. Sivakumar, P. A. Tatake and A. B. Pandit, *Chem. Eng. J.*, 2002, **85**, 327–338.
- 38 Y. L. Song, J. T. Li and H. Chen, *J. Chem. Technol. Biotechnol.*, 2009, **84**, 578–583.
- 39 K. Sekiguchi, C. Sasaki and K. Sakamoto, *Ultrason. Sonochem.*, 2011, **18**, 158–163.
- 40 Y. Zhang, Y. Hou, F. Chen, Z. Xiao, J. Zhang and X. Hu, *Chemosphere*, 2011, **82**, 1109–1115.
- 41 Y. Zhang, W. Zhang, X. Liao, J. Zhang, Y. Hou, Z. Xiao, F. Chen and X. Hu, *Ultrason. Sonochem.*, 2010, **17**, 662–668.
- 42 M. A. Matouq, Z. A. Al-Anber, T. Tagawa, S. Aljbouir and M. Al-Shannag, *Ultrason. Sonochem.*, 2008, **15**, 869–874.
- 43 P. Debabrata and M. Sivakumar, *Chemosphere*, 2018, **204**, 101–108.
- 44 N. Golash and P. R. Gogate, *Ultrason. Sonochem.*, 2012, **19**, 1051–1060.
- 45 J. D. Schramm and I. Hua, *Water Res.*, 2001, **35**, 665–674.
- 46 M. Shayeghi, M. Dehghani and A. Fadaei, *Iran. J. Public Health*, 2014, **40**, 122–128.
- 47 M. Kida, S. Ziembowicz and P. Koszelnik, *Sep. Purif. Technol.*, 2018, **192**, 457–464.
- 48 J. J. Yao, N. Y. Gao, C. Li, L. Li and B. Xu, *J. Hazard. Mater.*, 2010, **175**, 138–145.
- 49 M. D. Luque de Castro and F. Priego-Capote, *Techniques and instrumentation in analytical chemistry - Analytical applications of ultrasound*, 2007, vol. 26.
- 50 J. González-García, V. Sáez, I. Tudela, M. I. Díez-García, M. D. Esclapez and O. Louisnard, *Water*, 2010, **2**, 28–74.
- 51 V. Naddeo, A. Cesaro, D. Mantzavinos, D. Fatta-Kassinos and V. Belgiorno, *Global NEST J.*, 2014, **16**, 561–577.
- 52 A. K. Shriwas and P. R. Gogate, *Sep. Purif. Technol.*, 2011, **79**, 1–7.
- 53 L. Yang, J. Z. Sostaric, J. F. Rathman and L. K. Weavers, *J. Phys. Chem. B*, 2008, **112**, 852–858.
- 54 H. M. Hung and M. R. Hoffmann, *J. Phys. Chem. A*, 1999, **103**, 2734–2739.
- 55 M. A. Beckett and I. Hua, *J. Phys. Chem. A*, 2001, **105**, 3796–3802.
- 56 M. Sivakumar and A. B. Pandit, *Ultrason. Sonochem.*, 2001, **8**, 233–240.
- 57 P. Kanthale, M. Ashokkumar and F. Grieser, *Ultrason. Sonochem.*, 2008, **15**, 143–150.
- 58 M. H. Entezari and P. Kruus, *Ultrason. Sonochem.*, 1996, **3**, 19–24.
- 59 S. Raut-Jadhav, D. V. Pinjari, D. R. Saini, S. H. Sonawane and A. B. Pandit, *Ultrason. Sonochem.*, 2016, **31**, 135–142.
- 60 L. Wang, *Water Res.*, 2001, **35**, 3927–3933.
- 61 R. H. Jawale and P. R. Gogate, *Ultrason. Sonochem.*, 2018, **40**, 89–96.
- 62 Y. Jiang, C. Pétrier and T. D. Waite, *Ultrason. Sonochem.*, 2002, **9**, 163–168.
- 63 Z. Wei, R. Spinney, R. Ke, Z. Yang and R. Xiao, *Environ. Chem. Lett.*, 2016, **14**, 163–182.
- 64 S. Merouani, O. Hamdaoui, F. Saoudi and M. Chiha, *Chem. Eng. J.*, 2010, **158**, 550–557.
- 65 P. R. Gogate, A. Marie and A. B. Pandit, *Ultrason. Sonochem.*, 2003, **10**, 325–330.
- 66 K. S. Suslick and W. L. Nyborg, *Sci.*, 1989, **243**, 1499.
- 67 M. H. Dehghani and A. Fadaei, *Environ. Prot. Eng.*, 2013, **39**, 5–14.
- 68 E. Nikfar, M. H. Dehghani, A. H. Mahvi, N. Rastkari, M. Asif, I. Tyagi, S. Agarwal and V. K. Gupta, *J. Mol. Liq.*, 2016, **213**, 332–338.
- 69 M. Rahimi, N. Moradi, M. Faryadi and S. Safari, *Desalin. Water Treat.*, 2016, **57**, 1–9.
- 70 X. D. Fan, W. L. Zhang, H. Y. Xiao, T. Q. Qiu and J. G. Jiang, *RSC Adv.*, 2015, **5**, 45622–45630.
- 71 Q. Ren, C. Yin, Z. Chen, M. Cheng, Y. Ren, X. Xie, Y. Li, X. Zhao, L. Xu, H. Yang and W. Li, *Microchem. J.*, 2019, **145**, 146–153.
- 72 B. Wang, C. p. Zhu, R. h. Gong, J. Zhu, B. Huang, F. Xu, Q. g. Ren, Q. b. Han and Z. b. He, *Water Sci. Eng.*, 2015, **8**, 233–238.
- 73 L. Jing, B. Chen, D. Wen, J. Zheng and B. Zhang, *J. Environ. Manage.*, 2017, **203**, 182–190.
- 74 Y. S. Ma and C. F. Sung, *Sustainable Environ. Res.*, 2010, **20**, 213–219.
- 75 P. N. Patil and P. R. Gogate, *J. Water Process Eng.*, 2015, **8**, e58–e65.
- 76 C. K. Wang and Y. H. Shih, *Sustainable Environ. Res.*, 2016, **26**, 110–116.
- 77 Y. N. Liu, D. Jin, X. P. Lu and P. F. Han, *Ultrason. Sonochem.*, 2008, **15**, 755–760.
- 78 H. Katsumata, T. Okada, S. Kaneco, T. Suzuki and K. Ohta, *Ultrason. Sonochem.*, 2010, **17**, 200–206.



- 79 H. Katsumata, T. Kobayashi, S. Kaneco, T. Suzuki and K. Ohta, *Chem. Eng. J.*, 2011, **166**, 468–473.
- 80 M. Kask, M. Krichevskaya and J. Bolobajev, *J. Environ. Chem. Eng.*, 2019, **7**, 103095.
- 81 J. Madhavan, P. S. Sathish Kumar, S. Anandan, F. Grieser and M. Ashokkumar, *J. Hazard. Mater.*, 2010, **177**, 944–949.
- 82 P. Sathishkumar, R. V. Mangalaraja, H. D. Mansilla, M. A. Gracia-Pinilla and S. Anandan, *Appl. Catal., B*, 2014, **160–161**, 692–700.
- 83 A. Babuponnusami and K. Muthukumar, *J. Environ. Chem. Eng.*, 2014, **2**, 557–572.
- 84 M. h. Zhang, H. Dong, L. Zhao, D. x. Wang and D. Meng, *Sci. Total Environ.*, 2019, **670**, 110–121.
- 85 S. Dogruel, T. Olmez-Hanci, Z. Kartal, I. Arslan-Alaton and D. Orhon, *Water Res.*, 2009, **43**, 3974–3983.
- 86 J. J. Pignatello, E. Oliveros and A. MacKay, *Crit. Rev. Environ. Sci. Technol.*, 2006, **36**, 1–84.
- 87 S. Adityosulindro, L. Barthe, K. González-labrada, J. J. Haza, H. Delmas, C. Julcour, S. Adityosulindro, L. Barthe, K. González-labrada, U. Javier and J. Haza, *Ultrason. Sonochem.*, 2018, **39**, 889–896.
- 88 Y. S. Ma, C. F. Sung and J. G. Lin, *J. Hazard. Mater.*, 2010, **178**, 320–325.
- 89 P. Vaishnave, A. Kumar, R. Ameta, P. B. Punjabi and S. C. Ameta, *Arabian J. Chem.*, 2014, **7**, 981–985.
- 90 W. K. Lafi and Z. Al-Qodah, *J. Hazard. Mater.*, 2006, **137**, 489–497.
- 91 S. Song, Z. He and J. Chen, *Ultrason. Sonochem.*, 2007, **14**, 84–88.
- 92 S.-Y. Lee and S.-J. Park, *J. Ind. Eng. Chem.*, 2013, **19**, 1761–1769.
- 93 B. Shahmoradi, A. Maleki and K. Byrappa, *Catal. Sci. Technol.*, 2011, **1**, 1216–1223.
- 94 A. Paleologou, H. Marakas, N. P. Xekoukoulotakis, A. Moya, Y. Vergara, N. Kalogerakis, P. Gikas and D. Mantzavinos, *Catal. Today*, 2007, **129**, 136–142.
- 95 M. Moradi, F. Ghanbari, M. Manshoury and K. A. Angali, *Korean J. Chem. Eng.*, 2016, **33**, 539–546.
- 96 S. Tabasideh, A. Maleki, B. Shahmoradi, E. Ghahremani and G. McKay, *Sep. Purif. Technol.*, 2017, **189**, 186–192.

