


Cite this: *RSC Adv.*, 2020, 10, 23212

The contributions and mechanisms of iron-microbes-biochar in constructed wetlands for nitrate removal from low carbon/nitrogen ratio wastewater†

Jian Xu,^{ab} Xiawei Liu,^{ab} Jiaolong Huang,^{ab} Manqi Huang,^{ab} Tao Wang,^{ab} Shaopan Bao,^a Wei Tang^a and Tao Fang^{ib}*^{ab}

The removal efficiency of nitrate from low carbon/nitrogen ratio wastewater has been restricted by the lack of organics for several decades. Here, a system coupling chemical reduction, microbial denitrification and constructed wetlands (RDCWs) was developed to investigate the effect and possible mechanisms for nitrate degradation. The results showed that this coupling system could achieve a nitrate removal efficiency of $97.07 \pm 1.76\%$, $85.91 \pm 3.02\%$ and $56.63 \pm 2.88\%$ at a hydraulic retention time of 24 h, 12 h and 6 h with feeding nitrate of 15 mg L^{-1} , respectively. These removal efficiencies of nitrate were partly caused by microbes and biochar with a contribution rate of $31.08 \pm 4.43\%$ and $9.50 \pm 3.30\%$. Besides, microbes were closely related to iron and biochar for the removal of nitrate. *Simplicispira* was able to utilize hydrogen produced by iron corrosion as an electron donor while nitrate accepted electrons to be reduced. Porous biochar could release dissolved organic matter, which provided a good living circumstance and carbon source for microbes. Therefore, the RDCW system is potential for large-scale application due to its low cost and simple operation.

Received 22nd April 2020
Accepted 11th June 2020

DOI: 10.1039/d0ra03609a

rsc.li/rsc-advances

1. Introduction

Nitrate in water bodies is a widespread environmental pollutant mainly from the use of a large number of artificial fertilizers, discharge of domestic sewage, output of immoderate industrial by-products, *etc.*¹ It is universally found in groundwater, polluted surface water and the outflow of sewage treatment plants,² and nitrate-polluted water commonly possesses a low carbon/nitrogen ratio (COD/TN lower than 3) feature.³ Nitrate contaminations can bring about eutrophication and are even likely to pose a potential risk to human health. There is, therefore, increased attention for the removal of nitrate from low carbon/nitrogen ratio wastewater.

In recent years, constructed wetlands (CWs) which take advantage of the substrates, such as quartz sand, coarse gravel, ceramics and shells, to remove suspended solid and nitrate in wastewater have become more and more popular.⁴ The mechanisms of the removal include filtration, adsorption, precipitation, volatilization, plant uptake and microbial processes.⁵ The CWs can better reflect actual nitrate removal efficiency

compared to our previous batch experiments.⁶ Zhang *et al.* and Tang *et al.* used combined reactors including multiple substrates to degrade nitrogen.^{7,8} Wu *et al.* and Zhu *et al.* removed nitrate through different bioreactors.^{9,10} Although CWs are low cost and simple maintenance requirements,¹¹ the removal efficiency of nitrate is limited. Jia *et al.* and Wu *et al.* reported that CWs have not well nitrate removal efficiency for the tailwater from sewage treatment plants.^{12,13} This lies in the fact that microbial denitrification as main role in CWs utilizes organic carbon source to degrade nitrate while there is a lack of organics in low carbon/nitrogen ratio wastewater. The conflict of two phenomena leads to low nitrate removal rate.

The most of microbial nitrate removal methods in CWs are heterotrophic denitrification, which demands organic carbon, like sucrose, methanol, ethanol and acetate,⁶ as carbon source and electron donor. In contrast, microbes carrying out autotrophic denitrification make use of inorganic matter as energy and electron donor. For low carbon/nitrogen ratio wastewater, its organics content is low-down or close to none. Thus, heterotrophic denitrifying microbes are inadapted to live in this wastewater due to insufficient carbon source while autotrophic denitrifying microbes are suitable for survival through inorganic substances and conducting autotrophic denitrification. In order to generate autotrophic denitrification, denitrifying microbes in previous studies required be inoculated, cultivated and enriched. Zhang *et al.* purchased 28 strains that

^aInstitute of Hydrobiology, Chinese Academy of Sciences, No. 7 Donghu South Road, Wuchang District, Wuhan 430072, China. E-mail: fangt@ihb.ac.cn

^bUniversity of Chinese Academy of Sciences, Beijing 100049, China

† Electronic supplementary information (ESI) available. See DOI: 10.1039/d0ra03609a



are relevant to bioremediation to be cultivated so as to facilitate nitrate removal.¹⁴ Till *et al.* cultivated *Paracoccus denitrificans* before combining with iron to carry out autotrophic denitrification.¹⁵ An *et al.* enriched alone *Alcaligenes eutrophus* from sub-superficial soil to construct iron-bacteria system.¹⁶ These ways used cause not only the difficulty of obtaining pure bacteria but also the expensive cost of bacteria cultivation. Their cultured bacteria mostly utilize hydrogen as energy owing to its nontoxic and clean by-products, but supplying indispensable hydrogen is the main problem. If hydrogen is produced through water electrolysis, the operational cost will sharply improve. Moreover, the security risk will increase when hydrogen is stored and escaped.

Consequently, to solve the trouble of enrichment of autotrophic denitrifying microbes and hydrogen supply, the substrates in CWs are replaced by a few other materials. Some researchers apply nanoscale zero-valent iron (nZVI) to enhance reaction rates¹⁷ but it is unbeneficial for the immobilization of iron powers and microbes, and later difficult to maintain long-term high efficiency of nitrate removal. Apart from this, its cost is also hard to accept. Nevertheless, iron scraps as main solid waste produced by steel mills and machinery processing plants are suitable to be used. Not only is the cost of iron scraps about one-third the price of nZVI¹⁸ but also they are as the attachments of microbes and have high-efficient nitrate removal for a long time. Wu *et al.* reported that iron particles were used to remove nitrate pollutants from contaminated groundwater with well eliminative effect for more than a decade.¹⁹ Iron scraps are soaked in target wastewater for some time, resulting in the large amounts of autotrophic denitrifying microbes as iron scraps can produce hydrogen as energy of denitrifying microbes through corrosion. Till *et al.* utilized steel wool and autotrophic denitrifying microbes to remove nitrate, reaching an average nitrate removal efficiency of 61% at hydraulic retention time (HRT) of 2.33 days.¹⁵ Lavania and Bose showed that the combination of hydrogenotrophic denitrification and steel wool provided nitrate removal rate of 75%, nevertheless, HRT reached 26 days.²⁰ These reports reveal that efficiency of nitrate removal need to be further improved in the premise of shortening HRT and the contribution of microbes ought to be indicated for analyzing denitrification mechanisms and better cooperating with iron scraps to eliminate nitrate.

Biochar, a carbon-abundant product, is produced from pyrolyzing organic materials and has attracted increasing eyes in recent years since it can generate renewable energy, such as biogas and bio-oil,²¹ and absorb toxic metals and organic chemicals in soil and water.^{22–24} Compared with our previous work,⁶ the addition of biochar may improve nitrate removal. However, it has not yet been widely studied that biochar and microbes give rise to joint effect on nitrate reduction in water bodies. Coelho *et al.* suggested that activated carbon particles can help denitrification of microbes in wastewater because of their irregular surface shape and adsorptive ability.²⁵ Beck *et al.* found that biochar-amended soil enhances reductive capacity of nitrogen and phosphorus in the leaching *via* adding the soil surface area to improve absorbency.²⁶ Wu *et al.* revealed that the addition of biochar reduces the nitrogen losses to composting

of organic wastes owing to its high sorption capacity.²⁷ Oh *et al.* investigated that biochar is able to improve the abiotic reduction of pesticides and nitro explosives by reductants.²⁸ To achieve better nitrate removal efficiency, it is quite essential to study the contribution of biochar to nitrate degradation and the relation between biochar and microbes.

There is, to date, little research about the contributions of iron-based both microbes and biochar to nitrate removal. Hence, considering the defects of CWs and the effect of iron and biochar on nitrate removal, a process combining chemical reduction, microbial denitrification and CWs (RDCWs) was developed in this study to remove nitrate from low carbon/nitrogen ratio wastewater. Iron scraps can eliminate nitrate through being corroded in water to generate hydrogen as energy of autotrophic denitrifying microbes. Biochar is capable of being as the site of microbial survival and reproduction for the formation of biofilm due to its unique structure and ingredient. In addition, both iron and biochar in contact with water are prone to form numerous micro-scale galvanic cells, which can facilitate electron transfer between anodes and cathodes and then accelerate the reduction of nitrate. The coupling of chemicobiological methods and CWs, therefore, can address the problems of the low nitrate removal efficiency and the energy supply in microbial denitrification.

What is more, when known the contributions of both microbes and biochar based on iron scraps to nitrate removal, nitrate degradation can be achieved maximization and further knew mechanisms in the reaction. Moreover, the RDCWs operated in natural conditions are capable to better reflect actual nitrate removal, and their low cost and simple operation are also great advantages for large-scale application. Therefore, this study's objectives are (1) to investigate the nitrate removal performance of iron-microbes-biochar and their respective contribution to removal; (2) to reveal the mechanisms of nitrate removal by iron-microbes-biochar.

2. Materials and methods

2.1. Construction and operation of column experiments

Four replicate lab-scale RDCWs ($\Phi 100$ mm \times H700 mm, organic glass) were constructed to investigate influencing factors and their individual contribution for nitrate removal. The four experimental columns were named C₁₋₁, C₁₋₂, C₂₋₁ and C₂₋₂, respectively. C₁₋₁ and C₁₋₂ were additionally soaked in the wastewater for 40 days to make biomass enhanced while C₂₋₁ and C₂₋₂ were not soaked in wastewater. As illustrated in Fig. 1, the column was divided into three layers from top to bottom with length, and the both filling heights of top layer being close to the inlet and bottom layer near the outlet were 150 mm while filling height of middle layer was about 300 mm. The top and bottom parts of four columns were filled severally with quartz sand of 1700 g and coarse gravel of 1750 g while the middle part of C₁₋₁ and C₂₋₁ was only filled with iron scraps of 4000 g, but both iron scraps of 4000 g and biochar of 400 g (10% proportion of iron scraps weight) were regarded as the middle part of C₁₋₂ and C₂₋₂. *Phragmites australis* with a planting density of 20 stems per m² was planted in every column for simulating constructed



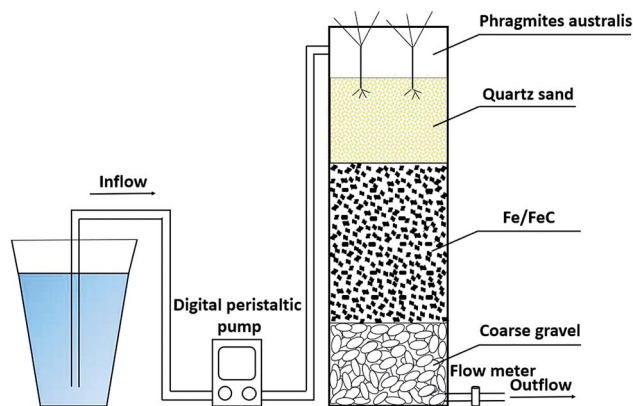


Fig. 1 Schematic diagram of operational systems.

wetland. The volume of each column was 5.5 L and liquid volume was approximately 2.8 L. All columns were fed using synthetic water in entire operation process because it was easier to control variables compared to wastewater. Digital peristaltic pump was employed to adjust the speed of influent in the water tank and flow meter was used to control the speed of effluent. Digital peristaltic pump worked with flow meter to regulate HRT in a down-flow feeding mode. Under the natural light conditions and the natural temperature ranged from 19.2 °C to 28.3 °C, four systems were continuously performed for 70 days. The performance time of 70 days was divided into three periods on the basis of different HRT, which was concretely showed in Table 1. The statistical differences of the nitrate removal efficiencies between different experimental columns were indicated through one-way ANOVA analysis.

Iron scraps with 97% purity were purchased from Shuoli Machinery Limited Company (Dezhou, China). The iron scraps were sieved through 0.85 mm square hole sieve, and their particle size was 5–10 mm. Cylindrical biochar having a diameter of 4 mm and height of 10–15 mm was obtained from Green Source Activated Carbon Co., Ltd (Pingdingshan, China). The diameter of quartz sand was 2–4 mm and the size of coarse gravel was 16–32 mm. The wastewater used to soak C_{1-1} and C_{1-2} was the effluent collected from Erlang Temple sewage treatment plant in Wuhan, China. The wastewater was used for providing primordial mixed microbes and its parameter details were showed in Table S1.† Synthetic water used in entire operation process involved 15 mg L⁻¹ NO₃⁻-N, 0.3 g L⁻¹ NaHCO₃ and 1 mL L⁻¹ microelement concentrated solution in order to supply nitrate, inorganic carbon and help microbes grow. Microelement concentrated solution consisted of: NaH₂PO₄·2H₂O: 5 g L⁻¹, CaCl₂·2H₂O:

8.18 g L⁻¹, MgSO₄·7H₂O: 1.9 g L⁻¹, CoCl₂·6H₂O: 1.61 g L⁻¹, FeSO₄·7H₂O: 1.5 g L⁻¹, H₃BO₃: 0.15 g L⁻¹, KI: 0.18 g L⁻¹, ZnSO₄·7H₂O: 0.12 g L⁻¹, MnCl₂·4H₂O: 0.12 g L⁻¹, CuSO₄·5H₂O: 0.03 g L⁻¹ and Na₂MoO₄·2H₂O: 0.06 g L⁻¹.⁶

2.2. Construction and operation of batch experiments

To reveal the mechanisms of nitrate removal in column experiments, a series of batch systems were set up and operated. Four kinds of batch systems were designed as follows: (A) 200 mL wastewater (W_C); (B) 100 g iron scraps + 200 mL wastewater (W_{Fe}); (C) 200 mL synthetic water (S_C); (D) 100 g iron scraps + 200 mL synthetic water (S_{Fe}). All batch systems were firstly performed using 250 mL Erlenmeyer flasks purged with nitrogen gas for 10 min and then sealed to achieve anoxic conditions. Afterwards, four batch systems were operated continuously for 7 days. During the whole operation process, the experimental temperature was kept at 30 ± 1 °C. These systems were prepared in duplicates to make experimental errors to be estimated.

Iron scraps used, wastewater collected and the component of synthetic water were consistent with those of column experiments. The potassium nitrate was added into the wastewater to make nitrate concentration up to 15 mg L⁻¹ and the wastewater with added potassium nitrate was ultimately used in W_C and W_{Fe} . Synthetic water was finally used in S_C and S_{Fe} .

2.3. Chemical analysis

The aqueous samples in column experiments were collected from the outlet pipes at designed time intervals and 1 mL aqueous sample in batch experiments was withdrawn every 24 h. All aqueous samples were filtered through 0.45 µm syringe membrane filters to remove a few fine particles for further analysis. The concentrations of TN, NO₃⁻-N, NO₂⁻-N, NH₄⁺-N and the COD_{cr} value were determined according to published standard methods (State Environmental Protection Administration, China). Solution dissolved oxygen was measured using a Dissolved Oxygen Meter (DO200, YSI, USA) and solution pH was monitored using a pH Meter (FE20, METTLER TOLEDO, Switzerland).

2.4. Microbial analysis

At the end of the operation of all column experiments, middle part substrate (iron scraps in C_{1-1} and C_{2-1} , both iron scraps and biochar in C_{1-2} and C_{2-2}) was respectively collected and put into 50 mL sterile centrifuge tubes. Later, 40 mL phosphate buffered saline (PBS, Hyclone, USA) was added to centrifuge tubes. After being shook vigorously, the liquid in centrifuge tubes was immediately transferred into 50 mL unused sterile centrifuge tubes. Finally, centrifuge tubes were centrifuged at 6000 rpm for 10 min to collect precipitates as microbial analysis samples.⁶ Through high-throughput sequencing, these microbial samples were analyzed and microbial DNA was extracted using the Fast DNA®SPIN Kit for Soil (MP, USA). 338F (5'-ACTCCTACGG-GAGGCAGCAG-3') and 806R (5'-GGACTACHVGGGTWTCTAAT-3') primers were used for PCR amplification using the thermocycler PCR system (GeneAmp 9700, ABI, USA). The PCR reaction

Table 1 Operational conditions of column experiments

	Influent NO ₃ ⁻ , mg N L ⁻¹	HRT, h	Operation time, d
First period	15	24	30
Second period	15	12	20
Third period	15	6	20



procedures were as follows: 3 min of denaturation at 95 °C, 27 cycles of 30 s at 95 °C, 30 s for annealing at 55 °C, and 45 s for elongation at 72 °C and a final extension at 72 °C for 10 min. The amplicons were purified and sequenced on an Illumina MiSeq platform (Illumina, San Diego, USA) according to the standard protocols by Majorbio Bio-Pharm Technology Co. Ltd. (Shanghai, China). The raw sequence reads were looked up at the NCBI Sequence Read Archive (SRA) database using the accession number: SRP213712. Operational taxonomic units (OTUs) were clustered with 97% similarity cutoff through the UPARSE (version 7.1 <http://www.drive5.com/uparse/>). The taxonomy of each 16S rRNA gene sequence was analyzed by RDP Classifier algorithm (<http://www.rdp.cme.msu.edu/>) against the Silva (SSU132) 16S rRNA database at 70% confidence threshold.

3. Results and discussion

3.1. Nitrate removal performance in column experiments

3.1.1. Effect of microbes under different HRT. To investigate the effect of microbes on the nitrate removal performance under different HRT, C₁₋₂ (soaked in wastewater) intercompared with C₂₋₂ (not soaked in wastewater) and C₁₋₁ (soaked in wastewater) intercompared with C₂₋₁ (not soaked in wastewater). As shown in Fig. 2, C₁₋₂, C₂₋₂, C₁₋₁ and C₂₋₁ operated for 70 days with three operational conditions. As far as C₁₋₂ and C₂₋₂ were concerned, different HRT resulted in distinct nitrate removal performances (Fig. 2a). When HRT was 24 h, nitrate removal efficiency in C₁₋₂ reached $97.07 \pm 1.76\%$ and was, in a great measure, higher than 95%, but in C₂₋₂, nitrate removal efficiency was just kept at $70.48 \pm 3.14\%$. Then, HRT was set as 12 h. The nitrate removal efficiency in C₁₋₂ decreased slightly while was still maintained at $85.91 \pm 3.02\%$, and nitrate removal efficiency in C₂₋₂ decreased to $51.64 \pm 2.19\%$. Finally, HRT was adjusted from 12 h to 6 h. The nitrate removal efficiency decreased much and merely reached $56.63 \pm 2.88\%$ in

C₁₋₂. Furthermore, nitrate removal efficiency was lower in C₂₋₂ than that of C₁₋₂ and only $26.39 \pm 2.55\%$.

As shown in Fig. 2b, C₁₋₁ intercompared with C₂₋₁. At 24 h HRT, C₁₋₁ achieved nitrate removal efficiency of $91.88 \pm 1.76\%$ with a majority of nitrate removal efficiency above 90% and its operation effect was extremely stable while nitrate removal efficiency of C₂₋₁ was $61.50 \pm 3.00\%$. Next, C₁₋₁ procured nitrate removal efficiency of $74.90 \pm 3.28\%$ at 12 h HRT and C₂₋₁ merely achieved $40.15 \pm 2.96\%$. Eventually, when HRT was shortened to 6 h, C₁₋₁ accomplished just nitrate removal efficiency of $46.56 \pm 3.10\%$ with a significant decline, and nitrate removal efficiency of C₂₋₁ decreased to $13.75 \pm 3.24\%$.

Compared with C₂₋₂, C₁₋₂ had a higher nitrate removal efficiency at the same level of HRT ($p < 0.05$), which was $26.59 \pm 1.91\%$ higher at 24 h HRT, $34.28 \pm 4.80\%$ higher at 12 h HRT and $30.24 \pm 2.96\%$ higher at 6 h HRT, respectively. Similarity, when HRT was 24 h, nitrate removal efficiency of C₁₋₁ was $30.39 \pm 1.91\%$ higher than that of C₂₋₁ ($p < 0.05$). With keeping HRT of 12 h, nitrate removal efficiency of C₁₋₁ was $34.75 \pm 6.02\%$ higher relative to that of C₂₋₁ ($p < 0.05$). At 6 h HRT, compared with nitrate removal efficiency of C₂₋₁, that of C₁₋₁ was $32.81 \pm 2.49\%$ higher ($p < 0.05$). From foregoing results, it could be seen that microbes had a positive effect on nitrate removal. Thus, for definitely knowing the contribution of microbes, microbes contribution rate (M) was calculated according to eqn (1).

$$M = \frac{H_1 + H_2 + H_3 + H_4 + H_5 + H_6}{6} \times 100\% \quad (1)$$

in which H_1 , H_2 and H_3 are nitrate removal efficiency of that C₁₋₂ exceeds C₂₋₂ at HRT of 24 h, 12 h and 6 h, respectively. H_4 , H_5 and H_6 are nitrate removal efficiency of that C₁₋₁ exceeds C₂₋₁ at HRT of 24 h, 12 h and 6 h, respectively. Ultimately, microbes contribution rate was calculated as $31.08 \pm 4.43\%$. In general, through the comparison between C₁₋₂ and C₂₋₂ and between C₁₋₁ and C₂₋₁, the conclusion was drawn that microbes promoted elimination of nitrate and had an individual contribution rate of $31.08 \pm 4.43\%$ for nitrate removal.


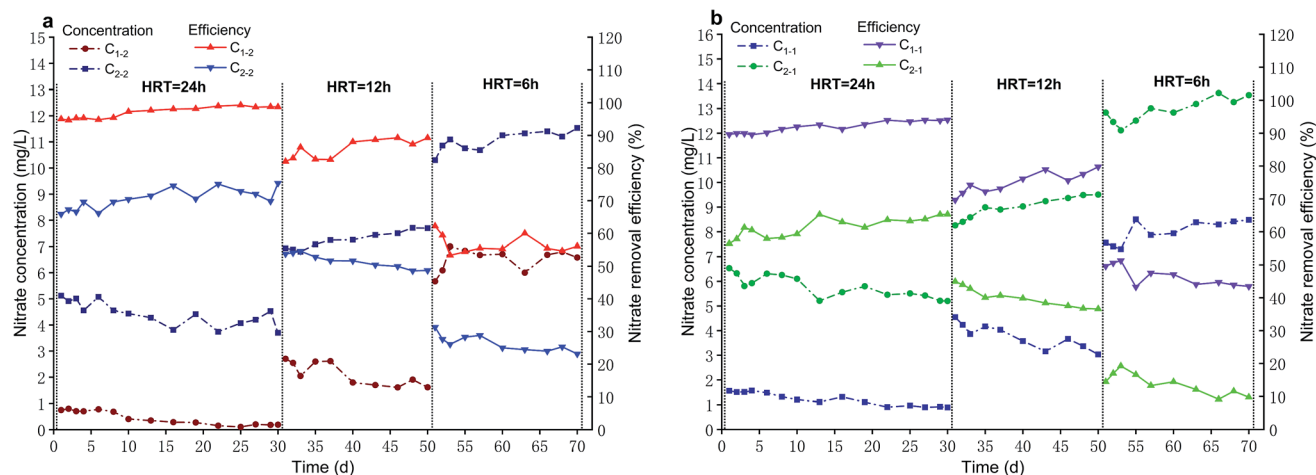


Fig. 2 Nitrate concentration and removal efficiency in column experiments. (a) Comparison between C₁₋₂ and C₂₋₂; (b) comparison between C₁₋₁ and C₂₋₁. (C₁₋₁: soaked iron scraps system, C₁₋₂: soaked both iron scraps and biochar system, C₂₋₁: not soaked iron scraps system, C₂₋₂: not soaked both iron scraps and biochar system).



3.1.2. Effect of biochar under different HRT. To explore the effect of biochar on the nitrate removal performance under different HRT, C₁₋₁ (only including iron scraps) intercompared with C₁₋₂ (including both iron scraps and biochar) and C₂₋₁ (only including iron scraps) intercompared with C₂₋₂ (including both iron scraps and biochar). As shown in Fig. 3, C₁₋₁, C₁₋₂, C₂₋₁ and C₂₋₂ operated continually for 70 days with three operational conditions. For operating effect of C₁₋₁ and C₁₋₂, it was shown in Fig. 3a that distinct nitrate removal performances were resulted from different HRT. When HRT was 24 h, nitrate removal efficiency in C₁₋₁ was $91.88 \pm 1.76\%$ with a maximum of 94.04%, but in C₁₋₂, highest nitrate removal efficiency was 99.30% and nitrate removal efficiency achieved $97.07 \pm 1.76\%$. After that, HRT was adjusted from 24 h to 12 h, nitrate removal efficiency in C₁₋₁ reduced to $74.90 \pm 3.28\%$, and nitrate removal efficiency in C₁₋₂ reduced little while was still sustained at $85.91 \pm 3.02\%$. At last HRT was set as 6 h, nitrate removal efficiency decreased much and just reached $46.56 \pm 3.10\%$ in C₁₋₁. In the meanwhile, nitrate removal efficiency in C₁₋₂ was slightly higher than that of C₁₋₁ and reached $56.63 \pm 2.88\%$.

The nitrate removal performance of C₂₋₁ intercompared with that of C₂₋₂ (Fig. 3b). C₂₋₁ procured nitrate removal efficiency of $61.50 \pm 3.00\%$ at HRT of 24 h while C₂₋₂ achieved $70.48 \pm 3.14\%$. When HRT was shortened to 12 h, nitrate removal efficiency of C₂₋₁ decreased to $40.15 \pm 2.96\%$ and C₂₋₂ reduced to $51.64 \pm 2.19\%$. In the end, at 6 h HRT, C₂₋₁ represented a significant decline, with nitrate removal efficiency of $13.75 \pm 3.24\%$ and C₂₋₂ accomplished nitrate removal efficiency of $26.39 \pm 2.55\%$.

Compared with that of C₁₋₁, C₁₋₂ had a higher nitrate removal efficiency at every level of HRT ($p < 0.05$), which was $5.19 \pm 0.64\%$ higher at 24 h HRT, $11.02 \pm 1.46\%$ higher at 12 h HRT and $10.07 \pm 3.71\%$ higher at 6 h HRT, respectively. Likewise, when HRT kept at 24 h, compared with nitrate removal efficiency of C₂₋₁, that of C₂₋₂ was $8.99 \pm 2.19\%$ higher ($p < 0.05$). Then, at 12 h HRT, nitrate removal efficiency of C₂₋₂ was $11.48 \pm 1.18\%$ higher than that of C₂₋₁ ($p < 0.05$). At last, nitrate removal efficiency of C₂₋₂ was

$12.64 \pm 2.90\%$ higher relative to that of C₂₋₁ under the condition of 6 h HRT ($p < 0.05$). From above consequences, it was noticed that biochar was beneficial to nitrate removal. Therefore, biochar contribution rate (B) was calculated according to eqn (2) to clearly know the contribution of biochar.

$$B = \frac{T_1 + T_2 + T_3 + T_4 + T_5 + T_6}{6} \times 100\% \quad (2)$$

in which T_1 , T_2 and T_3 are nitrate removal efficiency of that C₁₋₂ exceeds C₁₋₁ at HRT of 24 h, 12 h and 6 h, respectively. T_4 , T_5 and T_6 are nitrate removal efficiency of that C₂₋₂ exceeds C₂₋₁ at HRT of 24 h, 12 h and 6 h, respectively. Hence, biochar contribution rate was calculated as $9.50 \pm 3.30\%$. In a few words, these consequences presented that biochar had an enhanced effect on nitrate removal with an individual contribution rate of $9.50 \pm 3.30\%$.

3.2. Nitrate removal performance in batch experiments

3.2.1. Effect of iron scraps in the wastewater and synthetic water. Four sorts of batch systems were conducted to verify that microbes were from the wastewater and investigate the effect of iron scraps on nitrate removal performance under the conditions of whether or not microbes exist. As shown in Fig. 4, there were contrasts between W_C (wastewater control group) and W_{Fe} (wastewater experimental group) and between S_C (synthetic water control group) and S_{Fe} (synthetic water experimental group). For W_C , removal efficiencies of nitrate were basically unchanged in seven days and nitrate concentrations kept at 15 mg L^{-1} (Fig. 4a). Relatively, the nitrate removal efficiencies of W_{Fe} were very low in initial two days while subsequently showed a rapid increasing trend between Day 2 and Day 4 from $11.02 \pm 1.89\%$ to $66.34 \pm 1.33\%$ (Fig. 4a). In the following three days, nitrate removal efficiencies of W_{Fe} had a slight declining speed of rising and reached $98.22 \pm 1.99\%$ on Day 7 as the end of the experiments (Fig. 4a).

However, the operation conditions of S_{Fe} differed from that of W_{Fe} . In initial three days, nitrate removal efficiencies of S_{Fe}

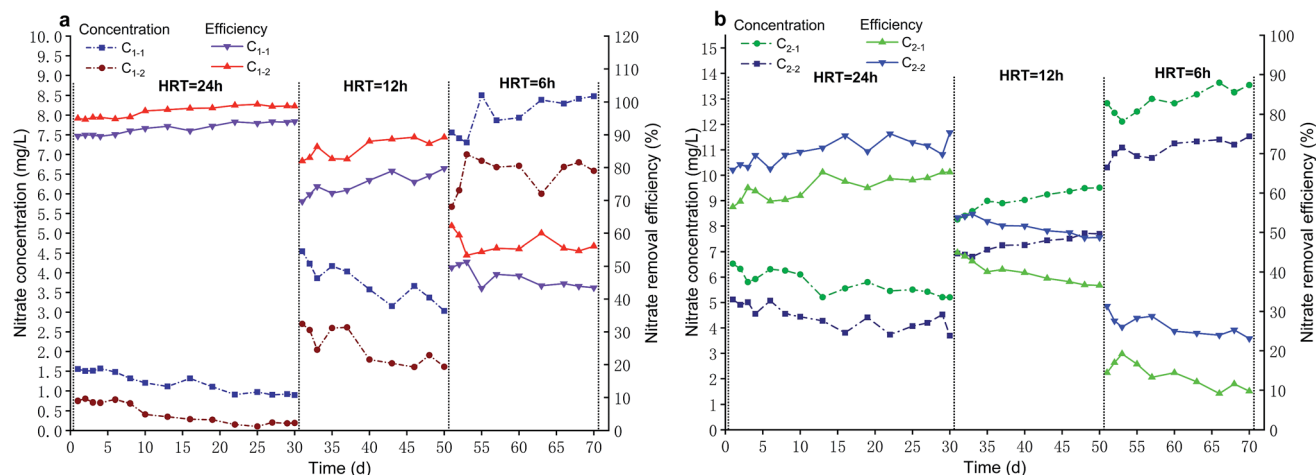


Fig. 3 Nitrate concentration and removal efficiency in column experiments. (a) Comparison between C₁₋₁ and C₁₋₂; (b) comparison between C₂₋₁ and C₂₋₂. (C₁₋₁: soaked iron scraps system, C₁₋₂: soaked both iron scraps and biochar system, C₂₋₁: not soaked iron scraps system, C₂₋₂: not soaked both iron scraps and biochar system).



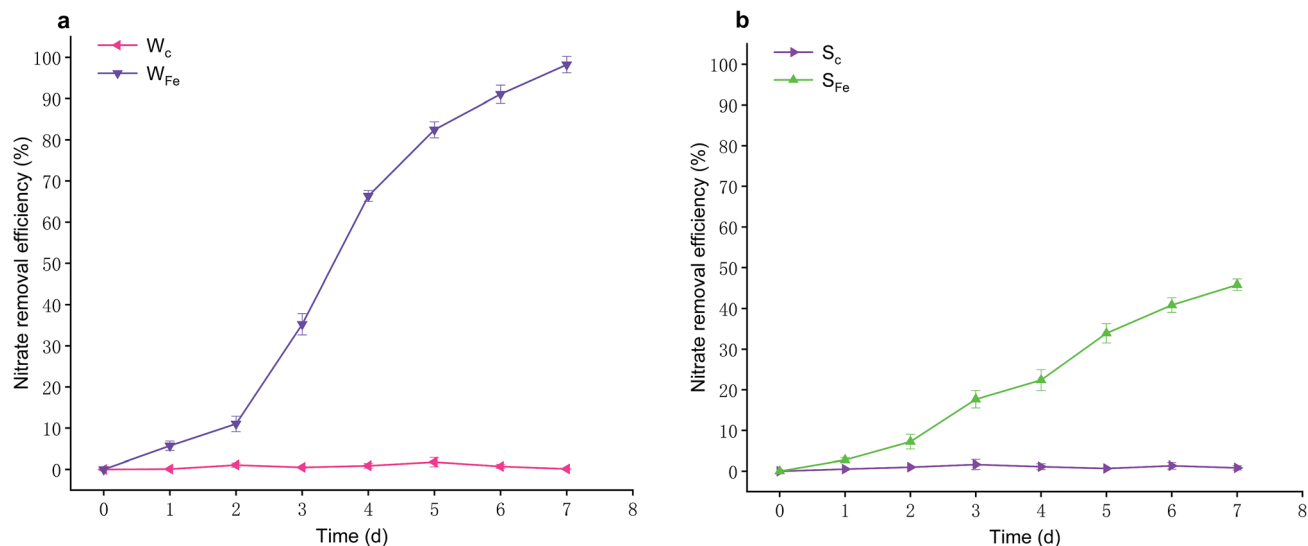


Fig. 4 Nitrate removal efficiency in batch experiments. (a) Comparison between W_C and W_{Fe} ; (b) comparison between S_C and S_{Fe} . (W_C : wastewater system, W_{Fe} : iron scraps-added wastewater system, S_C : synthetic water system, S_{Fe} : iron scraps-added synthetic water system).

sustained a growth with a gradually increasing trend, which achieved efficiency of $17.66 \pm 2.14\%$ on Day 3 (Fig. 4b), but the enhanced speed of nitrate removal efficiencies of S_{Fe} declined between Day 3 and Day 4. Afterwards, in the later three days, nitrate removal efficiencies of S_{Fe} revealed the relatively quick enhancement and eventually accomplished $45.83 \pm 1.36\%$ on Day 7 (Fig. 4b). Meanwhile, nitrate removal efficiencies of S_C changed hardly in seven days, and nitrate concentration maintained at 15 mg L^{-1} (Fig. 4b).

On account of the difference of nitrate removal efficiencies between W_{Fe} and S_{Fe} , hence, the influencing factors for nitrate removal in W_{Fe} were different from that in S_{Fe} . The nitrate removal efficiencies of S_{Fe} showed removal effect of iron scraps on nitrate. However, the reasons why the nitrate in W_{Fe} was removed were not only the presence of iron scraps but also existence of microbes, because iron scraps soaked might cause that effective microbes in wastewater propagated largely and thereby reacted with iron scraps to improve nitrate removal efficiency. In aforementioned column experiments, the system soaked in the wastewater had a better nitrate removal compared with the system not soaked. This result was accordant with that of batch experiments. Shen *et al.* found the abundances of denitrifying bacteria in column experiments increase through replacing biochar with iron scraps.²⁹ In addition, Liu *et al.* extracted bacteria attached to the iron mixtures soaked in wastewater, indicating that bacteria-supported iron scraps have a higher nitrate removal rate than iron scraps alone.⁶ Fig. 4 could be noticed that the removal efficiency of sole iron scraps was near a half of complete removal of nitrate in a week while existence of the microbes made nitrate almost totally be removed. Therefore, these consequences turned out that iron scraps and microbes had synergistic effect on nitrate removal since the abundances of microbes increased by means of iron scraps, and this was also the reason why iron scraps soaked in wastewater achieved greater nitrate removal efficiency.

3.2.2. Effect of microbes. To illustrate the influencing effect of microbes for nitrate removal explicitly, there was reaction kinetics linear fitting for removal of nitrate of W_{Fe} and S_{Fe} (Fig. 5). Moreover, the results in Fig. 5 was the reason as well why the nitrate removal of W_{Fe} was better than that of S_{Fe} . The nitrate removal followed the pseudo-first-order kinetic model. The pseudo-first-order kinetic constants represented the reaction rate of nitrate reduction. For W_{Fe} and S_{Fe} , they were 0.40789 and 0.09348 , and the corresponding nitrate removal efficiency were $98.22 \pm 1.99\%$ and $45.83 \pm 1.36\%$, respectively. The pseudo-first-order kinetic constants of W_{Fe} was 4.363 times as much as that of S_{Fe} . Zhang *et al.* used the first-order kinetic constants to get the optimal pH of that chemical oxygen demand was removed by iron-carbon.³⁰ In our previous work, the nitrate removal rate of bacteria-supported iron scraps was

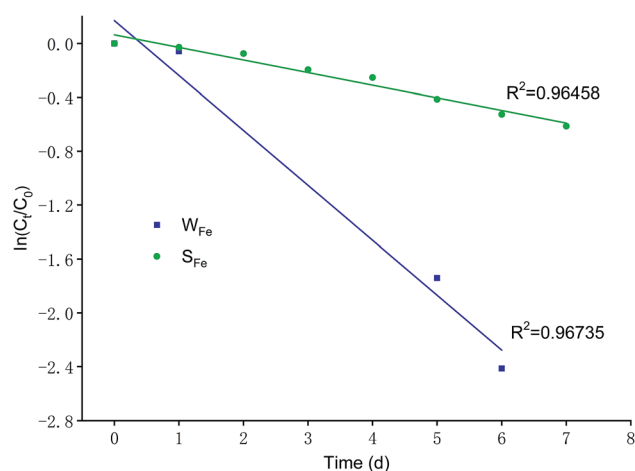


Fig. 5 Effect of microbes on nitrate removal in batch experiments. (C_0 , C_t : the initial and instant nitrate concentration, W_{Fe} : iron scraps-added wastewater system, S_{Fe} : iron scraps-added synthetic water system).

also almost twice that of iron scraps.⁶ These results indicated enriching microbes drastically improved nitrate removal and the mechanisms of experiments were also transformed from physical chemistry to physical and chemical biology.

3.3. Microbial community analysis

The microbial samples of C₁₋₁, C₁₋₂, C₂₋₁ and C₂₋₂ in column experiments were analyzed to identify what kinds of microbes probably had close correlation to nitrate removal. Fig. 6a shows the microbial community structures of each sample at the genus level, which presents the differences of four samples. Their rarefaction curves are shown in Fig. S1.† The abundance of the genus *Simplicispira* in the systems soaked in the wastewater (both C₁₋₁ and C₁₋₂) was higher than that of the systems not soaked in the wastewater (both C₂₋₁ and C₂₋₂). The relative abundance of *Simplicispira* was 13.37% in C₁₋₁ and 35.72% in C₁₋₂. On the contrary, *Simplicispira* only had the relative abundance of 0.37% in C₂₋₂ and was hardly detected in C₂₋₁. Moreover, there was a rule that the order of sizes of nitrate removal efficiencies in all systems was identical with that of sizes of relative abundance of *Simplicispira* in all systems. These results indicated that *Simplicispira* might contribute to the removal of nitrate. Besides, the relative abundance of *Methyloversatilis* in C₁₋₁ and C₁₋₂ was higher than that in C₂₋₁ and C₂₋₂. The relative abundance of *Methyloversatilis* was 3.30% and 1.44% in C₁₋₁ and C₁₋₂ while below the detection limit in C₂₋₁ and C₂₋₂. Kalyuzhaya *et al.* verified that wide-ranging organic carbon like formate and methanol can be utilized by *Methyloversatilis*,³¹ and Zhang *et al.* discovered that *Methyloversatilis* is capable to carry out heterotrophic denitrification.³² Thus, *Methyloversatilis* could live through utilizing some organic carbons from biochar and low carbon/nitrogen ratio wastewater as energy source.

The abundance of *Simplicispira* showed sharp distinction between the systems soaked in the wastewater and the systems

not soaked in the wastewater. It had close association with nitrate removal and was widely discovered in natural environments, which was reported in previous studies. In bio-electrochemical system reactor, *Simplicispira* is deemed to be hydrogen consumer and can grow with hydrogen to reduce nitrate.^{33–36} In detail, *Simplicispira* is responsible for offering electron using hydrogen while nitrate accepts electron. Of course, *Simplicispira* is not only chemolithoautotrophic but also chemoorganotrophic to survive. Zhu *et al.* and Ruan *et al.* found that *Simplicispira* can perform heterotrophic denitrification, and through utilizing poly (butylene succinate) (PBS) as carbon source, is dominant genera after finishing operation severally in airlift inner-loop sequencing batch reactor and anoxic denitrification reactor.^{37,38} Chu and Wang constructed solid-phase denitrification reactors filled with biopolymer polycaprolactone (PCL) to remove nitrate, elucidating that *Simplicispira* is major bacteria at genus levels under denitrifying conditions.³⁹ In addition, there were also some studies about survival conditions of *Simplicispira* in anaerobic situation. Lu *et al.* reported that *Simplicispira* isolated from activated sludge are capable of reducing nitrate to nitrite under anaerobic conditions.³⁴ Quan *et al.* documented the effects of aeration on microbial community, observing that aeration causes a decline of *Simplicispira* compared to the anaerobic control experiment and *Simplicispira* is able to better adapt low oxygen environment.⁴⁰ In short, these experiments show that *Simplicispira* plays an important role for nitrate removal, and can performed both hydrogenotrophic denitrification under the condition of lacking of organics and heterotrophic denitrification, with a good resistance to oxygen.

Fig. 6b shows the community heat maps of the dominant 25 genera in all microbial samples. C₂₋₁ and C₂₋₂ were clustered together, signifying that the microbial community structures of these two systems were similar. Meanwhile, microbial community structures of C₁₋₂ were different from C₁₋₁ and both C₂₋₁ and C₂₋₂,

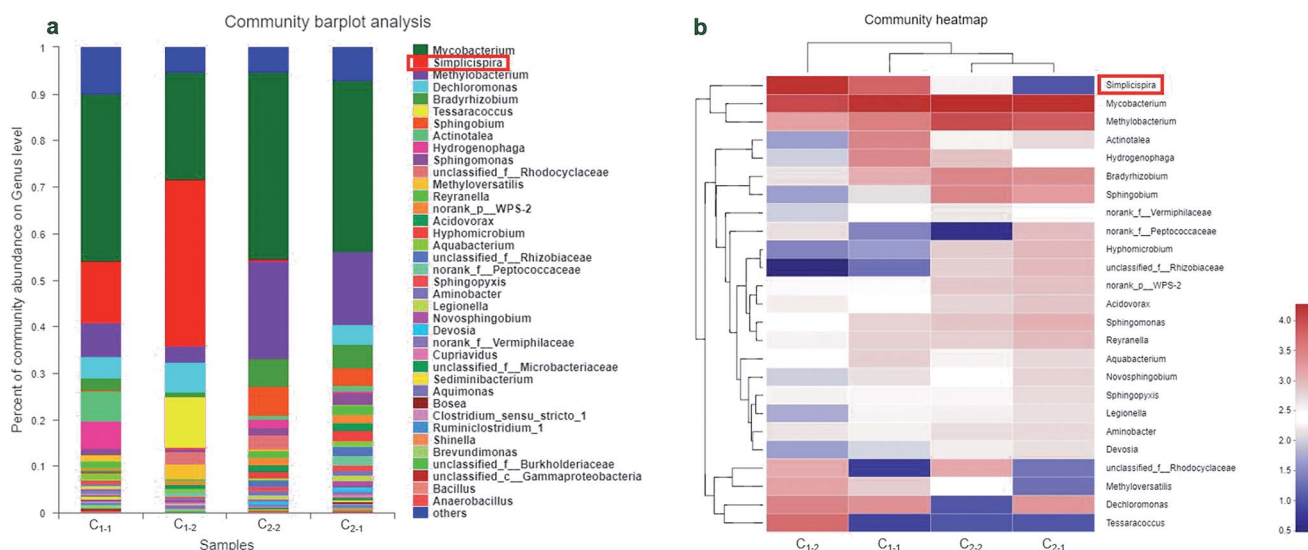


Fig. 6 Community analysis at the genus level. (a) Microbial relative abundances in genera levels; (b) microbes heat maps of the genera (only showing the most dominant 25 genera).







which revealed that the microbial community structures of the systems soaked in the wastewater differed from that not soaked in the wastewater and biochar added changed microbial community structures of the systems soaked in the wastewater, implying further that biochar affected on nitrate removal maybe owing to the change of microbial community structures, because biochar could release dissolved organic matter to enrich denitrifying bacteria.²⁹ This was also the reason why nitrate removal efficiencies of C₁₋₂ were higher than that of C₁₋₁ and that of C₂₋₂ exceeded that of C₂₋₁. Besides, the abundance of *Dechloromonas* in C₁₋₁ and C₁₋₂ was higher than that of C₂₋₁ and C₂₋₂. In contrast, the abundances of *Mycobacterium*, *Methylobacterium*, *Bradyrhizobium*, *Sphingobium* and *Acidovorax* were relatively low in C₁₋₁ and C₁₋₂ compared with C₂₋₁ and C₂₋₂.

3.4. Possible effective mechanisms for nitrate removal

In column experiments, efficiency of nitrate removal greatly promoted due to effect of microbes. Meanwhile, biochar had improvement effect on nitrate removal as well but the extent of removal was lower relative to microbes. These phenomena suggested that both microbes and biochar closely related to nitrate removal. Furthermore, in batch experiments, though iron scraps presented good effect on nitrate removal, the combination of iron scraps and microbes had higher nitrate removal efficiency in a week than iron scraps alone, which indicated that not only had iron scraps and microbes close relation with removal of nitrate but also iron scraps and microbes interrelated.

Previous studies reported that zero-valent iron alone had been used to degrade nitrate, with abiotic reaction described in eqn (3).^{6,41,42} As shown in the equation, ammonium as reductive product of nitrate is unpopular pollutant in water treatment. At the same time iron is corroded in anaerobic conditions, which is illustrated in eqn (4).^{6,43,44} In column experiments, iron locating middle layer of column was in anaerobic situation, which was beneficial to produce hydrogen. Liu *et al.* verified that *Hydrogenophaga* can carry out autotrophic denitrification using hydrogen as electron supplier and nitrate as electron acceptor, and then produces innocuous nitrogen gas.⁴⁵ Some other studies showed that *Simplicispira* can consume hydrogen and reduce nitrate to nitrite or nitrogen gas.^{33,35,36} In that way *Simplicispira* may utilize hydrogen produced by iron corroded in anaerobic conditions as energy, which reacts according to eqn (5) and (6).^{46,47} The nitrite from reductive product of nitrate temporarily accepts electron and rapidly reacts with hydrogen to produce nitrogen gas.



The relationship between biochar and microbes was close, they had a perfect cooperation to remove nitrate, which may be explained by two reasons. Primarily, biochar has porous

structures which provide large amounts of sites for microbes to conduct denitrification and shelter microbes from high fluid shear forces, leading to relatively homogeneous biofilm to improve denitrification efficiency. Subsequently, biochar can release the dissolved organic matter as carbon source to facilitate the enrichment of microbes.

In general, the RDCWs degrade nitrate from low carbon/nitrogen ratio wastewater mainly through chemical reduction and microbial denitrification. Iron and nitrate can generate chemical reaction of that iron offers electron to nitrate. Meanwhile, iron corroded in anaerobic conditions produces hydrogen as microbial energy. *Simplicispira* can consume hydrogen in the lack of organics to carry out hydrogenotrophic denitrification. Furthermore, biochar provides good resident circumstance and carbon source like dissolved organic matter for microbes, which is beneficial to microbes to remove nitrate *via* heterotrophic denitrification. However, the deficiency of the RDCWs is that ammonium, by-product reduced by nitrate, is largely accumulated. The removal methods of ammonium are no worry and ammonium can be minimized through optimizing the systems. The optimized parameters, such as iron concentration, microbes concentration, biochar concentration, pH, temperature and so on, can be adjusted according to actual removal rate of nitrate and productive rate of ammonium. It turned out that iron dosage causes finally different products⁴² and initial biomass has obvious association with by-product reduced.²¹ An increase of biochar dosage leads to higher removal efficiency of nitrate in the presence of microbes and iron but the enhancement of nitrate removal does not appear without those.²¹ The pH can determine nitrate reduction rate *via* affecting iron corrosion extent.⁴⁸ Temperature influences microbial activity and biomass and the removal of nitrate and ammonium.⁴⁹ The respective contribution of both microbes and biochar on the basis of iron to nitrate removal was clarified in column experiments, which could be as reference to adjust the several proportion of iron, microbes and biochar, resulting in optimum composition with high removal of nitrate and low production of ammonium.

4. Conclusions

The RDCWs were applied to degrade nitrate from low carbon/nitrogen ratio wastewater. This system achieved nitrate removal efficiency of $97.07 \pm 1.76\%$, $85.91 \pm 3.02\%$ and $56.63 \pm 2.88\%$ at 24 h, 12 h and 6 h HRT, respectively. Thereinto, microbes and biochar promoted removal of nitrate severally with contribution rate of $31.08 \pm 4.43\%$ and $9.50 \pm 3.30\%$. The concentration of iron, biochar and microbes could be adjusted to optimize the system in order to enhance removal efficiency of nitrate. The microbes had close relation with iron and biochar for nitrate removal. *Simplicispira* as dominative genus was likely to contribute to elimination of nitrate. Overall, RDCWs presented a potential for large-scale application to dispose nitrate pollution in low carbon/nitrogen ratio wastewater.

Conflicts of interest

There are no conflicts to declare.



Acknowledgements

This work was supported by the National Key R&D Program of China [2018YFD0900801], Natural Science Foundation of China [41907324] and Major Science and Technology Program for Water Pollution Control and Treatment (2017ZX07603-003).

References

- G. C. C. Yang and L. Hsaio-Lan, *Water Res.*, 2005, **39**, 884–894.
- T. Hosono, T. Tokunaga, A. Tsushima and J. Shimoda, *Water Res.*, 2014, **54**, 284–296.
- S. Deng, D. Li, X. Yang, S. Zhu and J. Li, *Environ. Sci. Pollut. Res. Int.*, 2016, **23**, 6621–6630.
- H. Wu, J. Zhang, R. Wei, S. Liang, C. Li and H. Xie, *Environ. Sci. Pollut. Res. Int.*, 2013, **20**, 443–451.
- H. Wu, J. Zhang, H. H. Ngo, W. Guo, Z. Hu, S. Liang, J. Fan and H. Liu, *Bioresour. Technol.*, 2015, **175**, 594–601.
- X. W. Liu, J. Xu, J. L. Huang, M. Q. Huang, T. Wang, S. P. Bao, W. Tang and T. Fang, *RSC Adv.*, 2019, **9**, 3285–3293.
- Y. Zhang, Y. Cheng, C. P. Yang, W. Luo, G. M. Zeng and L. Lu, *Bioresour. Technol.*, 2015, **193**, 424–432.
- W. C. Tang, X. Li, H. Y. Liu, S. H. Wu, Q. Zhou, C. Du, Q. Teng, Y. Y. Zhong and C. P. Yang, *Bioresour. Technol.*, 2020, **300**, 122634.
- Y. Wu, Z. Hu, L. Yang, B. Graham and P. G. Kerr, *Bioresour. Technol.*, 2011, **102**, 2419–2426.
- N. Zhu, J. Tang, C. Tang, P. Duan, L. Yao, Y. Wu and D. D. Dionysiou, *Chem. Eng. J.*, 2018, **353**, 237–245.
- H. Wu, W. Ma, Q. Kong and H. Liu, *Chem. Eng. J.*, 2018, **350**, 445–452.
- S. Wu, P. Kuschik, H. Brix, J. Vymazal and R. Dong, *Water Res.*, 2014, **57**, 40–55.
- L. Jia, R. Wang, L. Feng, X. Zhou, J. Lv and H. Wu, *Chem. Eng. J.*, 2018, **345**, 22–30.
- Y. P. Zhang, G. B. Douglas, A. H. Kaksonen, L. L. Cui and Z. F. Ye, *Sci. Total Environ.*, 2019, **646**, 1195–1203.
- B. A. Till, L. J. Weathers and P. J. J. Alvarez, *Environ. Sci. Technol.*, 1998, **32**, 634–639.
- Y. An, T. Li, Z. Jin, M. Dong, Q. Li and S. Wang, *Sci. Total Environ.*, 2009, **407**, 5465–5470.
- K. H. Shin and D. K. Cha, *Chemosphere*, 2008, **72**, 257–262.
- S. H. Deng, D. S. Li, X. Yang, W. Xing, J. L. Li and Q. Zhang, *Bioresour. Technol.*, 2016, **219**, 677–686.
- Q. H. Wu, C. M. Zheng, J. F. Zhang and F. W. Zhang, *J. Earth Sci.*, 2017, **28**, 447–456.
- A. Lavania and P. Bose, *J. Environ. Eng.*, 2006, **132**, 994–1000.
- S. Y. Oh, Y. D. Seo, B. Kim, I. Y. Kim and D. K. Cha, *Bioresour. Technol.*, 2016, **200**, 891–896.
- D. Mohan, A. Sarwat, Y. S. Ok and C. U. Pittman Jr, *Bioresour. Technol.*, 2014, **160**, 191–202.
- A. U. Rajapaksha, M. Vithanage, M. Zhang, M. Ahmad, D. Mohan, S. X. Chang and Y. S. Ok, *Bioresour. Technol.*, 2014, **166**, 303–308.
- V. A. Loganathan, Y. Feng, G. D. Sheng and T. P. Clement, *Soil Sci. Soc. Am. J.*, 2009, **73**, 967.
- I. Coelho, R. Boaventura and A. Rodrigues, *Biotechnol. Bioeng.*, 1992, **40**, 625–633.
- D. A. Beck, G. R. Johnson and G. A. Spolek, *Environ. Pollut.*, 2011, **159**, 2111–2118.
- S. H. Wu, H. J. He, X. Inthapanya, C. P. Yang, L. Lu, G. M. Zeng and Z. F. Han, *Environ. Sci. Pollut. Res.*, 2017, **24**, 16560–16577.
- S. Y. Oh and Y. D. Seo, *J. Environ. Qual.*, 2015, **44**, 833–840.
- Y. H. Shen, L. L. Zhuang, J. Zhang, J. L. Fan, T. Yang and S. Sun, *Chem. Eng. J.*, 2019, **359**, 706–712.
- W. Zhang, X. Li, Q. Yang, D. Wang, Y. Wu, X. Zhu, J. Wei, Y. Liu, L. Hou and C. Chen, *Chemosphere*, 2019, **216**, 749–756.
- M. G. Kalyuzhnaya, P. De Marco, S. Bowerman, C. C. Pacheco, J. C. Lara, M. E. Lidstrom and L. Chistoserdova, *Int. J. Syst. Evol. Microbiol.*, 2006, **56**, 2517–2522.
- L. Zhang, C. Zhang, C. Hu, H. Liu, Y. Bai and J. Qu, *Water Res.*, 2015, **85**, 422–431.
- C. Zhu, H. Wang, Q. Yan, H. Rong and G. Zhang, *Chem. Eng. J.*, 2017, **312**, 360–366.
- S. Lu, S. H. Ryu, B. S. Chung, Y. R. Chung, W. Park and C. O. Jeon, *Int. J. Syst. Evol. Microbiol.*, 2007, **57**, 31–34.
- H. Liu, Q. Yan and W. Shen, *Bioresour. Technol.*, 2014, **171**, 187–192.
- L. Chu and J. Wang, *RSC Adv.*, 2017, **7**, 53454–53462.
- S. M. Zhu, Y. L. Deng, Y. J. Ruan, X. S. Guo, M. M. Shi and J. Z. Shen, *Bioresour. Technol.*, 2015, **192**, 603–610.
- Y. J. Ruan, Y. L. Deng, X. S. Guo, M. B. Timmons, H. F. Lu, Z. Y. Han, Z. Y. Ye, M. M. Shi and S. M. Zhu, *Bioresour. Technol.*, 2016, **216**, 1004–1013.
- L. Chu and J. Wang, *Chemosphere*, 2013, **91**, 1310–1316.
- X. C. Quan, Y. P. Quan and K. Tao, *Chem. Eng. J.*, 2012, **210**, 150–156.
- M. J. Alowitz and M. M. Scherer, *Environ. Sci. Technol.*, 2002, **36**, 299–306.
- S. Comba, M. Martin, D. Marchisio, R. Sethi and E. Barberis, *Water, Air, Soil Pollut.*, 2012, **223**, 1079–1089.
- B. T. Oh, C. L. Just and P. J. J. Alvarez, *Environ. Sci. Technol.*, 2001, **35**, 4341–4346.
- X. Yu, C. Amrhein, M. A. Deshusses and M. R. Matsumoto, *Environ. Sci. Technol.*, 2006, **40**, 1328–1334.
- X. Liu, M. Huang, S. Bao, W. Tang and T. Fang, *Bioresour. Technol.*, 2020, **301**, 122731.
- M. Kurt, I. J. Dunn and J. R. Bourne, *Biotechnol. Bioeng.*, 1987, **29**, 493–501.
- S. Dadang, T. Kawanishi, N. Shimizu and Y. Hayashi, *Water Sci. Technol.*, 2002, **46**, 39–44.
- J. Kielemoes, P. De Boever and W. Verstraete, *Environ. Sci. Technol.*, 2000, **34**, 663–671.
- Q. Zhou, H. Zhu, G. Banuelos, B. Yan, Y. Liang, J. Yu and H. Li, *Int. J. Phytorem.*, 2017, **19**, 915–924.

