


 Cite this: *RSC Adv.*, 2021, 11, 24086

# The effects of temperature shock on the treatment of high-concentration organic wastewater by an Fe<sup>0</sup>/GO-anaerobic system†

 Xiangzhi Wang,<sup>a</sup>  Yecheng Lin,<sup>a</sup> Longyu Wang,<sup>a</sup> Da Yang<sup>a</sup> and Huixia Lan<sup>\*ab</sup>

In order to make up for the defects of traditional anaerobic fermentation systems, such as low energy utilization rates and the slow growth and reproduction of microorganisms, an Fe<sup>0</sup>/GO (zero-valent iron/graphene oxide) anaerobic biological treatment system was used as a treatment process in this paper, and the impact of temperature shock on the system during the treatment of high-concentration organic wastewater was studied. The experimental results showed that temperature shock reduced the COD<sub>Cr</sub> removal rate and gas production level in each system, but the Fe<sup>0</sup>/GO group maintained a higher level and had the highest COD<sub>Cr</sub> degradation rate after shocking. After temperature shock, the acetic acid content in each system was higher (above 90%), and the volatile fatty acid (VFA) content in the Fe<sup>0</sup>/GO group was the lowest. The mixed liquor suspended solids (MLSS) in all systems decreased after impact; the decrease was less in the Fe<sup>0</sup>/GO group and the increase was largest after temperature recovery. After shocking, the extracellular polymer substance (EPS) protein (PN) and polysaccharide (PS) levels in each system were both low. After temperature recovery, the PN/PS ratio of the Fe<sup>0</sup>/GO group was the highest, showing a strong impact resistance to temperature.

 Received 20th June 2021  
 Accepted 23rd June 2021

DOI: 10.1039/d1ra04773f

[rsc.li/rsc-advances](http://rsc.li/rsc-advances)

## Introduction

At present, high-concentration organic wastewater is frequently produced in daily life, *e.g.*, citric acid pickling wastewater, food wastewater, and brewing wastewater. The COD of high-concentration organic wastewater is generally above 2000 mg L<sup>-1</sup> and the composition is complex, involving a large number of aromatic compounds and heterocyclic compounds, sulfides, nitrogen compounds, heavy metals, *etc.*; this wastewater can also have strong toxicity, strong acidity, strong alkalinity, high levels of coloring, and an unpleasant smell, having a very bad impact on the surrounding environment.<sup>1</sup> Therefore, it is very necessary and urgent to improve the treatment efficacy when it comes to high-concentration organic wastewater. Treatment methods for high-concentration organic wastewater can mainly be divided into physical methods, chemical methods, and biological methods. Physical methods for treating high-concentration organic wastewater include distillation, adsorption, extraction, membrane treatment, *etc.* These methods usually transfer the organic matter in wastewater rather than decompose it. For example, adsorption methods are

widely used in wastewater treatment because of their high efficiency and low cost. However, the regeneration, modification, and treatment of the adsorbent and the post-treatment of wastewater greatly increase the overall cost of this technology. Therefore, it is generally not considered optimal to use physical methods to treat high-concentration organic wastewater. A better choice is to use other advanced technologies in conjunction with physical methods.<sup>2</sup> Chemical methods are extremely effective and stable, and methods such as advanced oxidation processes can effectively remove organic matter from high-concentration organic wastewater. However, the cost of chemical processes is prohibitive, and they also produce other waste that is hard to dispose of, such as Fe(OH)<sub>3</sub> from the Fenton oxidation process, so chemical processes need to be combined with other methods to reduce costs.<sup>3,4</sup> Biochemical methods include aerobic biological treatment technology and anaerobic biological treatment technology. Compared with aerobic biological treatment technology, anaerobic biological treatment technology has the characteristics of low energy consumption, high load resistance, and stable operation, with the abilities to generate less residual sludge and to generate the renewable energy methane.<sup>5</sup> Also, because the COD concentration of high-concentration organic wastewater is high, aerobic biological treatment technology is difficult to use; therefore, anaerobic biological treatment technology has become the mainstream technology for the treatment of high-concentration organic wastewater. The anaerobic biological treatment process can be divided into four stages, namely the hydrolysis stage,

<sup>a</sup>College of Environment and Safety Engineering of Qingdao University of Science and Technology, Qingdao, 266042, China. E-mail: lanhuixia@163.com

<sup>b</sup>Fujian Provincial Key Laboratory of Ecology-Toxicological Effects & Control for Emerging Contaminants, Putian, Fujian, 351100, China

† Electronic supplementary information (ESI) available. See DOI: 10.1039/d1ra04773f



acid generation stage, acetic acid generation stage, and methane generation stage. Methanogens can decompose acetic acid to produce methane, which plays a key role in the methanogenic stage. However, methanogens have low energy utilization rates and slow growth and reproduction rates, leading to low wastewater treatment efficiency and long treatment cycle times.<sup>6</sup> Therefore, it is necessary to improve the activities and growth rates of methanogens in order to improve the anaerobic digestion efficiency.

Temperature is a key factor affecting anaerobic biological treatment technology. A change in temperature will have a great influence on the physicochemical properties of the anaerobic sludge and the microbial community structure in the activated sludge system, which will further affect the anaerobic digestion efficiency and effluent quality. Liu *et al.* found that a low temperature of 10 °C could reduce the relative abundance of hydrolytic bacteria, decrease the removal of COD<sub>Cr</sub>, and increase the concentration of VFAs.<sup>7</sup> In high-temperature digestion, the anaerobic fermentation system is more sensitive to temperature changes. Wu *et al.* studied the influence of temperature fluctuations on the thermophilic anaerobic digestion of domestic waste and found that after a sudden drop in temperature, gas production was almost zero, volatile fatty acids rapidly accumulated, and methanogen activity decreased. Also, the longer the sudden temperature drop lasted, the longer the recovery time of the anaerobic system.<sup>8</sup> During the practical application of anaerobic biotechnology, temperature fluctuations are inevitable. *Via* adding zero-valent iron (Fe<sup>0</sup>) and graphene oxide (GO), the growth and reproduction of microorganisms can be stimulated, and the activities of related enzymes can be enhanced, thus alleviating the impact of temperature changes to a certain extent.

Compared with other iron materials, Fe<sup>0</sup> has a larger specific surface area and stronger adsorption capacity. As a cheap and green reductive active metal, Fe<sup>0</sup> can provide electrons for microorganisms in an anaerobic environment through being oxidized to Fe<sup>2+</sup> and Fe<sup>3+</sup>, thus reducing the oxidation reduction potential (ORP) of the system.<sup>9</sup> Many studies have shown that Fe<sup>0</sup> can promote the anaerobic microbial degradation process, enrich the functional microorganisms involved in the anaerobic degradation of aromatic pollutants, significantly improve the bacterial community structure, and remarkably increase both methane production in the anaerobic system and the wastewater COD<sub>Cr</sub> removal rate.<sup>10,11</sup> However, there are still problems relating to the use of Fe<sup>0</sup>. Fe<sup>0</sup> nanoparticles easily agglomerate and the specific surface area decreases after agglomeration, reducing the treatment efficiency. In addition, Fe<sup>0</sup> will undergo sedimentation after addition, resulting in the accumulation of iron powder at the bottom of the reactor, where it cannot be fully functional. *Via* combining graphene oxide (GO) with Fe<sup>0</sup>, the self-agglomeration of nano-Fe<sup>0</sup> can be effectively reduced,<sup>12</sup> thus improving the treatment efficiency.

Graphene oxide (GO) is a functionalized derivative of graphene with a large specific surface area and a layered structure, and it shows good adsorption performance toward pollutants. Compared with graphene, GO is easier to synthesize, without further reduction using hydrazine hydrate, and it is lower cost. Also, the GO surface has more abundant hydrophilic groups;

the hydrophilic groups provide a number of active sites for a variety of organic molecules, polymers, and biological molecules, raising the possibility of GO surface functionalization and offering plenty of opportunities for the application of nanocomposite materials.<sup>13</sup> As an excellent electron shuttle, GO can accelerate the electron transfer processes between anaerobic microorganisms, thus improving the activities of microorganisms and promoting the growth and reproduction of microorganisms. For example, GO can improve the interspecies electron transfer efficiency between *Geobacter metallireducens* and *Methanosarcina barkeri*.<sup>14</sup> Zhang *et al.* added GO to an anaerobic fermentation system for treating pig manure, and it significantly improved the degradation of propionic acid and was conducive to the formation of a stable acid-type fermentation microbial climax community.<sup>15</sup> When Fe<sup>0</sup> and GO are added into an anaerobic system at the same time, they can not only fully show their respective advantages, but they can also complement each other's defects, allowing pollutants to be removed more efficiently. Therefore, it is a good choice to use an Fe<sup>0</sup>/GO composite to strengthen anaerobic systems. However, in the area of the anaerobic treatment of organic wastewater, there is almost no research on the simultaneous addition of GO and Fe<sup>0</sup> to anaerobic systems.

In this paper, the anti-temperature shock performance of an Fe<sup>0</sup>/GO-anaerobic system is studied from the following aspects: (1) performance changes of the system under temperature shock; (2) variations in the volatile fatty acid (VFA) content of the system; (3) changes in the sludge concentration; and (4) the effects of temperature shock on extracellular polymers.

## Materials and methods

### Wastewater and inoculated sludge

Simulated citric acid wastewater was used in the experiments. The chemical oxygen demand based on K<sub>2</sub>Cr<sub>2</sub>O<sub>7</sub> testing (COD<sub>Cr</sub>) was about 8000 mg L<sup>-1</sup> and the pH was 4.0–5.0. Ammonium sulfate ((NH<sub>4</sub>)<sub>2</sub>SO<sub>4</sub>) and potassium dihydrogen phosphate (KH<sub>2</sub>PO<sub>4</sub>) were added as nitrogen and phosphorus sources with a COD<sub>Cr</sub> : N : P weight ratio of 200 : 5 : 1. The inoculated sludge was obtained from the an upflow anaerobic sludge bed (UASB) reactor from a brewery in Qingdao, China.

### Experimental methods

In order to reduce the cost of engineering and to seek better promotion effects, micron-grade reduced iron powder was used in the experiments in a compound with GO to obtain an Fe<sup>0</sup>/GO composite. GO was prepared *via* a modified Hummers' method.<sup>16</sup> Fe<sup>0</sup> and GO at a mass ratio of 5 : 1 (Fe<sup>0</sup>: 1.0 g and GO: 0.2 g) were placed in a 100 mL beaker, 20 mL of deionized water was added, and ultrasonic treatment was conducted for 20 min under nitrogen protection. Then, after ultrasound treatment, the material was put into a vacuum drying oven and dried at 105 °C to get the Fe<sup>0</sup>/GO composite. The amount of composite combined with deionized water was 0.06 g. The activity of the prepared Fe<sup>0</sup>/GO composite was maintained for at least 6 months in previous research, and at the end of use, the Fe<sup>0</sup>/GO composite can be easily recovered with a magnet. A scanning



electron microscopy (SEM) image of the prepared Fe<sup>0</sup>/GO material is shown in Fig. 1. In Fig. 1, GO sheets were coated with a large number of small particles. The particles were evenly dispersed, and agglomeration was not obvious, indicating that GO and Fe<sup>0</sup> were fully and evenly compounded. The average particle size of the iron powder used was 37.4 μm. The BET surface areas of Fe<sup>0</sup>, GO and the Fe<sup>0</sup>/GO composite are shown in Table 1. Compared with Fe<sup>0</sup> and GO, the BET surface area of the Fe<sup>0</sup>/GO composite is greatly increased, which was conducive to the adsorption of organic matter in the system and provided growth sites for microorganisms; this promoted the growth and reproduction of microorganisms and improved the microorganism activity, thus enhancing the wastewater treatment effects.

250 mL of inoculated sludge was added into four reactors. The four reactors were labeled as follows: blank group; GO group; Fe<sup>0</sup> group; and Fe<sup>0</sup>/GO group. 0.1 g of GO, 0.5 g of Fe<sup>0</sup>, and 0.6 g of the Fe<sup>0</sup>/GO composite were added into the GO group, Fe<sup>0</sup> group, and Fe<sup>0</sup>/GO group, respectively, with 250 mL of experimental influent. The four anaerobic reactors were put into a shaking table at a temperature of 37 °C and with a treatment cycle length of 12 h. The influent and effluent volumes from each cycle were 250 mL, and the pH of the influent was adjusted to 7.2. After a couple of cycles, the gas production levels of the four reactors were 488 mL, 496 mL, 505 mL, and 511 mL, respectively, the COD<sub>Cr</sub> removal rates were 82.7%, 85.8%, 88.9%, and 91.8%, respectively, and the MLSS levels were 8.42, 8.35, 8.66, and 8.83 g L<sup>-1</sup>, respectively. Then the temperature shock experiment was carried out.

The optimal temperature for the growth and metabolism of anaerobic fermentation bacteria is between 35 °C and 45 °C, and during actual production, the temperature of the anaerobic system will not be lower than 30 °C; some bacteria will die when the temperature is higher than 50 °C. Therefore, the low temperature and high temperature were set to be 30 °C and 50 °C in the temperature shock experiment. The temperature of the shaking table was set to 30 °C and the treatment period was 12 h; the effluent pH, gas production level, and COD<sub>Cr</sub> removal rate of each of the four reactors were measured in each cycle. At the end of the seventh cycle, PN, PS, VFA, and MLSS levels were determined.

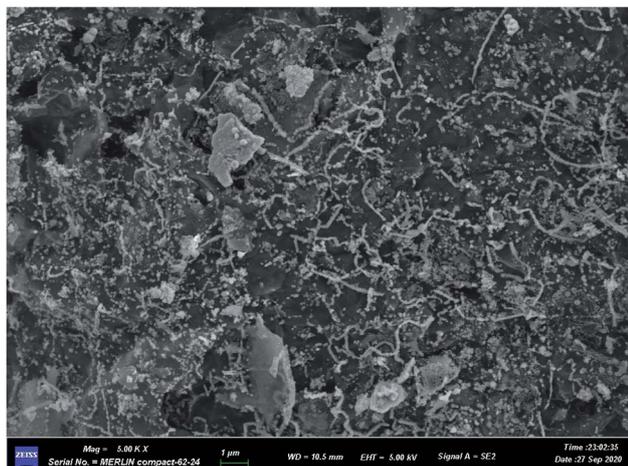


Fig. 1 An SEM image of the Fe<sup>0</sup>/GO composite.

Table 1 BET surface area data

Material	BET surface area (m <sup>2</sup> g <sup>-1</sup> )
Fe <sup>0</sup>	1.85
GO	4.89
Fe <sup>0</sup> /GO composite	16.72

Then, the shaking table temperature was restored to 37 °C, and the above steps were repeated for 7 cycles. After this, the shaking table temperature was set to 50 °C and the above steps were repeated.

### Analysis methods

pH values were determined using a pH meter (PHS-3C/501, INESA, China) with composite electrodes. COD<sub>Cr</sub> concentrations were determined using a COD analyzer (DR1010, HACH, USA). The produced gas volumes were measured *via* the drainage method.

The volatile fatty acid (VFA) levels were determined by gas chromatography (GC2014C, Shimadzu, Japan). Before determination, the supernatant in the reactor was adjusted to pH <2 using 1 mol L<sup>-1</sup> hydrochloric acid, before standing for 5 min, and then being centrifuged at 3000 rpm for 10 min; 5–10 mL of the supernatant was then absorbed with a syringe, filtered through a 0.22 μm filter membrane, and finally analyzed using a gas chromatograph. The parameters of the gas chromatograph were as follows: the detector was an ID detector; a DB-FFAP capillary column was used, the size of which was 30 m × 0.32 mm (ID) × 0.25 μm; and the capillary column flow rate was adjusted to 75 mL min<sup>-1</sup>. The samples were injected with 5 : 1 shunting, with a volume of 2 μm for each injection, and the retention time was 3.5 min. The temperatures of the inlet, detector, and cylinder were set as 220 °C, 230 °C, and 100 °C respectively.

The mixed liquor suspended solid (MLSS) levels were measured according to the national standard method.<sup>17</sup> The phenol-sulfuric acid method was used to quantify the polysaccharide (PS) content using glucose as the standard.<sup>18</sup> The protein (PN) content was determined *via* the modified Lowry method using bovine serum albumin as the standard.<sup>19</sup>

BET surface areas were measured using a surface area and porosity analyzer (ASAP2460-2, Mack Corporation, USA).

The extended uncertainty of each measurement was analyzed *via* an evaluation of uncertainty in chemical analysis measurements.<sup>20</sup> The extended uncertainty results are shown in Table 2.

Table 2 The extended uncertainty relating to the calculation results

Method of measurement	Extended uncertainty (U, k = 2)
COD	67.1 mg L <sup>-1</sup>
pH	0.03
VFA (acetic acid, propionic acid, butyric acid, valeric acid)	79.6 mg L <sup>-1</sup> , 8.1 mg L <sup>-1</sup> , 2.7 mg L <sup>-1</sup> , 0.7 mg L <sup>-1</sup>
MLSS	0.4 g L <sup>-1</sup>
EPS	5.3 mg L <sup>-1</sup>



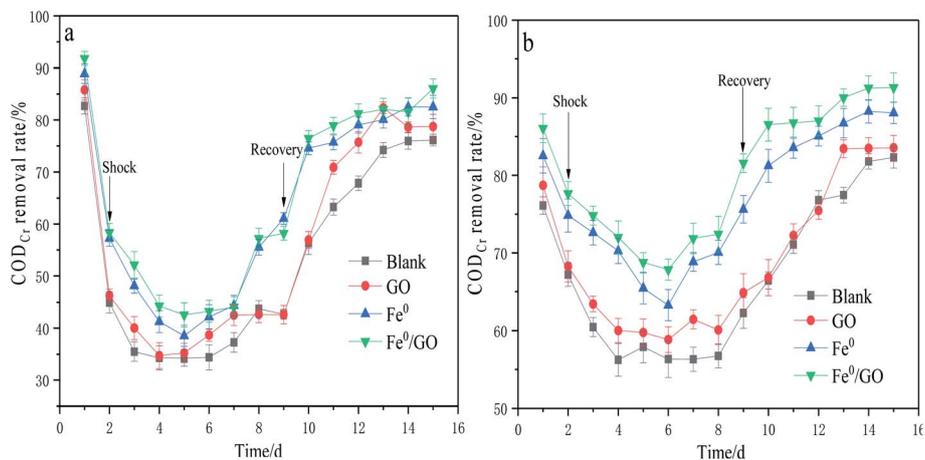


Fig. 2 The effect of temperature shock on COD<sub>Cr</sub> in effluent: (a) 30 °C and (b) 50 °C.

## Results and discussion

### Effects of temperature shock on anaerobic system performance

As can be seen from Fig. 2, the COD<sub>Cr</sub> removal rates of all the reactors decreased after temperature shock, but the degrees of impact of low temperature shock and high temperature shock on the COD<sub>Cr</sub> removal rates were different. Under the impact of low temperature, the COD<sub>Cr</sub> removal rate of each reactor decreased significantly; the blank, Fe<sup>0</sup>, and Fe<sup>0</sup>/GO groups reached their lowest points on the fourth day after impact, and the GO group reached its lowest point on the third day. The lowest COD<sub>Cr</sub> removal rates of the four groups were 34.21%, 34.71%, 38.54%, and 42.58%, respectively. After the temperature was restored, the COD<sub>Cr</sub> removal rate of each reactor increased, and the Fe<sup>0</sup>/GO group picked up faster, tended to stabilize earlier, and always maintained a high COD<sub>Cr</sub> removal rate. Under high temperature impact, the COD<sub>Cr</sub> removal rate of each reactor decreased less than in response to low temperature impact, and the lowest values were 56.23%, 60.01%, 63.28%, and 67.84%, respectively.

After temperature recovery, the change in the COD<sub>Cr</sub> removal rate of each reactor was similar to that under low temperature shock conditions. The Fe<sup>0</sup>/GO group also recovered faster, and the COD<sub>Cr</sub> removal rate after recovery reached 91.33%. It can be seen from a comparison of high temperature and low temperature impact that low temperature had a greater impact on the anaerobic system.

As can be seen from Fig. 3, following temperature shock, gas production was immediately affected. Gas production in each reactor significantly decreased and remained stable, indicating that methanogens were very sensitive to temperature changes. After temperature shock, the gas production levels of the blank, GO, Fe<sup>0</sup>, and Fe<sup>0</sup>/GO systems were about 360, 380, 400, and 410 mL, respectively. When the temperature returned to normal, the gas production of each system increased rapidly, and the gas production of the Fe<sup>0</sup>/GO system always maintained a high level, which was consistent with the results showing the COD<sub>Cr</sub> removal rate change. Following temperature shock, the activity of methanogens was inhibited, and the gas production abilities of the system were reduced, thus reducing the COD<sub>Cr</sub> removal rate. However, the gas production levels and COD<sub>Cr</sub> removal

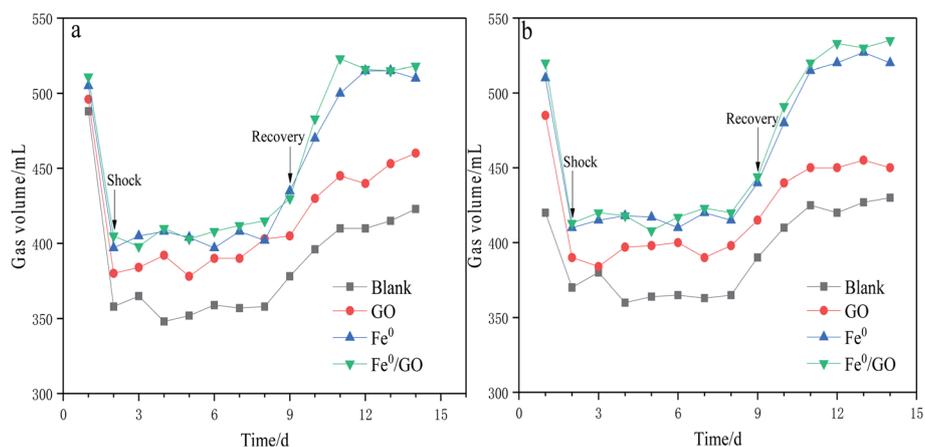


Fig. 3 The effects of temperature shock on gas volume: (a) 30 °C and (b) 50 °C.



rates of the system with the Fe<sup>0</sup>/GO composite were relatively high in response to temperature shock, and they rose quickly and tended to be stable after temperature recovery. This indicated that the addition of Fe<sup>0</sup>/GO can significantly improve the abilities of anaerobic treatment systems with high-concentration organic wastewater to resist the impacts of temperature change and enable anaerobic systems to maintain stronger performance under adverse temperatures, maintaining normal systems operation. This was undoubtedly due to the effects of Fe<sup>0</sup> and GO on the anaerobic system and their mutual assistance. GO had strong adsorption effects on organic pollutants, and the addition of Fe<sup>0</sup> can improve the activities of some coenzymes of anaerobic bacteria, which is helpful for promoting the conversion of propionate and butyrate to acetate in the stage of hydrolytic acidification.<sup>9</sup> At the same time, the addition of Fe<sup>0</sup> reduced the ORP of the system, provided good growth conditions for anaerobic microorganisms, and further improved the treatment effects in the Fe<sup>0</sup>/GO system toward high-concentration organic wastewater. Hu *et al.* used biochar, which also served as a carbon source, and iron to reinforce an UASB reactor, and found that the COD removal rate and methane production of the reactor were significantly improved and the reactor performance was enhanced.<sup>21</sup> Sun *et al.* used granular activated carbon modified with nanoscale zero-valent iron (NZVI) to enhance methane production from synthetic brewery water in an anaerobic system. They found that the COD removal rate and methane production increased by 9.38% and 14.29% in the anaerobic system with Fe-C composite particles compared with a control system.<sup>22</sup> Compared with the studies by Hu *et al.* and Sun *et al.*, Fe<sup>0</sup>/GO also had a significant promoting effect on the performance of the anaerobic system.

The degradation kinetics related to the COD<sub>Cr</sub> removal rate in each system were investigated under temperature shock conditions. As shown in Fig. 4, during temperature shock experiments, the linear relationship of each system was good and the R<sup>2</sup> values were greater than 0.9000; first-order reaction kinetics were obeyed. Based on the formula  $-\frac{d\text{COD}}{dt} = k\text{COD}$ ,

when the temperature was 30 °C, the equations describing the degradation kinetics of each system are as follows:

$$\text{Blank group : } -\frac{d\text{COD}}{dt} = 0.0655\text{COD}$$

$$\text{GO group : } -\frac{d\text{COD}}{dt} = 0.0709\text{COD}$$

$$\text{Fe}^0 \text{ group : } -\frac{d\text{COD}}{dt} = 0.0780\text{COD}$$

$$\text{Fe}^0/\text{GO group : } -\frac{d\text{COD}}{dt} = 0.0795\text{COD}$$

When the temperature was 50 °C, the equations describing the degradation kinetics of each system are as follows:

$$\text{Blank group : } -\frac{d\text{COD}}{dt} = 0.0658\text{COD}$$

$$\text{GO group : } -\frac{d\text{COD}}{dt} = 0.0700\text{COD}$$

$$\text{Fe}^0 \text{ group : } -\frac{d\text{COD}}{dt} = 0.0781\text{COD}$$

$$\text{Fe}^0/\text{GO group : } -\frac{d\text{COD}}{dt} = 0.0808\text{COD}$$

Comparing the equations describing the degradation kinetics for each system, it was found that the values of the Fe<sup>0</sup>/GO system degradation rate constant *k* (30 °C: *k* = 0.0795 h<sup>-1</sup>; 50 °C: *k* = 0.0808 h<sup>-1</sup>) were greater than every other system, which indicated that the anaerobic microorganisms within the Fe<sup>0</sup>/GO system retained high activity when subjected to

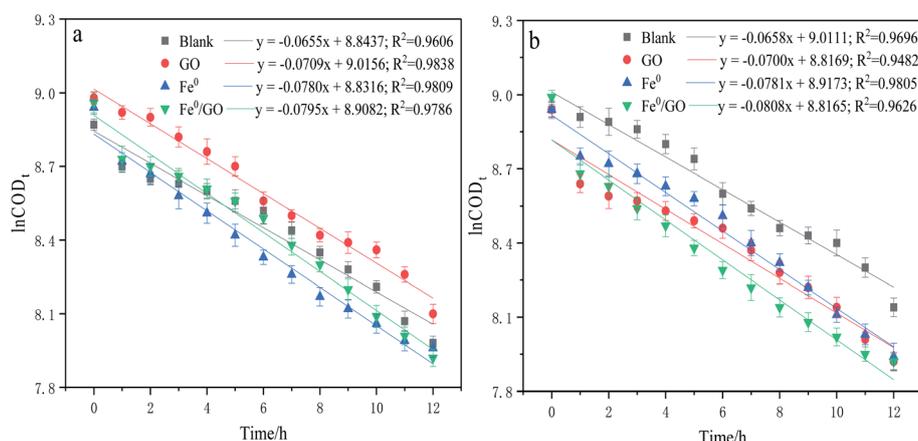


Fig. 4 Fitted first-order kinetics curves: (a) 30 °C and (b) 50 °C.



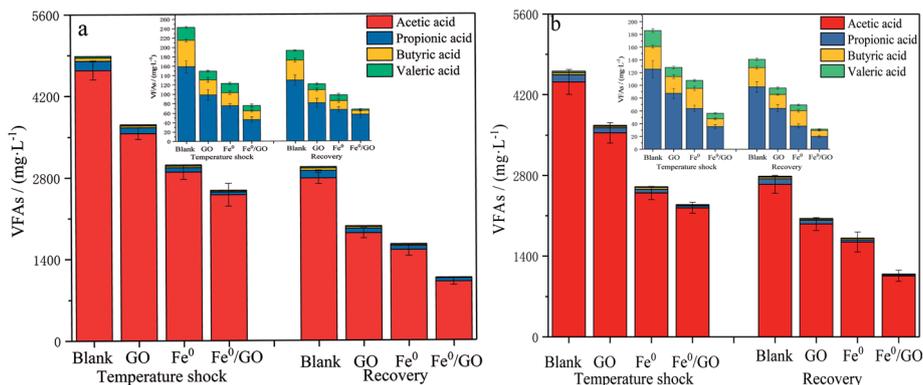


Fig. 5 The effects of temperature shock on VFA levels: (a) 30 °C and (b) 50 °C (the insets show the VFA levels without acetic acid).

temperature shock. Upon the addition of Fe<sup>0</sup>/GO, the anaerobic system had a faster degradation rate and a shorter treatment cycle than the other systems at unfavorable temperatures, which made the anaerobic system more efficient in the treatment of high-concentration organic wastewater. Therefore, the addition of Fe<sup>0</sup>/GO can improve the impact resistance abilities of anaerobic systems to temperature shock.

#### Effects of temperature shock on effluent VFA levels

As shown in Fig. 5, when the system was subjected to temperature shock, the effluent VFA content of each system was at a high level, and the effluent VFA content decreased after the temperature returned to normal. Also examining the pH changes in each system (Fig. 6), the VFA content in the blank group was the highest and the pH of the effluent was the lowest after impact. The VFA content in the Fe<sup>0</sup>/GO group was the lowest and the effluent pH was the highest. By comparing the changes in the VFA content in each system after high and low temperature shock, it was found that the impact of low temperature shock on the VFA content in each system was greater than the impact under high temperature shock. This may be because there were large numbers of mesophilic microorganisms and small numbers of thermophilic

microorganisms in the systems. Low temperature inhibited the activities of biological enzymes in the microorganisms and affected the abilities of anaerobic bacteria to degrade organic matter in wastewater; therefore, the effluent VFA content was relatively high. In the experimental process, the acetic acid content in each system always maintained a high level (above 90%), indicating that the anaerobic system involved a stable acetic-acid-type climax fermentation community under temperature shock conditions. As is shown in the comparison of various systems, from the process of temperature shock to temperature recovery, the effluent VFA content of the Fe<sup>0</sup>/GO group was significantly lower than every other group, and the effluent pH was relatively higher. Therefore, the Fe<sup>0</sup>/GO group had the strongest impact resistance to temperature. Fe<sup>0</sup>/GO can enhance the degradation of organic matter in anaerobic systems and improve the operations of anaerobic systems. This is mainly because Fe<sup>0</sup> and GO can promote electron transfer in the system. An appropriate dosage of Fe<sup>0</sup> can increase the activities of methanogens, and promote the conversion of *Methanotrix* to *Methanosarcina* (the acetic acid utilization rate of *Methanosarcina* is 3–5 times higher than that of *Methanotrix*) in the anaerobic reactor, so as to accelerate the utilization of acetic acid.<sup>23</sup> It also can promote the co-metabolism of acid-

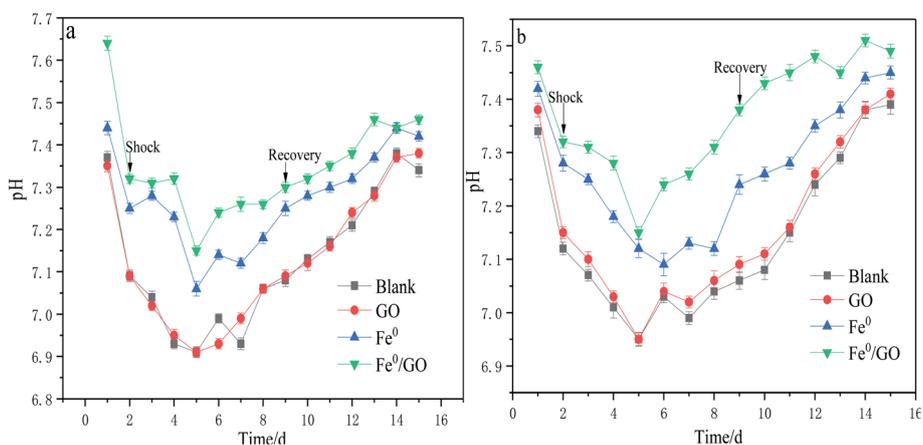


Fig. 6 The effects of temperature shock on the pH of the effluent: (a) 30 °C and (b) 50 °C.

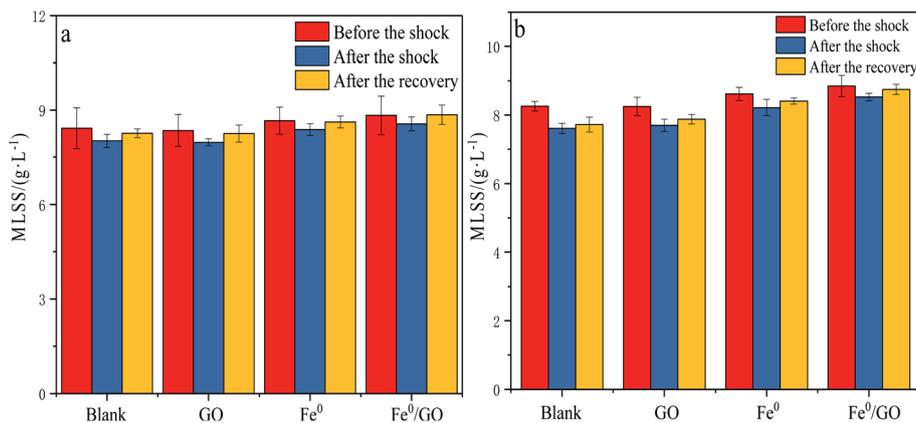


Fig. 7 The effects of temperature shock on MLSS levels: (a) 30 °C and (b) 50 °C.

producing bacteria and methanogens and reduce the accumulation of VFAs in the system,<sup>24,25</sup> thus alleviating the adverse effects of temperature shock on the anaerobic system. Meanwhile, Fe<sup>0</sup> can play a role in controlling sulfur,<sup>26</sup> as wastewater contains a certain concentration of SO<sub>4</sub><sup>2-</sup>. In the process of wastewater treatment, anaerobic microorganisms convert SO<sub>4</sub><sup>2-</sup> ions into H<sub>2</sub>S, which is easily soluble in water and reacts with the added Fe<sup>0</sup> to induce FeS precipitation, which reduces the acidity of the system and keeps the pH of the effluent at a high level. This prevented the accumulation of VFAs and the decrease of system pH during temperature shock from affecting the living environment of methanogens.

### Influence of temperature shock on system MLSS

It can be seen from Fig. 7 that the impacts of different temperature shocks on MLSS were not very different. When the system was impacted by high temperature or low temperature, the MLSS level in each system decreased, and the MLSS concentration slightly increased after the temperature was restored. After low temperature shock, the MLSS levels for each system were 8.02, 7.97, 8.38, and 8.56 g L<sup>-1</sup>, respectively. Compared with the levels before shocking, the MLSS value of the Fe<sup>0</sup>/GO group decreased slightly and remained relatively high. After the temperature was restored, the MLSS value of the Fe<sup>0</sup>/GO group reached 8.85 g L<sup>-1</sup>, which was the largest increase. After high temperature shock, the change in the MLSS value of each system was the same as that seen in response to low temperature shock. The Fe<sup>0</sup>/GO group was less affected and the MLSS value rose more after the temperature was restored. This was because Fe<sup>0</sup> and GO have a large specific surface area and strong adsorption capacity; they can adsorb organic pollutants on the surface for decomposition *via* microbial flora on the surface to provide energy, thereby accelerating the growth of anaerobic microorganisms and achieving an increase in the MLSS level. Fe<sup>0</sup> had a catalytic effect on the process of anaerobic digestion, promoted the conversion of organic substrates to biogas,<sup>27</sup> provided energy for the growth of microorganisms, and accelerated the growth of anaerobic microorganisms. Moreover, Fe<sup>0</sup> will be evenly dispersed on the

GO surface, and a large number of anaerobic microorganisms will begin to accumulate and grow on the GO surface under Fe<sup>0</sup> catalysis, which improves the flocs and microbial population structure of the sludge to a certain extent.<sup>28</sup> In temperature shock experiments, the Fe<sup>0</sup>/GO group always maintained a higher sludge concentration. Combined with various effluent indicators, it was further verified that the Fe<sup>0</sup>/GO complex can enhance the activities of anaerobic microorganisms and improve the performance of anaerobic systems. Therefore, the system can show stronger resistance to temperature shock after the addition of Fe<sup>0</sup> and GO.

### Effects of temperature shock on extracellular polymers

Extracellular polymeric substances (EPS) are a mixture of high molecular weight polymers secreted by microorganisms, which alter the physicochemical characteristics of the cellular surface, such as the charge and hydrophobicity. They are composed of proteins, polysaccharides, nucleic acids, lipids, and humic substances.<sup>29,30</sup> Proteins and polysaccharides are the main elements of EPS, making up 1–60% and 40–95% of the total EPS components, respectively.<sup>31</sup> Polysaccharides are hydrophilic polymers that reversibly absorb and exude water or biological fluids and contribute to high water retention. An increase in the bound water content of a floc results in poor settling and dewatering. Proteins, and the amino acid components of these proteins, contribute to the hydrophobic character of flocs.<sup>32</sup> An increase in the protein content will reduce the retained water in the sludge, making the sludge and water easy to separate and allowing cells to bind closely. In addition, the bonding abilities between PN and cations are greater than bonding involving PS, and a three-dimensional structure is formed to maintain the integrity and stability of sludge *via* cationic bridges.<sup>33</sup> In addition, the protein/polysaccharide ratio (PN/PS) is also an important index reflecting the flocculation performance of sludge.

As can be seen from Fig. 8, the changes in the protein and polysaccharide content levels in each system under high temperature shock and low temperature shock were basically the same. After temperature shock, the levels of protein and



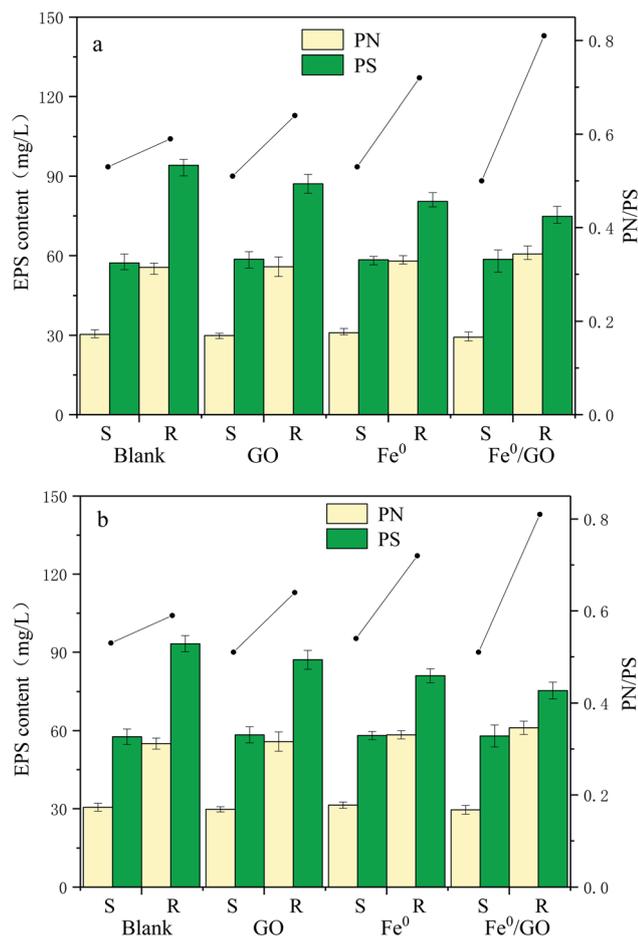


Fig. 8 The effects of temperature shock on EPS: (a) 30 °C and (b) 50 °C. (The bars show the EPS content, while the lines show the PN/PS ratio. S represents the PN and PS content levels and PN/PS ratio after temperature shock, and R represents the PN and PS content levels and PN/PS ratio after temperature recovery.)

polysaccharide in each system were low, and there were no significant differences. Polysaccharides were maintained at 50–60 mg L<sup>-1</sup> and proteins were maintained at 25–35 mg L<sup>-1</sup>. The PN/PS values of the systems were also roughly the same. After the temperature was restored, the protein and polysaccharide levels in each system increased significantly, and the total EPS level of each system was similar. The polysaccharide content was above 70 mg L<sup>-1</sup> and the protein content was above 50 mg L<sup>-1</sup>; out of all the groups, the polysaccharide content was the lowest and the protein content was the highest in the Fe<sup>0</sup>/GO group. The PN/PS ratio of the Fe<sup>0</sup>/GO group was the largest, and the PN/PS values of the Fe<sup>0</sup> group and the Fe<sup>0</sup>/GO group were significantly higher than those of the blank group and the GO group. This may be because iron ions can act as chelating agents, promoting EPS generation and allowing EPS to produce more PN.<sup>34</sup> In the experiments, the PN/PS ratio of the GO group was slightly higher than that of the blank group. Studies by Guo *et al.* also indicated that GO had little effect on the total EPS content, but it changed the composition of EPS. The PN content and PN/PS ratio increased when GO was added to aerobic

granular sludge for nitrogen removal.<sup>35</sup> The results showed that the sludge activity of each system was affected and the flocculation performance of the sludge became worse at unsuitable temperatures. In contrast, the addition of Fe<sup>0</sup>/GO did not improve the flocculation performance of anaerobic activated sludge. However, when the temperature was restored, the advantages of adding Fe<sup>0</sup>/GO to the system appeared. The PN content increased significantly, which made the PN/PS ratio rise significantly, indicating that Fe<sup>0</sup>/GO can improve the flocculation performance of the sludge at normal temperatures and enhance the integrity and stability of the sludge.

## Conclusions

An Fe<sup>0</sup>/GO complex system was less affected by temperature shock, and its COD<sub>Cr</sub> removal rate, level of gas production, and COD<sub>Cr</sub> degradation rate were better than other systems; they also rapidly improved after the temperature was restored. Moreover, its effluent VFA content was lower, there was no excessive accumulation of fatty acids, and the system pH was higher, which enabled the anaerobic reactor to operate well even under unsuitable temperature conditions. The sludge-related indices of the system, such as MLSS and extracellular polymer levels, showed little change after temperature shock, and the anaerobic microorganisms in this system had stronger activities. Therefore, the addition of an Fe<sup>0</sup>/GO composite can greatly improve the impact resistance of anaerobic systems to temperature shock, laying good foundations for the application of Fe<sup>0</sup>/GO in practical engineering.

## Conflicts of interest

There are no conflicts to declare.

## Acknowledgements

The authors are grateful to the Shandong Provincial Key Research and Development Program (SPKR&DP) (Grant no. 2019GGX102029) and the Open Fund of State Key Laboratory Base of Eco-Chemical Engineering (Grant no. KF1706).

## References

- 1 Y. Xuan, *Chem. Eng. Des. Commun.*, 2019, **45**(06), 98–99.
- 2 Z. Kong, L. Li, Y. Xue, M. Yang and Y. Li, *J. Cleaner Prod.*, 2019, **231**, 913–927.
- 3 M. G. Alalm, A. Tawfik and S. Ookawara, *J. Water. Process. Eng.*, 2015, **8**, 55–63.
- 4 A. D. Bokare and W. Choi, *J. Hazard. Mater.*, 2014, **275**, 121–135.
- 5 M. Shen, X. Hai, Y. Zheng, P. Li, Y. Li, W. Jin, D. Li, Y. Li, J. Zhao, H. Lei, H. Xiao, Y. Li, G. Yan, Z. Cao and Q. Bu, *Sci. Total Environ.*, 2019, **656**, 843–851.
- 6 Y. Yang, Y. Zhang, Z. Li, Z. Zhao, X. Quan and Z. Zhao, *J. Cleaner Prod.*, 2017, **149**(15), 1101–1108.
- 7 Z. Liu, X. Liu, T. Zhou, S. Zhang, J. Li and Q. Yang, *Environ. Sci.*, 2020, **41**(09), 4141–4149.



- 8 M. Wu and K. Sun, *Environ. Sci.*, 2006, **27**(4), 805–809.
- 9 X. Hao, J. Wei, M. C. van Loosdrecht and D. Cao, *Water Res.*, 2017, **117**, 58–67.
- 10 D. Wu, S. Zheng, A. Ding, G. Sun and M. Yang, *J. Hazard. Mater.*, 2015, **286**, 1–6.
- 11 W. Xu, H. Zhao, H. Cao, Y. Zhang, Y. Sheng, T. Li, S. Zhou and H. Li, *Bioresour. Technol.*, 2020, **300**, 122667.
- 12 P. Jiang, Y. Li, Y. Tong, J. Li, H. Lan, M. Fu and R. Liu, *Acta Sci. Circumstantiae*, 2016, **36**(07), 2443–2450.
- 13 T. S. Andrew, M. L. Anna, Z. Songshan, B. Liu and L. Sun, *Nano Mater. Sci.*, 2019, 2589–9651.
- 14 K. Igarashi, E. Miyako and S. Kato, *Front. Microbiol.*, 2020, **10**, 3068.
- 15 J. Zhang, Z. Wang, Y. Wang, H. Zhong, Q. Sui, C. Zhang and Y. Wei, *Bioresour. Technol.*, 2017, **245**, 850–859.
- 16 D. K. Becerra-Paniagua, M. Sotelo-Lerma and H. Hu, *J. Mater. Sci.: Mater. Electron.*, 2019, **30**(4), 3973–3983.
- 17 National EPA, *Monitoring methods of water and wastewater*, Environmental Scientific Publishing Company, Peking, 2002.
- 18 M. Dubois, K. A. Gilles, J. K. Hamilton, P. T. Rebers and F. Smith, *Anal. Chem.*, 1956, **28**(3), 350–356.
- 19 B. Frølund, R. Palmgren, K. Keiding and P. H. Nielsen, *Water Res.*, 1996, **30**(8), 1749–1758.
- 20 The State Bureau of Quality and Technical Supervision, *Evaluation of uncertainty in chemical analysis measurement, JJF 1135-2005*, 2005.
- 21 Y. Hu, C. Shi, H. Ma, J. Wu, T. Kobayashi and K. Xu, *J. Environ. Chem. Eng.*, 2021, **9**(4), 105603.
- 22 M. Sun, Z. Zhang, G. Liu, M. Lv and Y. Feng, *Sci. Total Environ.*, 2021, **760**, 143933.
- 23 M. Takashima and R. E. Speece, *Res. J. Water Pollut. Control Fed.*, 1989, 1645–1650.
- 24 S. Chen, A. E. Rotaru, P. M. Shrestha, N. S. Malvankar, F. Liu, W. Fan, K. P. Nevin and D. R. Lovley, *Sci. Rep.*, 2014, **4**(1), 1–7.
- 25 F. Liu, A. E. Rotaru, P. M. Shrestha, N. S. Malvankar, K. P. Nevin and D. R. Lovley, *Energy Environ. Sci.*, 2012, **5**(10), 8982–8989.
- 26 F. G. Feroso, J. Bartacek, R. Manzano, H. P. Van Leeuwen and P. N. Lens, *Bioresour. Technol.*, 2010, **101**(24), 9429–9437.
- 27 S. S. Yekta, A. Lindmark, U. Skyllberg, U. A. Danielsson and B. H. Svensson, *J. Hazard. Mater.*, 2014, **269**, 83–88.
- 28 X. Y. Liang, B. Y. Gao and S. Q. Ni, *Bioresour. Technol.*, 2017, **227**, 44–49.
- 29 Y. Ma, P. K. Yuan, Y. Wu, X. Y. Cheng, H. Meng, H. He, G. X. Wang, X. M. Chen, W. M. Xie and L. M. Zhang, *Chemosphere*, 2021, **274**, 129798.
- 30 K. Y. Show, D. J. Lee and J. H. Tay, *Appl. Biochem. Biotechnol.*, 2012, **167**(6), 1622–1640.
- 31 Y. Zhang, H. Ma, Q. Niu, R. Chen, T. Hojo and Y. Y. Li, *RSC Adv.*, 2016, **6**(114), 113289–113297.
- 32 M. Basuvaraj, J. Fein and S. N. Liss, *Water Res.*, 2015, **82**, 104–117.
- 33 B. Q. Liao, D. G. Allen, I. G. Droppo, G. G. Leppard and S. N. Liss, *Water Res.*, 2001, **35**(2), 339–350.
- 34 L. Huang, G. Liu, G. Dong, X. Wu, C. Wang and Y. Liu, *Chem. Eng. J.*, 2017, **316**, 525–533.
- 35 C. Guo, Y. Wang, Y. Luo, X. Chen, Y. Lin and X. Liu, *Ecotoxicol. Environ. Saf.*, 2018, **156**, 287–293.

