Catalysis Science & Technology



PAPER

View Article Online

View Journal | View Issue



Cite this: Catal. Sci. Technol., 2023, 13, 2038

Co_3O_4/TiO_2 catalysts studied *in situ* during the preferential oxidation of carbon monoxide: the effect of different TiO_2 polymorphs†

Thulani M. Nyathi, ¹ Mohamed I. Fadlalla, ¹ Nico Fischer, ¹ Andrew P. E. York, ¹ Ezra J. Olivier, ¹ Emma K. Gibson, ¹ Peter P. Wells ¹ and Michael Claeys ¹ **

Co₃O₄ nanoparticles were supported on different TiO₂ polymorphs, namely, rutile, anatase, and a 15:85 mixture of rutile and anatase (also known as P25), via incipient wetness impregnation. The Co₃O₄/TiO₂ catalysts were evaluated in the preferential oxidation of CO (CO-PrOx) in a H₂-rich gas environment and characterised in situ using PXRD and magnetometry. Our results show that supporting Co₃O₄ on P25 resulted in better catalytic performance, that is, a higher maximum CO conversion to CO2 of 72.7% at 200 °C was achieved than on rutile (60.7%) and anatase (51.5%). However, the degree of reduction (DoR) of Co₃O₄ to Co⁰ was highest on P25 (91.9% at 450 °C), with no CoTiO₃ detected in the spent catalyst. The DoR of Co_3O_4 was lowest on anatase (76.4%), with the presence of Ti_xO_v -encapsulated CoO_x nanoparticles and bulk CoTiO_x (13.8%) also confirmed in the spent catalyst. Relatively low amounts of CoTiO_x (8.9%) were detected in the spent rutile-supported catalyst, while a higher DoR (85.9%) was reached under reaction conditions. The Co⁰ nanoparticles formed on P25 and rutile existed in the fcc and hcp crystal phases, while only fcc Co⁰ was detected on anatase. Furthermore, undesired CH₄ formation took place over the Co⁰ present in the P25- and rutile-supported catalysts, while CH₄ was not formed over the Co⁰ on anatase possibly due to encapsulation by Ti_xO_v species. For the first time, this study revealed the influence of different TiO2 polymorphs (used as catalyst supports) on the chemical and crystal phase transformations of Co₃O₄, which in turn affect its activity and selectivity during CO-PrOx.

Received 29th September 2022, Accepted 23rd February 2023

DOI: 10.1039/d2cy01699k

rsc.li/catalysis

1. Introduction

Titanium(v) oxide (or titania, TiO_2) is a highly versatile material with applications in the manufacture of paint, paper, and plastic products as a pigmentation agent.¹ It is also used by the cosmetics industry as a sun-blocking agent in

sunscreen products.² Owing to its excellent capability to absorb sunlight, TiO_2 has found great use as a photocatalyst, for example, to produce carbon-free hydrogen (H₂) and oxygen (O₂) *via* water (H₂O) electrolysis.^{3,4} In other catalysed reactions, TiO_2 is employed as a support material that anchors active nanoparticles to minimise their growth in size (*i.e.*, sintering) and loss of chemical phase (*e.g.*, *via* reduction or oxidation).^{5–9}

Depending on the catalytic process, strong nanoparticle-support interactions (NPSI) may have a negative impact on the performance of the catalyst as the active phase can be lost through reacting with ${\rm TiO_2}$ to form Ti-containing mixed metal oxides such as titanates. 6,7,9 For example, the formation of cobalt titanates (e.g., CoTiO₃) has been observed in the Fischer-Tropsch synthesis (FTS) when operating Co/TiO₂ catalysts under high synthesis gas conversion environments because of the high ${\rm H_2O:H_2}$ partial pressure ratios realised. $^{10-12}$ In other cases, the surface of ${\rm TiO_2}$ can be partially reduced to form ${\rm Ti}_x{\rm O}_y$ species that subsequently migrate and encapsulate the reduced Co particles due to the surface energy of ${\rm TiO_2}$ (e.g., anatase: 0.44 J m⁻²) being lower than that of metallic Co (e.g., face-centred cubic (fcc) ${\rm Co^0}$: 2.6 J m⁻²). $^{13-15}$ The encapsulation can also lead to the formation of cobalt titanates. 7,10,16

^a Catalysis Institute and c*change (DSI-NRF Centre of Excellence in Catalysis), Department of Chemical Engineering, University of Cape Town, Rondebosch 7701, South Africa. E-mail: michael.claeys@uct.ac.za

^bJohnson Matthey Technology Centre, Sonning Common, Reading RG4 9NH, UK
^c Centre for High Resolution Transmission Electron Microscopy, Physics
Department, Nelson Mandela University, PO Box 77000, Gqeberha, 6031, South
Africa

^d School of Chemistry, Joseph Black Building, University of Glasgow, Glasgow G12 8QQ, UK

^e UK Catalysis Hub, Research Complex at Harwell, Rutherford Appleton Laboratory, Harwell, Oxon, OX11 0FA, UK

 $[^]f$ School of Chemistry, University of Southampton, University Road, Southampton SO17 1BI, UK

g Diamond Light Source Ltd., Harwell Science and Innovation Campus, Chilton, Didgot OX11 ODE LIK

[†] Electronic supplementary information (ESI) available. See DOI: https://doi.org/ 10.1039/d2cy01699k

There are three well reported crystal forms or polymorphs of TiO2, namely, rutile, anatase, and brookite. Rutile is the most stable of all the three polymorphs and can be produced in pure bulk form typically at high temperatures (600-800 °C) from either anatase or brookite.¹⁷ Rutile and anatase are the widely utilised forms of TiO2 in the industries/fields mentioned earlier, and the application can either involve the pure form of one of the polymorphs or a mixture of both polymorphs. Owing to their different physical properties (such as surface area and porosity) and differences in the arrangement of atoms in their respective crystal lattices, the behaviours of rutile and anatase may also differ. 1,18

For example, anatase is generally considered a better photocatalyst than rutile because of its greater charge transfer capability. 19,20 On the other hand, rutile-supported Co catalysts often exhibit a superior catalytic performance than that of their anatase-supported counterparts in the FTS. 21,22 The lower activity of anatase-supported Co catalysts may be caused by the encapsulation and/or loss of active Co via cobalt titanate formation, both of which are kinetically and thermodynamically more facile in H2O-H2 environments when anatase is used as the support. 10-12 However, some researchers have reported improved catalytic performance when a mixture of rutile and anatase is employed, which has given rise to the wide range of nano-sized rutile-anatase mixtures being applied in various catalytic processes in recent years.4,21

In this study, we have supported cobalt(11,111) oxide (Co₃O₄) nanoparticles via incipient wetness impregnation on rutile, anatase, and the commercially available mixture of rutile and anatase (at a 15:85 ratio) called "P25" (from Evonik Industries). The three supported catalysts were evaluated for activity, selectivity, and phase stability in the preferential oxidation of carbon monoxide (CO-PrOx) in a H2rich gas environment. CO-PrOx is an essential H2 'clean-up' process that helps remove the trace amounts of CO (0.5-2%) that adsorb and deactivate the Pt-containing anode catalyst of proton-exchange membrane fuel cells (PEMFCs). 23,24 Co₃O₄ is generally regarded as the most active phase of Co in the context of CO oxidation and CO-PrOx, which take place via the Mars-van Krevelen (MvK) mechanism. 25,26 Therefore, the loss of this oxide phase through reduction by the abundant H₂ (40-75%) decreases the carbon dioxide (CO₂) yield and selectivity in CO-PrOx. Moreover, the ultimate formation of Co⁰ changes the conversion pathway of CO from oxidation to hydrogenation, which produces undesired methane (CH₄).²⁷⁻³³

Our previous study reported the effect of different support materials (viz., CeO₂, ZrO₂, SiC, SiO₂, and Al₂O₃) on the performance and phase stability of Co₃O₄ nanoparticles during CO-PrOx.32 More specifically, we proposed that weak NPSI (e.g., in Co₃O₄/ZrO₂) allow for high CO₂ yields to be achieved via the MvK mechanism, which relies on the high surface reducibility (and reoxidation) of the nanoparticles. However, the weak NPSI do not help stabilise the Co₃O₄ phase against surface and bulk reduction as Co⁰ (and associated CH₄) is formed at relatively low temperatures. On the other hand, strong NPSI (e.g., in Co₃O₄/Al₂O₃) helped stabilise the cobalt oxide phase and consequently limited CH₄ formation. However, we further showed that a less reducible catalyst is less active for CO oxidation because the MvK cycle becomes kinetically hindered.

To the best of our knowledge, there has not been a study reporting the effect of different TiO2 polymorphs on the catalytic performance and phase stability of Co-based catalysts in the CO-PrOx reaction. Therefore, our current work involves the performance evaluation of Co₃O₄/TiO₂ catalysts (where TiO2 = P25, rutile, or anatase) coupled with their in situ characterisation using powder X-ray diffraction (PXRD)³⁴⁻³⁶ and magnetometry^{36,37} during CO-PrOx. For the first time, we report a dependence of the catalytic performance of Co₃O₄ on the polymorph of TiO₂ used as the support. Furthermore, our in situ studies showed that certain chemical and crystallographic phase changes of Co₃O₄ (leading to CoO, CoTiO₃, fcc and/or hcp (hexagonal close-packed) Co⁰) may also be dependent on the type of TiO₂ polymorph.

2. Experimental

2.1. Catalyst preparation

In the subsequent sections of the paper, the bare TiO₂ supports used are referred to as "P25", "rutile", and "anatase", while the Co₃O₄-loaded supports are referred to as "Co₃O₄/P25", "Co₃O₄/rutile", and "Co₃O₄/anatase".

The supported catalysts for this study were prepared via the incipient wetness impregnation of pre-calcined (300 °C) P25 (99.5% purity, Evonik Industries), rutile (99.5% purity, Merck), and anatase (99.7% purity, Merck) with an aqueous solution containing 1.2 g of Co(NO₃)₂·6H₂O (reagent grade 98% purity, Merck) for every 1 mL of deionised water. The impregnated supports were dried overnight at 60 °C under a flow of nitrogen (N2, 50 mL(NTP) min-1) and annealed for 60 min at 350 °C (heating rate: 2 °C min⁻¹) under the same gas flow at atmospheric pressure³⁸ in a glass tube (I.D.: 15 mm, length: 240 mm; Lasec SA). In the case of rutile, two impregnation steps were conducted to achieve the targeted Co₃O₄ loading of 10 wt% as this support had a low pore volume of 0.12 cm³ g⁻¹ (Table 1). The calcined material obtained after the first impregnation was used for the second impregnation.

The bare support materials as well as the fresh and spent TiO₂-supported Co₃O₄ catalysts were characterised ex situ using PXRD, scanning transmission electron microscopy coupled with electron energy loss spectroscopy (STEM-EELS), N2 physisorption, inductively coupled plasma-optical emission spectroscopy (ICP-OES), and X-ray absorption spectroscopy (XAS). The details pertaining to these ex situ techniques can be found under the section "ex situ catalyst characterisation" in the ESI.†

Table 1 Ex situ characterisation results for the fresh supported catalysts

Sample name	$d_{ ext{PXRD}}^{\ \ a} (ext{nm})$	$d_{ ext{STEM,v}}^b (ext{nm})$	$d_{ ext{STEM,n}}^{c}$ (nm)	MSSAd (m2 g-1)	v_{pore}^{d} $(\text{cm}^{3}\text{ g}^{-1})$	Relative fraction of $Co_3O_4^a$ (wt%)	Co ₃ O ₄ loading ^e (wt%)
Co ₃ O ₄ /P25	11.8 ± 0.3	14.2 ± 4.6	9.9 ± 3.7	37.0 (48.7)	0.19 (0.21)	10.3 ± 0.3	9.4
Co ₃ O ₄ /rutile	14.7 ± 0.3	15.5 ± 3.8	13.0 ± 3.3	23.7 (26.6)	0.08(0.12)	10.3 ± 0.5	9.8
Co ₃ O ₄ /anatase	9.8 ± 0.2	16.6 ± 3.9	13.3 ± 3.9	73.5 (97.6)	0.23(0.28)	8.5 ± 0.3	9.9

^a Average volume-based crystallite size and relative weight fraction (with associated errors) of Co₃O₄. ^b Average volume-based particle size and standard deviation. ^c Average number-based particle size and standard deviation. ^d Values in parentheses are for the corresponding bare support. ^e Calculated based on the concentration of Co determined using ICP-OES.

2.2. In situ catalyst characterisation and evaluation

2.2.1. Reduction studies. The reduction of the bare supports and supported Co₃O₄ catalysts (ca. 0.012 g each) was performed at atmospheric pressure under a gas flow of 50% H₂ in N₂ (1.2 mL(NTP) min⁻¹) in an in-house developed PXRD capillary-based reaction cell. 34-36 Reduction studies were also performed via conventional H2 temperatureprogrammed reduction (H2-TPR) under a flow of 5% H2 in Ar (50 mL(NTP) min⁻¹) at atmospheric pressure using a sample of approximately 0.1 g. The experimental procedures for the PXRD-based reduction and H2-TPR studies, as well as the details for the data analysis can be found under the section "in situ catalyst characterisation" in the ESI.†

2.2.2. Catalyst evaluation during CO-PrOx. The bare supports and prepared catalysts were evaluated under model/ dry CO-PrOx conditions (feed composition: 1% CO, 1% O₂, 50% H₂, and 48% N₂) at atmospheric pressure in the PXRD reaction cell mentioned earlier and in an in-house developed in situ sample magnetometer. 36,37 We note that the evaluation of the bare supports did not involve in situ characterisation as the supports were not expected to undergo (bulk) phase changes and are not ferromagnetic (also see sections 3.2.1. and 3.3.). Furthermore, the reaction gas feed did not contain H₂O and CO₂ as the effects of these gases have been reported in our previous publications. 31,32 The procedures followed for analysing the data obtained from the in situ techniques are detailed under the section "in situ catalyst characterisation" in the ESI.†

The magnetometer enables the detection of Co⁰ (with no distinction between fcc and hcp Co⁰) as it is the only ferromagnetic Co-based phase³⁹ among those that can be formed in the current study (e.g., Co₃O₄, CoO, and CoTiO₃). However, the magnetometer is highly sensitive as very small amounts of Co⁰ (ca. 0.23 mg, which is equivalent to 0.1 wt% in this study) can be detected, 30 while PXRD requires relative amounts of Co⁰ (and of the other phases, viz., Co₃O₄, CoO, and CoTiO₃) that are above 2-3 wt% for adequate detection.

The PXRD capillary reactor was loaded with approximately 0.012 g of catalyst each time, and while the magnetometry reactor was loaded with approximately 0.26 g. The reactors were heated from 50 to 450 °C at a rate of 1 °C min⁻¹ while holding the temperature at every 25 °C for 60 min. The reaction feed was flowed at 1.2 mL(NTP) min⁻¹ in the PXRDbased experiments and 25 mL(NTP) min⁻¹ in the magnetometry-based experiments to achieve a gas-hourly space velocity (GHSV) of 60 000 mL(NTP) g_{Co,O,}⁻¹ h⁻¹, which is based on the Co₃O₄ loadings determined using ICP-OES (Table 1).

The reactor effluent gas from the CO-PrOx experiments was sampled on-line every 5 min using a Varian CP-4900 micro-GC (Agilent) fitted with thermal conductivity detectors for detecting CO, O2, H2, CO2, CH4, and N2 in three different columns (see Table S1† for the identity of the columns and full set of parameters applied to achieve gas separation). The chromatographic analysis was operated using the Varian Galaxie Chromatography Data System (version 1.9.3.2). The relevant peak areas in each chromatogram were used to calculate the volumetric flow rates of each eluting gas using eqn (S1) and (S2).† The volumetric flow rates were subsequently used to calculate normalised gas outlet flow rates (eqn (S3)†), conversions/yields (eqn (S4) and (S5)†), and selectivities (eqn (S6)†). The formation of H₂O was inferred based on the results obtained using the abovementioned equations because H2O could not be analysed in the micro-GC due to its prior condensation in a cold trapping vessel.

Results and discussion

3.1. Ex situ characterisation of fresh catalysts

Various ex situ characterisation techniques (viz., PXRD, STEM-EELS, N2 physisorption, and ICP-OES) were employed to determine the physicochemical properties of the bare supports and fresh supported Co₃O₄ catalysts. As mentioned earlier, the support material "P25" contains the rutile and anatase polymorphs at a 15:85 ratio, which was confirmed using Rietveld refinement in the TOPAS 5.0 software package⁴⁰ (see results in Fig. S3 and Table S3†). Additionally, this composition is qualitatively shown in the STEM-EELS Ti map of the bare P25 support (Fig. S4†), where the method ELNES (energy loss near edge structure) was used to distinguish the areas with rutile from those with anatase.

The diffraction patterns of the fresh catalysts are shown in and those of the bare supports can be found in Fig. S5.† Despite the crystalline nature of the three supports used, most of the reflections from the Co₃O₄ phase are visible in the diffraction patterns shown in Fig. 1(b) and do not overlap with those from the support materials. The presence of CoTiO₃ was also considered (either

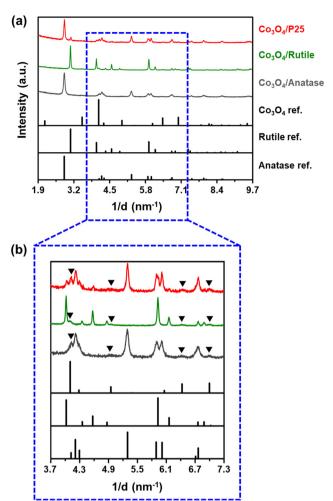


Fig. 1 (a) PXRD patterns (radiation source: Co $K\alpha 1 = 0.178897$ nm) of the fresh supported catalysts and the reference reflection lines of Co_3O_4 , rutile, and anatase as recorded in the ICDD PDF-2 database (see Table S2† for their PDF entry numbers). (b) Magnified short 1/d range of the recorded PXRD patterns for clarity of the Co_3O_4 reflections. The black triangles indicate the identified Co_3O_4 reflections in each diffraction pattern.

with a cubic or rhombohedral crystal structure) but no reflections from this phase can be observed in the acquired diffraction patterns (Fig. S6†). Based on Rietveld refinement, the average volume-based crystallite sizes of Co₃O₄ in the P25-, rutile-, and anatase-supported catalysts are 11.8 \pm 0.3 nm, 14.7 \pm 0.3 nm, and 9.8 \pm 0.2 nm, respectively, while the relative weight fractions of Co₃O₄ in each catalyst are 10.3 \pm 0.3 wt%, 10.3 \pm 0.5 wt%, and 8.5 \pm 0.3 wt%, respectively. It is worth noting that the relative weight fractions of Co₃O₄ for the P25- and rutile-supported catalysts are close to 10 wt%, which is the targeted loading in this study. The low Co₃O₄ weight fraction for the anatase-supported catalyst is likely a result of the excessive overlap of the Co₃O₄ and anatase reflections. This excessive overlap causes the Co₃O₄ reflections to be less visible, leading to a lower Co₃O₄ weight fraction being estimated using Rietveld refinement. Other Rietveld refinement results,

based on the diffraction patterns in Fig. 1 (e.g., the fitted phases and $R_{\rm wp}$ values), can be found in Fig. S7 and Table S4.†

Bright-field STEM micrographs, corresponding Co maps (generated based on the Co L-edge), and derived numberbased size distributions for each catalyst are shown in Fig. 2. The Co maps generally show a good distribution of Co_3O_4 particles over the various supports, the with some clustered particles also identifiable. For particle size analysis, only the Co-bearing entities that appear as single particles were measured to obtain numberbased size distributions as well as average number- and volume-based particle sizes (see eqn (S8)-(S11)† and the results in Table 1). The average Co₃O₄ particles sizes (on a number and volume basis) vary within a narrow range of approximately 3 nm among the three catalysts prepared, and the STEM-derived volume-based sizes are larger than the PXRD-derived volume-based sizes. This could indicate the presence of smaller Co₃O₄ crystalline domains (detected using PXRD) that constitute the larger particles identified using STEM-EELS.41

The BET (Brunauer–Emmett–Teller) surface areas and BJH (Barrett–Joyner–Halenda) pore volumes of the bare and Co_3O_4 -loaded supports are shown in Table 1. The surface areas and pore volumes of the supports decrease after supporting Co_3O_4 , which is often observed with supported catalysts prepared using incipient wetness impregnation (as in the current study). The decrease in the pore volume may indicate the presence of (most of the) Co_3O_4 particles in the pores of each support. The ICP-OES-derived Co loading (in the form of Co_3O_4) in each catalyst is close to the targeted 10 wt% loading and in agreement with the Co_3O_4 relative weight fractions calculated using Rietveld refinement, especially for $\text{Co}_3\text{O}_4/\text{P25}$ and $\text{Co}_3\text{O}_4/\text{rutile}$ (Table 1).

3.2. In situ reduction studies

3.2.1. PXRD-based reduction. The reducibility of the fresh ${\rm TiO_2}$ -supported catalysts was studied under a flow of 50% ${\rm H_2}$ in ${\rm N_2}$ at atmospheric pressure between 50 and 450 °C. This was coupled with *in situ* PXRD measurements taken every 5 min (or every 5 °C) throughout each experiment. The recorded diffraction patterns are plotted in Fig. 3(a) and 4(a) as a function of temperature but showing the on-top view of the diffractions patterns to allow for better visualisation of the appearing and disappearing reflections. Rietveld refinement was applied to calculate the relative weight fraction (Fig. 3(b) and 4(b)) and average crystallite size (Fig. 3(c) and 4(c)) of each Co-based phase formed. The weight fractions reported are on a Co basis, that is, the weight fraction of the support is not reported in each case.

It can be observed that the $\mathrm{Co_3O_4}$ crystallites supported on P25 and rutile reduce to CoO at 205 °C, while on anatase, this reduction step is first observed at 230 °C. Based on Rietveld refinement, the starting $\mathrm{Co_3O_4}$ crystallites supported on anatase have a smaller size than those supported on rutile

Paper

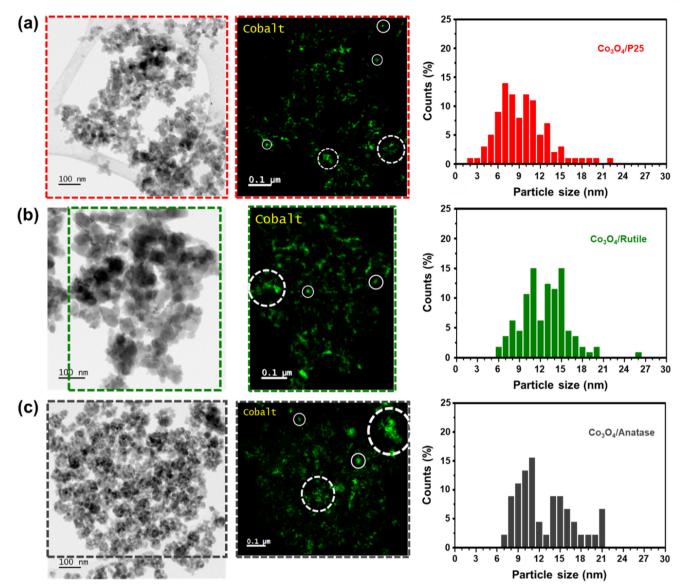


Fig. 2 (Left) Selected bright-field STEM micrographs of the fresh catalysts (a) Co₃O₄/P25, (b) Co₃O₄/rutile, and (c) Co₃O₄/anatase. (Middle) Corresponding STEM-EELS Co maps (generated based on the Co L-edge) showing the location of Co-bearing particles/clusters. (Right) Derived number-based size distributions. The solid white circles in the Co maps indicate the "single" Co-bearing particles and the dashed white circles indicate "clusters" of Co-bearing particles.

and P25 (Table 1 as well as Fig. 3(c) and 4(c)), which might explain their delayed reduction. 43-45 This may be further enhanced by the existence of stronger NPSI between Co3O4 and anatase. 7,10,16,21,22 In general, the CoO crystallites formed are either similar (in the case of Co3O4/anatase) or smaller than the starting Co₃O₄ crystallites (as in the case of Co₃O₄/ P25 and Co₃O₄/rutile), which indicates minimal or no sintering. The CoO crystallites supported on rutile reduce at 285 °C to fcc Co⁰ only, while the CoO crystallites on P25 and anatase reduce later at 305 °C to fcc and hcp Co⁰ (also see Fig. S8† for further evidence of hcp Co⁰ formation).

The formation of fcc Co⁰ only or both fcc and hcp Co⁰ during the reduction of cobalt oxides is common and may be influenced by the starting crystallite size (or size distribution) of cobalt oxide among other things.46 Pure hcp Co0 is thermodynamically stable above 20 nm, while fcc Co⁰ is stable below 20 nm. 47,48 In this study, the metallic crystallites formed on P25 and anatase are generally smaller than 20 nm (Fig. 3(c) and 4(c)), with the size of hcp Co^0 (<5 nm) being smaller than that of fcc Co⁰. It can also be seen that the fcc Co⁰ crystallites are larger than the starting Co₃O₄ crystallites, especially on the anatase support. There is a possibility that the metallic crystallites on P25 and anatase are composed of (partially) intergrown domains of fcc and hcp Co⁰, which may help stabilise the small hcp Co⁰ crystallites. Although the existence of intergrowth could not be confirmed using Rietveld refinement, this has been reported as a possible phenomenon by other researchers. 31,46,49

We note that there is some degree of scatter in the Rietveld refinement data obtained for the co-existing fcc

Co₃O₄/P25

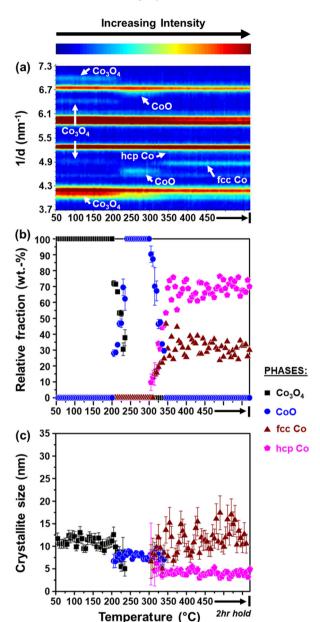


Fig. 3 (a) On-top view of the in situ PXRD patterns (X-ray source: Mo $K\alpha 1 = 0.07093$ nm) recorded during the reduction of $Co_3O_4/P25$ (gas composition: 50% H₂ and 50% N₂; pressure: atmospheric; GHSV: 60 000 mL(NTP) $g_{\text{Co}_3\text{O}_4}^{-1}$ h^{-1}). (b) Relative weight fractions (with error bars) and (c) average crystallite sizes (with error bars) of the different Co-based phases detected (excluding the support).

and hcp Co⁰ crystallites on P25 (Fig. 3(a) and (b)) and anatase (Fig. 4(a) and (b), right). This might be due to the inability to account for the possible (partial) intergrowth of the two Co⁰ allotropes.³¹ Furthermore, there is extensive overlap between the PXRD reflections of anatase, rutile (in P25), as well as fcc and hcp Co⁰, which could also contribute to the scatter in the data. Nonetheless, for the P25- and anatase-supported catalysts, the relative fraction of hcp Co⁰ is higher than that of fcc Co⁰, with both catalysts exhibiting similar average hcp: fcc Co⁰ ratios at 450 °C (i.e., 2.3 for Co₃O₄/P25 and 1.8 for Co₃O₄/anatase).

3.2.2. Conventional H₂-TPR. H₂-TPR experiments were also performed to study the reduction behaviour of the prepared catalysts and bare supports between 60 and 920 °C, and the results obtained are presented in Fig. 5(a). The Co₃O₄ particles supported on P25 and rutile start reducing at a temperature (180 °C) than the supported on anatase (260 °C). This reduction trend is in line with the observations made during the PXRD-based reduction studies despite the differences in onset temperatures, which may be caused by the different experimental conditions applied (e.g., different heating rates and concentrations of H2 - see the section "in situ catalyst characterisation" in the ESI†).

The reduction profile of each catalyst displays multiple peaks between 200 and 660 °C, with some of the peaks appearing as broad and convoluted. Nonetheless, the P25- and rutile-supported catalysts may have undergone a stepwise reduction where Co₃O₄ first reduces to CoO, and then CoO reduces to Co⁰.5,8,45,50</sup> The peak maxima at 270 °C for Co₃O₄/rutile and 280 °C for Co₃O₄/P25 may be assigned to the formation of CoO. The temperature ranges of 300-540 °C Co₃O₄/rutile and 320-450 °C for Co₃O₄/P25 possibly represent the reduction to Co⁰. However, the broad and convoluted nature of the reduction peaks in these temperature ranges may also suggest other contributing factors, such as particle size (or size distribution). In other words, different size CoO particles may be reducing at different temperatures, with larger particles reducing earlier. 28,43,44 It is also possible that some smaller Co₃O₄ particles reduce within the abovementioned temperature ranges, and not below 300 °C.

The reduction profile of Co₃O₄/anatase displays a small peak maximum at 300 °C possibly due to the reduction of a small amount of large Co₃O₄ particles. Between 330 and 490 °C, Co₃O₄/anatase also exhibits a broad reduction peak, which may be assigned to the reduction of relatively smaller Co₃O₄ particles to form metallic Co.21,22 There may be some other CoO_x or Co_xTi_yO_z species reducing between 500 and 660 °C (Fig. 5(a) and S9†) due to the existence of strong NPSI in this catalyst. The in situ formation of Co_xTi_yO_z could have been facilitated by the partial surface reduction of anatase, followed by the migration and reaction of Ti_xO_y with CoO_x species.^{7,10,16} Fig. 5(b) shows a partial reduction of the bare anatase support (possibly occurring in two steps) between 220 and 730 °C as well as 730 and 920 °C, unlike the bare P25 and rutile supports. However, the H₂ consumption of the bare anatase is almost negligible when compared with that of the supported Co₃O₄ catalysts (Fig. 5(a)). The degree of reduction (DoR) to Co⁰ of each supported Co₃O₄ catalyst was calculated using eqn (S12)-(S14)† and the results are presented in Table 2. The DoR trend is as follows: $Co_3O_4/P25$ (92.5%) > $Co_3O_4/rutile$ (90.3%) > $Co_3O_4/rutile$ anatase (85.5%), which suggests a higher proportion of unreduced Co-based oxides on the anatase support, likely due to the existence of strong NPSI.

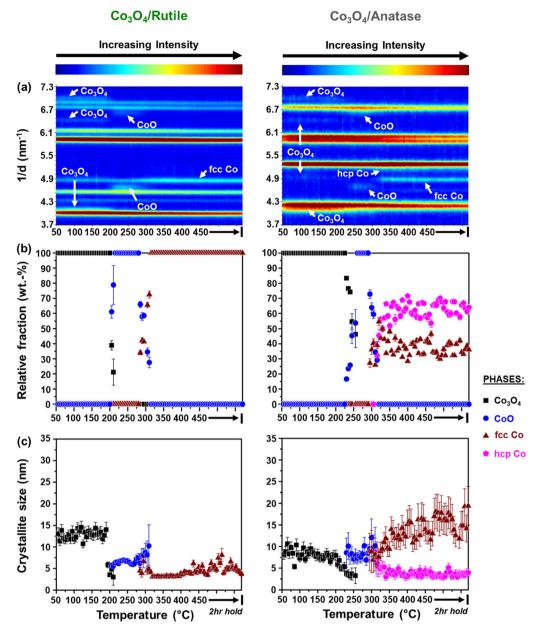


Fig. 4 (a) On-top view of the *in situ* PXRD patterns (X-ray source: Mo Kα1 = 0.07093 nm) recorded during the reduction of (left) Co₃O₄/rutile and (right) Co₃O₄/anatase (gas composition: 50% H₂ and 50% N₂; pressure: atmospheric; GHSV: 60 000 mL(NTP) $g_{\text{Co}_3\text{O}_4}^{-1}$ h⁻¹). (b) Relative weight fractions (with error bars) and (c) average crystallite sizes (with error bars) of the different Co-based phases detected (excluding the supports).

3.3. In situ catalyst characterisation and evaluation

The activity and selectivity of the TiO_2 -supported catalysts were evaluated under model/dry CO-PrOx conditions, which involved co-feeding 1% CO, 1% O_2 , 50% H_2 , and 48% N_2 at a GHSV of 60 000 mL(NTP) $g_{Co_3O_4}^{-1}$ h^{-1} . The temperature was varied stepwise between 50 and 450 °C at atmospheric pressure while analysing the reactor effluent gas using online gas chromatography. Furthermore, the catalysts were characterised *in situ* using PXRD and magnetometry to monitor their chemical and crystallographic phase changes. Fig. 6(a) and 7(a) show the calculated relative weight fractions of the Co-based crystalline phases detected using PXRD, and

Fig. 6(b) and 7(b) show the crystallite sizes of the detected phases as a function of temperature for all three catalysts. The recorded diffraction patterns are plotted in Fig. S10.† Fig. 6(c) and 7(c) display the normalised gas outlet flow rates of CO, O₂, CO₂, and CH₄; while Fig. 8(a)–(c) display a summary of the CO conversion to CO₂ ($X_{\rm CO-CO_2}$), O₂ selectivity to CO₂ ($S_{\rm O_2-CO_2}$), and CO conversion to CH₄ ($X_{\rm CO-CH_4}$), respectively. The magnetometry-derived DoR of CO₃O₄ to Co⁰ is plotted in Fig. 6(d), 7(d), and 8(d) for all evaluated catalysts. The DoR was calculated using eqn (S15),† which is based on an instrument calibration curve (Fig. S2†). The $X_{\rm CO-CO_2}$ and $X_{\rm CO-CH_4}$ values for the bare TiO₂ supports can be found in Fig. S11.†

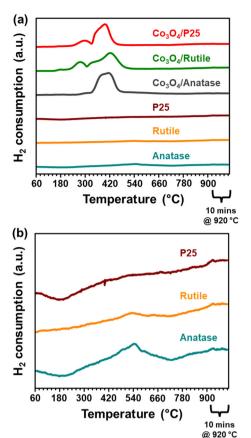


Fig. 5 Reduction profiles of the (a) Co₃O₄-loaded and bare TiO₂ support materials derived from H2-TPR performed in a 5:95 H2:Ar mixture at atmospheric pressure. (b) A re-plot of the reduction profiles of the bare support materials.

Table 2 Degree of reduction of each supported catalyst after H₂-TPR

Sample name	DoR (%)
Co ₃ O ₄ /P25	92.5
Co ₃ O ₄ /rutile	90.3
Co ₃ O ₄ /anatase	85.3

Below 200 °C, the normalised outlet flow rates of CO and O2 decrease while the outlet flow of CO2 increases with increasing temperature, which confirms the oxidation of CO to CO2 over all three catalysts. However, at 200 °C, the outlet flow of CO reaches a minimum (correspondingly, the $X_{\text{CO} \to \text{CO}}$ reaches a maximum (Fig. 8(a))), while the outlet flow of O2 continues to decrease until reaching zero at 225 °C for Co₃O₄/P25 (Fig. 6(c)) and 250 °C for Co₃O₄/rutile and Co₃O₄/ anatase (Fig. 7(c)). According to eqn (1), half a mole of O_2 is required to convert one mole of CO to one mole of CO2. In the current experiments, a 1:1 CO:O₂ feed ratio was used, implying that the conversion of O₂ should ideally be half of the conversion of CO. However, the continued decrease in the outlet flow of O2 suggests the simultaneous occurrence of H₂ oxidation (eqn (2)), which is a well-known competing reaction in CO-PrOx. 23,24,27-33 This is also confirmed by the $S_{O_2 \to CO_2}$, which is below 100% from 75 °C for all three

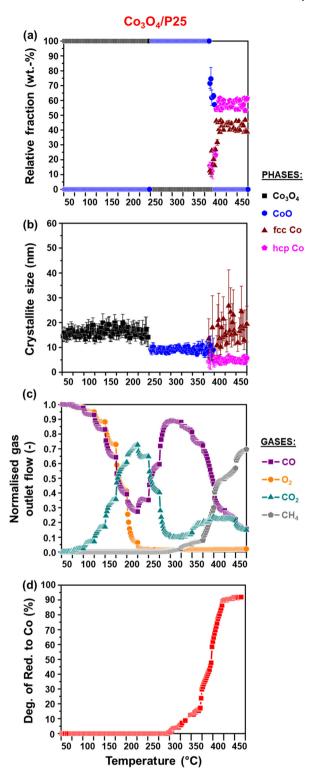


Fig. 6 (a) Relative weight fractions and (b) average crystallite sizes of the different Co-based phases detected using PXRD (excluding the support). (c) Normalised outlet flow rates of CO, O2, CO2, and CH4. (d) Magnetometry-derived DoR of Co₃O₄ to Co⁰ obtained for Co₃O₄/P25 during CO-PrOx (gas composition: 1% CO, 1% O2, 50% H2, and 48% N_2 ; pressure: atmospheric; GHSV: 60 000 mL(NTP) $g_{Co_xO_4}^{-1} h^{-1}$).

catalysts and continues to decrease as the reaction temperature is increased (Fig. 8(b)).

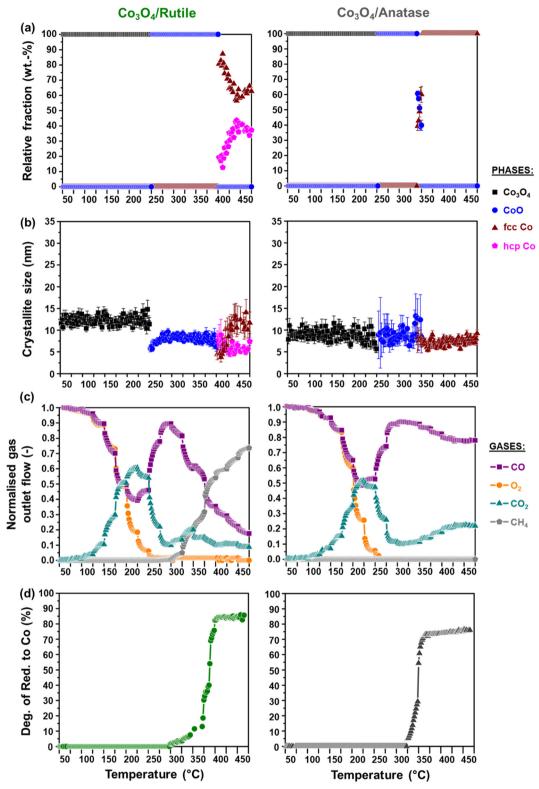


Fig. 7 (a) Relative weight fractions and (b) average crystallite sizes of the different Co-based phases detected using PXRD (excluding the supports). (c) Normalised outlet flow rates of CO, O₂, CO₂, and CH₄. (d) Magnetometry-derived DoR of Co₃O₄ to Co⁰ obtained for (left) Co₃O₄/rutile and (right) Co₃O₄/anatase during CO-PrOx (gas composition: 1% CO, 1% O₂, 50% H₂, and 48% N₂; pressure: atmospheric; GHSV: 60 000 mL(NTP) $g_{Co_3O_4}^{-1} h^{-1}$).

$$CO(g) + 1/2O_2(g) \rightarrow CO_2(g)$$
 $\Delta H_{298.15K}^{\circ} = -283.0 \text{ kJ mol}^{-1}$ (1) $H_2(g) + 1/2O_2(g) \rightarrow H_2O(g)$ $\Delta H_{298.15K}^{\circ} = -241.9 \text{ kJ mol}^{-1}$ (2)

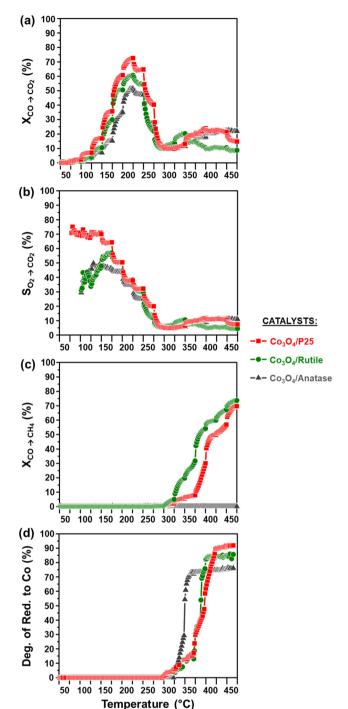


Fig. 8 (a) CO conversion to CO_2 ($X_{CO \rightarrow CO_2}$), (b) O_2 selectivity to CO_2 $(S_{O_2 \to CO_2})$, (c) CO conversion to CH₄ $(X_{CO \to CH_4})$, and (d) magnetometryderived DoR of Co₃O₄ to Co⁰ during CO-PrOx for all prepared catalysts. The $S_{O_3 \rightarrow CO_3}$ was calculated at temperatures where both CO and O_2 were converted (see Fig. 6(c), 7(c), and 8(a)). (Gas composition: 1% CO, 1% O₂, 50% H_2 , and 48% N_2 ; pressure: atmospheric; GHSV: 60 000 mL(NTP) $g_{Co_3O_4}^{-1}h^{-1}$).

A comparison of the CO oxidation activities of the evaluated catalysts shows that Co₃O₄/P25 is the most active catalyst over a wide temperature range (50 and 275 °C) and reaches a maximum $X_{\text{CO}\rightarrow\text{CO}_2}$ of 72.7% at 200 °C, followed by $\text{Co}_3\text{O}_4/$ rutile (60.7%) and Co₃O₄/anatase (51.5%) at the same temperature. The Co₃O₄/P25 catalyst also exhibits better $S_{O_3 \to CO_3}$ values between 50 and 275 °C than the rutile- and anatase-supported catalysts. Although the catalysts do not reach the desired minimum $X_{\text{CO}\rightarrow\text{CO}_3}$ of 99.9% (i.e., decreasing the concentration of CO below 10 ppm), 23,24 P25 may still be a viable support for future catalyst development work in the context of CO-PrOx. This support composes of a mixture of rutile (15%) and anatase (85%), which has improved the activity of catalysts used in other catalytic processes.²¹ The mixture of rutile and anatase is thought to result in relatively weaker interactions with Co₃O₄ nanoparticles, making them easier to reduce. 21,22 Therefore, assuming the MvK mechanism for CO oxidation, which involves a surface reduction-oxidation (redox) cycle being undergone by Co₃O₄, ^{25,26} the higher activity of Co₃O₄/P25 may be due to the existence of weak NPSI that allow for an effective surface redox cycle.

Fig. S11(a)† shows the $X_{\text{CO}\rightarrow\text{CO}_2}$ values plotted as a function of temperature for the three bare supports. It can be seen that the bare supports also exhibit some CO oxidation activity, with $X_{\text{CO}\rightarrow\text{CO}_3}$ values that are below 10%. However, the Co_3O_4 -loaded supports display much higher $X_{CO \rightarrow CO_2}$ values than those of the bare supports, which emphasises the importance of the Co₃O₄ phase. There may be contributions to the CO oxidation activity from each support, but this can be expected to be minor.

Based on the in situ PXRD measurements performed (Fig. 6, 7, and S10†), the Co₃O₄ phase is stable between 50 and 225 °C in all three catalysts, which explains the overall increase in the $X_{CO \to CO_2}$ values within this temperature range. However, it is possible that the slight decrease in the $X_{\text{CO}\rightarrow\text{CO}_2}$ observed for all three catalysts from 225 °C (Fig. 6(c), 7(c), and 8(a)) is caused by the reduction of the Co₃O₄ surface to CoO, 27-32 despite this being undetected using bulk-sensitive PXRD. Furthermore, the increase in the amount of O2 converted via H2 oxidation might also explain the decrease in the $X_{\text{CO}\rightarrow\text{CO}_2}$ values from 225 °C. With reference to the MvK mechanism, the ultimate depletion of O2 at 225 °C for Co₃O₄/P25 and 250 °C for Co₃O₄/rutile and Co₃O₄/anatase may have led to the onset formation of CoO at these temperatures as there was no O2 available to stabilise (or regenerate) the active Co₃O₄ phase.^{25,26}

In situ PXRD adequately shows the formation of CoO at 250 °C in all three catalysts, which is later converted to fcc Co⁰ on anatase (325 °C) and to fcc and hcp Co⁰ on P25 (375 °C) and rutile (400 °C) (Fig. 6, 7, S10, and S12†). However, Co⁰ (with no distinction between fcc and hcp Co⁰) is detected earlier in the magnetometer, that is, at 300 °C for the P25- and rutile-supported catalysts, and at 325 °C for the anatase-supported catalyst (see DoR plots in Fig. 6(d), 7(d), and 8(d)). As stated in section 2.2.2., the magnetometer is more sensitive than PXRD, which explains the earlier detection of Co⁰ on P25 and rutile during the magnetometrybased experiments.²⁸⁻³² It can also be observed that within the temperature range where CoO exists in each catalyst, the amount of CO converted to CO2 decreases with increasing temperature, indicating that CoO catalyses H2 oxidation to a greater extent.27-32

Upon forming Co⁰, CO is converted to CH₄, which is an undesired CO conversion pathway because valuable H₂ is being consumed (eqn (3)).²⁷⁻³³ However, methanation only takes place over the fcc and hcp Co^0 formed on P25 (max. $X_{CO \rightarrow CH}$: 69.7% at 450 °C) and rutile (max. $X_{CO \to CH_4}$: 73.7% at 450 °C), and not over the fcc Co⁰ formed on anatase (Fig. 8(c)). The bare P25 and rutile supports also exhibit $X_{\text{CO}\rightarrow\text{CH}_4}$ values that are below 1%, with the anatase support displaying no methanation activity (Fig. 11(b)). At this stage, we propose that the metallic particles on anatase may be encapsulated by Ti_xO_y species, thereby blocking active sites on fcc Co⁰, which has been observed for a reduced Co/anatase catalyst used in the FTS. 16 The encapsulation is thought to be driven by the more facile reduction of anatase (also see H2-TPR profile in Fig. 5(b)), followed by the migration of Ti_xO_y species to the surface of fcc Co⁰ due to the significant differences in their surface energies (anatase: 0.44 J m⁻², and fcc Co⁰: 2.6 J m⁻²). 13-15 Evidence for Co encapsulation in this study, based on STEM-EELS analysis, is discussed in section 3.4.2.

$$CO(g) + 3H_2(g) \rightarrow CH_4(g) + H_2O(g) \quad \Delta H_{298.15K}^{\circ}$$

= -206.2 kJ mol⁻¹ (3)

Although considerable amounts of CH₄ are formed between 300 and 450 °C over the Co⁰ allotropes on P25 and rutile,

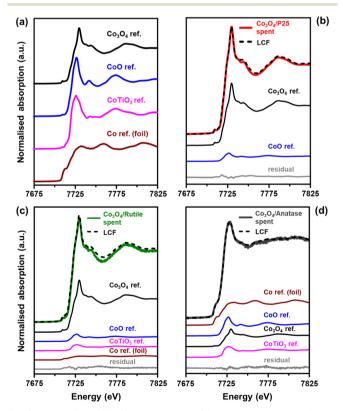


Fig. 9 Normalised XANES spectra of the (a) reference compounds and (b)-(d) spent samples obtained after performing CO-PrOx. The results from the LCF are also included in (b)-(d). The fitted reference components in (b)-(d) are scaled according to their contribution to the LCF.

there is also some CO_2 being formed, with $X_{CO \to CO_2}$ values that are less than 25% being achieved (Fig. 8(a)). Co⁰ is not known for catalysing CO oxidation but there is a possibility of an in situ water-gas shift (WGS) reaction taking place on the metallic surface, which first involves the formation of H2O via H₂ oxidation, followed by the reaction of this H₂O with CO (eqn (4)).29,31,32 Additionally, the direct oxidation of CO could be taking place over the unreduced CoO in the P25- and rutilesupported catalysts^{51–53} since they are not fully reduced even at 450 °C based on the magnetometry results (max. DoRs: 91.9% for Co₃O₄/P25 and 85.9% for Co₃O₄/rutile). The same could apply to the unreduced CoO present on anatase (max. DoR: 76.4% at 450 °C). At this stage, it is unclear if the encapsulated fcc Co⁰ particles on anatase catalyse the formation of CO₂ via CO oxidation, the WGS, or any other reaction pathway.

$$CO(g) + H_2O(g) = CO_2(g) + H_2(g) \quad \Delta H_{298.15K,forward}^{\circ}$$

= -41.1 kJ mol⁻¹ (4)

Unlike magnetometry, the PXRD measurements indicate a complete reduction of CoO to Co⁰ in all three catalysts at 450 °C (Fig. 6, 7, and S10†). As mentioned earlier, PXRD requires higher amounts of crystalline material for adequate detection, so it is possible that the remaining unreduced CoO is below the detection limit of PXRD (typically 2-3 wt%). Nonetheless, PXRD provides important crystallographic information (e.g., a distinction between fcc and hcp Co⁰ can be made), making it a suitable complementary technique to magnetometry. It is worth mentioning that during the PXRD-based reduction studies, Co₃O₄ ultimately reduced to fcc and hcp Co⁰ only on P25 and anatase (Fig. 3 and 4), while during CO-PrOx, Co₃O₄ reduces to both allotropes only on P25 and rutile.

Sławiński et al.46 and Nyathi et al.31 have shown that the formation of fcc and hcp Co⁰ (with different ratios) can be influenced by the gas environment. Although this effect was not investigated in-depth, the idea is that different reducing environments may cause the reduction to occur at different temperatures and reduction rates. Consequently, the metallic particles formed can also differ in size, leading to the formation of particles with crystalline domains of either one or both allotropes of Co. Additionally, the strength of the NPSI may influence the reduction of cobalt oxide particles (i.e., Co₃O₄ and CoO) depending on their size and the type of support used. 10,30,32,45 Therefore, the formation of fcc and hcp Co⁰ on anatase (during the PXRD-based reduction studies only) and rutile (during CO-PrOx only) might have been caused by the different gas environments and the nature of the interactions between these supports and the Co₃O₄/CoO particles. Moreover, these effects may have also resulted in the higher hcp Co⁰ content relative to fcc Co⁰ on P25 (hcp: fcc ratio: 1.3 at 450 °C), while more fcc Co than hcp Co⁰ is formed on rutile (hcp:fcc ratio: 0.5 at 450 °C) during CO-PrOx (Fig. 6(a) and 7(a)). Similar to the PXRD-based reduction experiments, Rietveld refinement could not be used to confirm fcc-hcp Co⁰ intergrowth, but the occurrence of this phenomenon cannot be ruled out.31,46,49

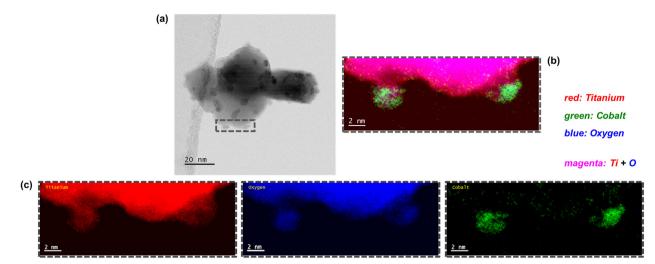


Fig. 10 (a) Bright-field STEM micrograph, (b) magnified STEM-EELS composite map showing the regions with Ti, O, and Co, and the (c) corresponding magnified STEM-EELS maps of the individual elements present in the spent Co₃O₄/anatase catalyst.

The reduction of Co₃O₄ on all support materials leads to the formation of CoO crystallites of similar sizes (on anatase) or smaller sizes (on P25 and rutile) than the starting Co₃O₄ crystallites (Fig. 6(b) and 7(b)), indicating minimal or no sintering. On anatase, the fcc Co⁰ crystallites are also similar in size as the CoO and Co₃O₄ crystallites, further confirming no significant crystallite growth. However, the fcc Co⁰ crystallites formed on P25 and rutile are larger than the crystallites of CoO, while hcp Co⁰ is smaller than CoO. As observed during the magnetometry studies, the P25- and rutilesupported catalysts achieved higher DoRs than the anatasesupported catalyst (Fig. 6(d), 7(d), and 8(d)), which may suggest the existence of weaker NPSIs in the highly reduced catalysts. 10,30,32,45 It is also possible that the sintering of fcc Co⁰ on P25 and rutile is a result of the weak NPSIs.54




Fig. 11 (Left) Bright-field STEM micrographs and the (right) magnified STEM-EELS composite maps showing the regions with Ti, O, and Co in the spent (a) Co₃O₄/P25 and (b) Co₃O₄/rutile catalysts.

3.4. Ex situ characterisation of spent catalysts

3.4.1. XAS measurements. Ex situ XAS measurements were conducted primarily to determine the presence of mixed metal oxides (such as CoTiO₃) in the spent catalysts. Since CoTiO₃ is not ferromagnetic,⁵⁵ it would not be detected using magnetometry. Although CoTiO3 is detectable using PXRD, the in situ diffraction patterns obtained for all catalysts during CO-PrOx did not show any reflections from this phase (Fig. S10†), possibly due to its formation in small amounts and/or small crystallite sizes.

The normalised XANES (X-ray absorption near edge structure) spectra of the reference compounds Co₃O₄, 44 $CoO,^{56}$ $CoTiO_3,^{57}$ and Co^0 (or Co foil) 58 are presented in Fig. 9(a). These reference compounds were synthesised according to the procedures outlined in the cited literature. The first derivatives of the XANES spectra for the reference compounds (Fig. S13†) also help to show the differences in their spectral features. Fig. 9(b)-(d) shows the XANES spectra of the spent catalysts together with the linear combination fit (LCF) and the individual fitted components, which have been scaled according to their contribution to the LCF. The phase compositions of the spent samples (based on the LCF) are presented in Table 3 together with the R-factors. It is worth mentioning that the quantities of the Co-based phases reported in Table 3 are on a Co basis because only the Co K-edge was measured. Therefore, the amounts of the different Co-based phases can be expected to be much lower than those presented in Table 3 after factoring in the proportion of the support, which is at least 90 wt% according to ICP-OES analysis.

The results of the LCF generally indicate a high concentration of Co₃O₄ in each spent sample, whereas the in situ PXRD experiments showed the complete disappearance of this phase to CoO and Co⁰ during CO-PrOx (Fig. 6, 7, and S10†). Therefore, the presence of Co₃O₄ in the spent samples analysed using XAS is likely due to the re-oxidation of the CoO

0.002

Co₃O₄/anatase spent

Co⁰ (%) Sample name CoO (%) CoTiO₃ (%) Co₃O₄ (%) R-Factor (-) Co₃O₄/P25 spent 88.9 ± 0.9 11.1 ± 0.6 0.003 Co₃O₄/rutile spent 73.0 ± 6.1 9.8 ± 3.6 8.9 ± 4.5 8.3 ± 1.2 0.010

21.8 + 1.5

 13.8 ± 1.8

Table 3 Results obtained after performing linear combination fitting on the normalised XANES spectra

and Co⁰ during the long storage times (6-12 months) of the samples in a non-inert environment prior to the XAS measurements. However, since determining the presence of mixed metal oxides using XAS was of primary importance, these oxides would remain stable during sample storage and therefore, should still be detectable. 10,57

21.3 + 0.7

The Co₃O₄/P25 spent catalyst underwent extensive reoxidation as the XANES spectrum mostly exhibits features similar to those of Co₃O₄ between 7700 and 7825 eV (Fig. 9(b)). The LCF also confirmed the presence of 88.9 \pm 0.9% Co_3O_4 and 11.1 \pm 0.6% CoO, with no traces of $CoTiO_3$. The spectrum of the rutile-supported spent catalyst (Fig. 9(c)) is also dominated by features of the Co_3O_4 phase (73.0 \pm 6.1%), but also shows an edge shift of approximately 1.5 eV to the left, relative to the main edge of the Co₃O₄ reference (which is at 7723 eV). This left shift is indicative of Co species of lower oxidation state, that is, below +3. Indeed, there are also relatively small amounts of CoO (9.8 \pm 3.6%), CoTiO₃ (8.9 \pm 4.5%), and Co^0 (8.3 ± 1.2%) in the Co_3O_4 /rutile spent catalyst. In these three phases, Co is either in the +2 or 0 oxidation state.

The XANES spectrum of Co₃O₄/anatase (Fig. 9(d)) exhibits different features from those observed in the spectra of Co₃O₄/P25 and Co₃O₄/rutile. There is a pronounced pre-edge feature at 7710 eV, which indicates the presence of Co⁰, and the edge and white line have shifted to the left by approximately 3 eV relative to the edge and white line of the Co₃O₄ reference (which are at 7723 and 7730 eV, respectively). The white line and the spectral features between 7750 and 7825 eV for Co₃O₄/anatase appear to be less intense (Fig. 9(d)). These observations further indicate the presence of relatively high amounts of Co^0 (43.2 ± 2.5%) in this spent sample. There is also CoO (21.8 \pm 1.5%), Co₃O₄ (21.3 \pm 0.7%), and $CoTiO_3$ (13.8 ± 1.8%) indicated by the LCF.

The presence of CoTiO₃ in the Co₃O₄/rutile and Co₃O₄/ anatase spent catalysts is in good agreement with the low magnetometry-derived DoRs reached by these samples (85.9% and 76.4%, respectively) at 450 °C during CO-PrOx when compared with Co₃O₄/P25 (91.9%), which did not form CoTiO3. We note that CoTiO3 was not observed in any supported catalyst during the PXRD-based in situ reduction or CO-PrOx experiments. This may have been a result of the CoTiO₃ amounts being below the detection limit of the PXRD instrument. Nonetheless, the higher content of CoTiO3 in Co₃O₄/anatase is possibly due to the high reduction susceptibility of anatase (also see H2-TPR profile in Fig. 6(b)) followed by the migration and reaction of Ti_xO_y with CoO_x species.^{7,10,16} Rutile is generally less susceptible to reduction, which might explain the lower amounts of CoTiO3 formed in Co₃O₄/rutile. The more facile formation of CoTiO₃ in Co₃O₄/

anatase is also supported by thermodynamic calculations (based on bulk phases), which show lower values for the change in the Gibbs free energy (ΔG) and partial pressure ratio of H_2 -to- H_2O $(p_H,p_{H,O})$ as a function of temperature than for Co₃O₄/rutile (Fig. S14 and S15†). The P25 support is a 15:85 mixture of rutile and anatase, which is thought to make the support (or the anatase fraction) more stable under reduction conditions. 21,22 This could explain the absence of CoTiO₃ in the Co₃O₄/P25 spent sample.

 43.2 ± 2.5

3.4.2. STEM-EELS analysis. The spent catalysts were also studied using STEM-EELS to determine changes in particle size in comparison with the fresh catalysts. Fig. 10 and 11 show the bright-field micrographs of the three spent samples as well as the corresponding elemental maps showing regions with Ti, O, and Co. PXRD measurements carried out during CO-PrOx indicated the presence of fcc and hcp Co⁰ crystallites at 450 °C that vary between 10 and 25 nm for the fcc phase, and between 5 and 10 nm for the hcp phase, among the three evaluated catalysts (Fig. 6(b) and 7(b)). Although the spent samples that were analysed using STEM-EELS likely underwent re-oxidation during storage, the particles shown in Fig. 10 and 11 are mostly below 10 nm, which is smaller than the starting Co₃O₄ particles (Table 1).

The exact cause of the size discrepancy between PXRD and STEM-EELS (especially regarding fcc Co⁰) remains unknown. However, it is possible that there exists a small number of large particles that were not identified using STEM-EELS, but were detected using PXRD, resulting in larger average sizes for fcc Co⁰ based on PXRD. Furthermore, in the absence of fcc-hcp Co⁰ intergrowth, the small particles identified using STEM-EELS could be hcp Co^o (although this is thermodynamically less feasible^{47,48}), or could have been derived from hcp Co⁰, in the case of re-oxidation during sample storage.³¹

Interestingly, some of the small Co-bearing particles located on the edge of the large anatase particles have been encapsulated by Ti_xO_y species (Fig. 10 and S16†). This is not observed in the STEM-EELS micrographs of the Co₃O₄/P25 and Co₃O₄/rutile spent samples (Fig. 11). The encapsulation of CoO_x particles by anatase-derived Ti_xO_y species is wellknown under reducing conditions, 7,10,16 but this is being observed after CO-PrOx for the first time in this study. In section 3.3., it was proposed that the absence of CH₄ in the CO-PrOx product stream of Co₃O₄/anatase (Fig. 7(c)) was due to the encapsulation of Co^0 (or more generally, CoO_x species). Therefore, the detection of Ti_xO_y -encapsulated Co-bearing particles using STEM-EELS could explain the absence of CH₄ formation over the partially reduced anatase-supported catalyst. Furthermore, it has been reported that the encapsulation of CoO_x particles by Ti_xO_y species may lead to

the formation of CoTiO_3 .^{7,10,16} This phase was detected in relatively high amounts (13.8 \pm 1.8%) in the Co_3O_4 /anatase spent sample using XAS.

4. Conclusions

The presented study investigated the effect of different TiO2 polymorphs (rutile, anatase, and a 15:85 mixture of rutile and anatase (also commercially known as P25)), used as supports, on the chemical and crystallographic phase transformations of Co₃O₄ during dry CO-PrOx. The phase changes were detected in situ using PXRD and magnetometry as a function of temperature, while ex situ XAS and STEM-EELS analyses of the spent catalysts provided further complementary information on the phase changes that occurred. Furthermore, on-line gas product analysis was coupled with the in situ characterisation to evaluate catalytic performance. It was shown that supporting Co₃O₄ on P25 results in high CO conversions to CO2, with a maximum conversion of 72.7% achieved at 200 °C. Owing to the high concentrations of H₂ in the feed (50%), the reduction of Co₃O₄ to CoO and ultimately to Co⁰ took place in all three catalysts, which caused a loss in the CO2 yield and selectivity. The DoR of Co₃O₄ to Co⁰ was highest on P25 (91.9% at 450 °C), while the DoR (76.4% at 450 °C) and CO₂ vield (51.5% at 200 °C) was lowest on anatase. Assuming the MvK mechanism for CO oxidation, which depends on surface reduction (and re-oxidation), the high CO oxidation activity of Co₃O₄/P25 could be a result of its high surface reducibility. Furthermore, the high surface and bulk reducibility (as determined via in situ characterisation for the latter) of Co₃O₄/ P25 could be due to the existence of weak interactions between the Co₃O₄ nanoparticles and P25 support.

The Co⁰ formed on P25 and rutile existed in the fcc and hcp crystal forms at elevated temperatures during CO-PrOx, while only fcc Co⁰ was formed on anatase. The average larger size of Co⁰ crystallites, relative to the size of CoO crystallites, on P25 and rutile may have led to the formation of (partially) intergrown crystalline domains of fcc and hcp Co⁰. This sintering may have also been a result of the weaker NPSIs in Co₃O₄/P25 and Co₃O₄/rutile when compared with the NPSIs in Co₃O₄/anatase. The formation of CoTiO₃ was confirmed in the anatase (13.8%) and rutile (8.9%) supported spent catalysts via ex situ XAS, while the presence of Ti_xO_y -encapsulated CoO_x particles was only observed in the anatase-supported spent catalyst via ex situ STEM-EELS. The encapsulation of CoO_x particles may have occurred because of the relatively high reducibility of the anatase support, which forms highly mobile Ti_xO_v species that migrate to the surface of the CoO_x particles. In the case of the encapsulated fcc Co⁰ particles on anatase, CH₄ formation did not take place (even at 450 °C) as the required surface active sites may have been blocked. On the other hand, CH₄ formation was observed over the fcc and hcp Co⁰ on P25 and rutile, possibly because of minimal or no encapsulation.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

Johnson Matthey, the DSI-NRF Centre of Excellence in Catalysis (c*change), and the Science and Technology Facilities Council (STFC) via GCRF-START (Global Challenges Research Fund – Synchrotron Techniques for African Research and Technology (ST/R002754/1)) are gratefully acknowledged for their financial support. The authors would also like to thank the staff in the Analytical Laboratory, within the Chemical Engineering department (University of Cape Town), for conducting the ICP-OES analysis. Finally, M. Panchal (University College London and UK Catalysis Hub) and Dr. N. Ramanan (Diamond Light Source) are thanked for assisting with the XAS measurements on beamline B18 at Diamond Light Source (sessions: SP19850-3, SP19850-4, and SP19850-5).

References

- 1 S. Farrokhpay, Adv. Colloid Interface Sci., 2009, 151, 24-32.
- 2 A. Jaroenworaluck, W. Sunsaneeyametha, N. Kosachan and R. Stevens, *Surf. Interface Anal.*, 2006, **38**, 473–477.
- 3 A. Fujishima and K. Honda, Nature, 1972, 238, 37-38.
- 4 D. A. H. Hanaor and C. C. Sorrell, Adv. Eng. Mater., 2014, 16, 248–254.
- 5 G. Jacobs, T. K. Das, Y. Zhang, J. Li, G. Racoillet and B. H. Davis, *Appl. Catal.*, A, 2002, 233, 263–281.
- 6 A. T. Bell, Science, 2003, 299, 1688-1691.
- 7 C. Hernández Mejía, T. W. van Deelen and K. P. de Jong, *Nat. Commun.*, 2018, 9, 1–8.
- 8 M. Mehrbod, M. Martinelli, A. G. Martino, D. C. Cronauer, A. Jeremy Kropf, C. L. Marshall and G. Jacobs, *Fuel*, 2019, 245, 488–504.
- 9 T. W. van Deelen, C. Hernández Mejía and K. P. de Jong, *Nat. Catal.*, 2019, **2**, 955–970.
- 10 M. Wolf, E. K. Gibson, E. J. Olivier, J. H. Neethling, C. R. A. Catlow, N. Fischer and M. Claeys, ACS Catal., 2019, 9, 4902–4918.
- 11 M. Wolf, N. Fischer and M. Claeys, *Nat. Catal.*, 2020, 3, 962–965.
- 12 M. Wolf, N. Fischer and M. Claeys, Chem Catal., 2021, 1, 1014–1041.
- 13 U. Diebold, Surf. Sci. Rep., 2003, 48, 53-229.
- 14 Q. Fu, T. Wagner, S. Olliges and H. D. Carstanjen, *J. Phys. Chem. B*, 2005, **109**, 944–951.
- 15 Q. Fu and T. Wagner, Surf. Sci. Rep., 2007, 62, 431-498.
- 16 V. A. de la Peña O'Shea, M. Consuelo Álvarez Galván, A. E. Platero Prats, J. M. Campos-Martin and J. L. G. Fierro, *Chem. Commun.*, 2011, 47, 7131–7133.
- 17 N. N. Greenwood and A. Earnshaw, in *Chemistry of the Elements*, ed. N. N. Greenwood and A. Earnshaw, Elsevier Ltd., 2nd edn, 1997, vol. 92, pp. 954–975.
- 18 S. Bagheri, N. Muhd Julkapli and S. B. A. Hamid, *Sci. World J.*, 2014, 2014, 1–21.

- 19 J. Li and D. Xu, Chem. Commun., 2010, 46, 2301.
- 20 L. Chu, Z. Qin, J. Yang and X. Li, Sci. Rep., 2015, 5, 12143.
- 21 B. Jongsomjit, C. Sakdamnuson and P. Praserthdam, *Mater. Chem. Phys.*, 2005, **89**, 395–401.
- 22 B. Jongsomjit, T. Wongsalee and P. Praserthdam, *Mater. Chem. Phys.*, 2005, **92**, 572–577.
- 23 T. V. Choudhary and D. W. Goodman, *Catal. Today*, 2002, 77, 65–78.
- 24 A. Mishra and R. Prasad, Bull. Chem. React. Eng. Catal., 2011, 6, 1–14.
- 25 P. Mars and D. W. van Krevelen, *Chem. Eng. Sci.*, 1954, 3, 41–59.
- 26 L. Lukashuk, N. Yigit, R. Rameshan, E. Kolar, D. Teschner, M. Hävecker, A. Knop-Gericke, R. Schlögl, K. Föttinger and G. Rupprechter, ACS Catal., 2018, 8, 8630–8641.
- 27 L. Lukashuk, K. Föttinger, E. Kolar, C. Rameshan, D. Teschner, M. Hävecker, A. Knop-Gericke, N. Yigit, H. Li, E. McDermott, M. Stöger-Pollach and G. Rupprechter, *J. Catal.*, 2016, 344, 1–15.
- 28 T. M. Nyathi, N. Fischer, A. P. E. York and M. Claeys, *Faraday Discuss.*, 2017, 197, 269–285.
- 29 M. Khasu, T. Nyathi, D. J. Morgan, G. J. Hutchings, M. Claeys and N. Fischer, Catal. Sci. Technol., 2017, 7, 4806–4817.
- 30 T. M. Nyathi, N. Fischer, A. P. E. York, D. J. Morgan, G. J. Hutchings, E. K. Gibson, P. P. Wells, C. R. A. Catlow and M. Claeys, ACS Catal., 2019, 9, 7166–7178.
- 31 T. M. Nyathi, N. Fischer, A. P. E. York and M. Claeys, *ACS Catal.*, 2020, **10**, 11892–11911.
- 32 T. M. Nyathi, M. I. Fadlalla, N. Fischer, A. P. E. York, E. J. Olivier, E. K. Gibson, P. P. Wells and M. Claeys, *Appl. Catal.*, *B*, 2021, 297, 120450.
- 33 M. I. Fadlalla, T. M. Nyathi and M. Claeys, *Catalysts*, 2022, **12**, 118.
- 34 M. C. M. Claeys and N. F. Fischer, Sample Presentation Device for Radiation-Based Analytical Equipment, US Pat., 8597598B2, 2013.
- 35 N. Fischer and M. Claeys, Catal. Today, 2016, 275, 149-154.
- 36 N. Fischer and M. Claeys, J. Phys. D: Appl. Phys., 2020, 53, 293001.
- 37 M. C. M. Claeys, E. W. J. van Steen, J. L. Visagie and J. van de Loosdrecht, Magnetometer, *US Pat.*, 8773118B2, 2014.
- 38 P. Munnik, N. A. Krans, P. E. de Jongh and K. P. de Jong, *ACS Catal.*, 2014, 4, 3219–3226.
- 39 V. Sechovský, in Encyclopedia of Materials: Science and Technology, ed. K. H. J. Buschow, R. W. Cahn, M. C. Flemings, B. Ilschner, E. J. Kramer, S. Mahajan and P.

- Veyssière, Elsevier Science Ltd, 2nd edn, 2001, pp. 5018-5032.
- 40 A. A. Coelho, J. Appl. Crystallogr., 2003, 36, 86-95.
- 41 C. Weidenthaler, Nanoscale, 2011, 3, 792-810.
- 42 E. Marceau, X. Carrier, M. Che, O. Clause and C. Marcilly, in *Handbook of Heterogeneous Catalysis*, ed. G. Ertl, H. Knözinger, F. Schüth and J. Weitkamp, Wiley-VCH Verlag GmbH & Co. KGaA, Weinheim, Germany, 2008, pp. 467–484.
- 43 E. van Steen, M. Claeys, M. E. Dry, J. van de Loosdrecht, E. L. Viljoen and J. L. Visagie, *J. Phys. Chem. B*, 2005, **109**, 3575–3577.
- 44 N. Fischer, E. van Steen and M. Claeys, *Catal. Today*, 2011, 171, 174–179.
- 45 N. Fischer, M. Minnermann, M. Baeumer, E. van Steen and M. Claeys, *Catal. Lett.*, 2012, 142, 830–837.
- 46 W. A. Sławiński, E. Zacharaki, H. Fjellvåg and A. O. Sjåstad, *Cryst. Growth Des.*, 2018, **18**, 2316–2325.
- 47 E. Klugmann, H. J. Blythe and F. Walz, *Phys. Status Solidi A*, 1994, **146**, 803–813.
- 48 S. Ram, Mater. Sci. Eng., A, 2001, 304-306, 923-927.
- 49 H. E. du Plessis, J. P. R. de Villiers, A. Tuling and E. J. Olivier, *Phys. Chem. Chem. Phys.*, 2016, **18**, 30183–30188.
- 50 E. van Steen, G. S. Sewell, R. A. Makhothe, C. Micklethwaite, H. Manstein, M. de Lange and C. T. O'Connor, *J. Catal.*, 1996, **162**, 220–229.
- 51 L. Zhong, T. Kropp, W. Baaziz, O. Ersen, D. Teschner, R. Schlögl, M. Mavrikakis and S. Zafeiratos, ACS Catal., 2019, 9, 8325–8336.
- 52 L. Zhong, M. Barreau, V. Caps, V. Papaefthimiou, M. Haevecker, D. Teschner, W. Baaziz, E. Borfecchia, L. Braglia and S. Zafeiratos, *ACS Catal.*, 2021, **11**, 5369–5385.
- 53 L. Zhong, M. Barreau, D. Chen, V. Caps, M. Haevecker, D. Teschner, D. H. Simonne, E. Borfecchia, W. Baaziz, B. Šmíd and S. Zafeiratos, *Appl. Catal.*, B, 2021, 297, 120397.
- 54 R. C. Reuel and C. H. Bartholomew, *J. Catal.*, 1984, **85**, 78–88.
- 55 R. E. Newnham, J. H. Fang and R. P. Santoro, *Acta Crystallogr.*, 1964, 17, 240–242.
- 56 M. Wolf, N. Fischer and M. Claeys, *Mater. Chem. Phys.*, 2018, 213, 305–312.
- 57 M. Wolf, S. J. Roberts, W. Marquart, E. J. Olivier, N. T. J. Luchters, E. K. Gibson, C. R. A. Catlow, J. H. Neethling, N. Fischer and M. Claeys, *Dalton Trans.*, 2019, 48, 13858–13868.
- 58 A. J. Dent, G. Cibin, S. Ramos, A. D. Smith, S. M. Scott, L. Varandas, M. R. Pearson, N. A. Krumpa, C. P. Jones and P. E. Robbins, J. Phys.: Conf. Ser., 2009, 190, 012039.