


 Cite this: *RSC Adv.*, 2024, 14, 6598

# Enhancing continuous-flow reactions *via* compression-molding of solid catalysts and dilutants in packed-bed systems†

Kwhwan Kobayashi, Teruhiko Tanaka, Yoshihiro Kon, Hajime Kawanami \* and Nagatoshi Koumura \*

 Received 26th November 2023  
 Accepted 15th February 2024

DOI: 10.1039/d3ra08088a

[rsc.li/rsc-advances](https://rsc.li/rsc-advances)

In this study, we present an improved packed-bed system designed for continuous-flow reactions using platinum (Pt)-black powder and silica gel (SiO<sub>2</sub>). The Pt-leaching from the reaction column is suppressed *via* compression-molding of the Pt and SiO<sub>2</sub>. Scanning electron microscopy results and particle-size distribution analysis demonstrate that crushed and downsized SiO<sub>2</sub> is effective in suppressing outflow. Furthermore, we successfully conducted a scaled-up experiment of the flow reaction using a large column, achieving excellent productivity.

## Introduction

The continuous-flow (CF) method represents a novel technology that offers several advantages over traditional batch methods. These benefits encompass ease of scalability, enhanced safety, and improved environmental friendliness.<sup>1–5</sup> In particular, the development of packed-bed flow methods utilizing columns filled with solid catalysts is in high demand.<sup>6–10</sup> Fine powder catalysts (metal-on-support catalyst, polymer, *etc.*) which are used for the packed-bed flow method are generally premixed with a solid dilutant, such as Celite, silica gel (SiO<sub>2</sub>), or metal oxide. This precautionary measure prevents the clogging of the reaction column and the increment of the reaction pressure. We also developed various CF reactions employing the reaction column packed with premixed solid catalysts and dilutants.<sup>11–13</sup>

Recently, the CF-oxidation of alcohols using hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>) was developed in a reaction column.<sup>14</sup> This column was packed with platinum (Pt)-black powder and SiO<sub>2</sub>, and equipped with a Teflon column filter. Since H<sub>2</sub>O<sub>2</sub> and oxygen gas are a clean oxidant that forms water after oxidation,<sup>15</sup> this flow oxidation is remarkable in terms of environmental friendliness. As part of our efforts to scale up the process, we conducted a preliminary experiment using a large column (inner diameter (ID): 10 mm and length (L): 100 mm). In the previous work we employed a small reaction column (ID: 5 mm, L: 100 mm) in conjunction with *tert*-amyl alcohol (*t*-amylOH) as the solvent. Initially, the substrate and water were simultaneously introduced into the prepared reaction column

packed with Pt-black and SiO<sub>2</sub> before transitioning to the substrate solution and H<sub>2</sub>O<sub>2</sub>. For the scaled-up experiment involving a large reaction column (ID: 10 mm, L: 100 mm), only water was introduced into the column before the reaction to avoid the risk of Pt-ignition. Unfortunately, the treatment of the column with water led to the undesired leaching of Pt-black from the reaction column. Based on this result, it was determined that stable operation for scaled-up experiments is infeasible owing to the risk of catalyst leaching and clogging of the column. Our analysis suggests that the leaching occurred due to the void space within the reaction column, which resulted from the disparity in particle size difference between the Pt powder and SiO<sub>2</sub>. Substituting other solid dilutants, such as aluminum oxide and magnesium oxide, for controlling the leaching was not suitable due to the resulting decrease in catalyst reactivities.<sup>14</sup> Consequently, we initiated an investigation into a method for suppressing the leaching of Pt-black powder from the reaction column by diluting it with SiO<sub>2</sub>. The void space can be reduced by packing the column with a catalyst in which Pt is supported on silica. However, with the supported catalyst, Pt is slightly oxidized by silica, which reduces its reactivity.<sup>14</sup> Thus, a method is needed to pack the column without void spaces while maintaining Pt-black in its zero-valency state.

## Results and discussion

### EDX analysis for the Pt content in the column after the reaction

To confirm the composition of the catalyst in the column before and after the CF-oxidation of alcohols, we performed energy-dispersive X-ray spectroscopy (EDX) for the Pt content in the reaction column (Table 1). Initially, the 0.42 wt% Pt-black powder (particle size: 2–20 μm) and SiO<sub>2</sub> were premixed and

Interdisciplinary Research Center for Catalytic Chemistry, National Institute of Advanced Industrial Science and Technology, Central 5, Higashi 1-1-1, Tsukuba, Ibaraki 305-8565, Japan. E-mail: [h-kawanami@aist.go.jp](mailto:h-kawanami@aist.go.jp); [n-koumura@aist.go.jp](mailto:n-koumura@aist.go.jp)

† Electronic supplementary information (ESI) available. See DOI: <https://doi.org/10.1039/d3ra08088a>



packed into a glass reaction column (ID: 10 mm, L: 100 mm). The columns were installed in a flow reactor (EYELA, MCR-1000). Following the introduction of only water into the column, the flow reactor was heated to 90 °C, and a 2.0 wt% H<sub>2</sub>O<sub>2</sub> aqueous solution and a benzyl alcohol (1) solution in *t*-amylOH were pumped to the reaction column at a flow rate of 0.4 mL min<sup>-1</sup> for 24 h. Subsequently, the column was cooled to room temperature and rinsed with *t*-amylOH and water. The catalysts were then removed from the column and dried *in vacuo*. Detailed information on the reaction setup and procedures are provided in the ESI.† The Pt content in the column before and after the flow reaction was measured *via* EDX at four different locations (Table 1). When employing the reaction column packed with Pt-black powder and Wakogel C-200 (75–150 μm), the Pt content in the column significantly decreased from 0.42% to 0.07–0.26% after the reaction (entry 1). Notably, the Pt in the column at the inlet side (parts A and B) leached 1.2–2.2 times faster than at the outlet side (parts C and D) considering the ratio of reduction for Pt amount. Afterward, the reaction column was packed with Pt and 60-spherical SiO<sub>2</sub> (SiO<sub>2</sub>-60-S, Kanto Chemical Co. Inc.), which has a smaller particle size (40–50 μm) than Wakogel C-200 (entry 2). The leaching of Pt from the reaction column was improved compared with that of Wakogel C-200, although some Pt flowed out even when using SiO<sub>2</sub>-60-S.

Compression-molding (CM) is a forming method that provides a desired-shaped powder using a mold with optional pressure.<sup>16,17</sup> Consequently, we envisaged that Pt could adhere to the solid dilutant, and by employing CM, the void space within Pt and the solid dilutant could be minimized. Premixed Pt and SiO<sub>2</sub>-60-S were pressed using a press machine (RIKEN KIKI Co. Ltd., CDM-5PA) and mold (AS ONE CORPORATION, mold for heat press machine φ14) under a pressure of 20 MPa for 2 h. After CM, the resulting cylindrical-shaped solid was crushed, filtrated through a 300 μm-filter, and then packed into the reaction column. Importantly, the amount of Pt remained

unchanged after the reaction within the prepared column (entry 3). Thus, the leaching of Pt during the reaction can be suppressed by CM. On the other hand, using the reaction column that SiO<sub>2</sub>-60-S was compression-molded alone and then mixed with Pt, the Pt content decreased after the reaction (entry 4). Therefore, CM of Pt and SiO<sub>2</sub>-60-S together was effective for the Pt leaching.

### SEM and EDX analysis for catalysts

Scanning electron microscopy (SEM) and EDX mapping of the catalysts were performed to evaluate the impact of CM on Pt and SiO<sub>2</sub>-60-S (Fig. 1). At first, SiO<sub>2</sub>-60-S exhibited a spherical morphology before CM (Fig. 1(a)); however, after CM, these spherical SiO<sub>2</sub>-60-S were crushed (Fig. 1(b)). In the EDX mapping images, SiO<sub>2</sub>-60-S appeared orange while Pt was blue (Fig. 1(c) and (d)). These images reveal that a portion of the Pt

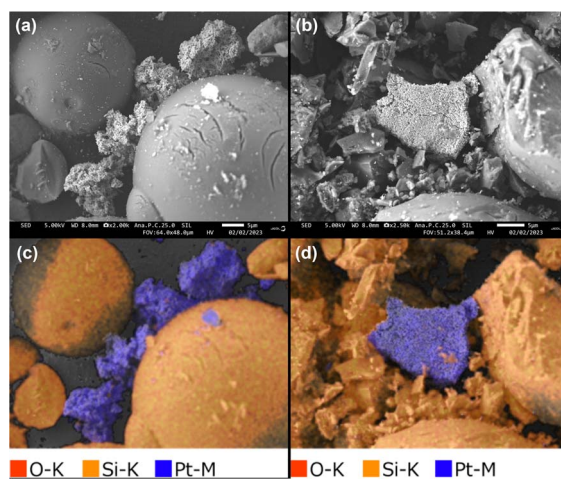


Fig. 1 (a) A scanning electron microscopy (SEM) image of premixed Pt and SiO<sub>2</sub>-60-S. (b) A SEM image of compression-molded Pt and SiO<sub>2</sub>-60-S. (c) Energy-dispersive X-ray spectroscopy (EDX) mapping of premixed Pt and SiO<sub>2</sub>-60-S. (d) EDX mapping of compression-molded Pt and SiO<sub>2</sub>-60-S.

Table 1 Energy-dispersive X-ray spectroscopy (EDX) analysis of Pt in the reaction column before and after the continuous-flow (CF) oxidation reaction

Entry	SiO <sub>2</sub>	EDX analysis of the Pt rate (%)			
		A	B	C	D
1	Wakogel C-200	0.07	0.07	0.12	0.26
2	SiO <sub>2</sub> -60-S	0.32	0.27	0.38	0.31
3 <sup>a</sup>	SiO <sub>2</sub> -60-S	0.42	0.43	0.42	0.42
4 <sup>b</sup>	SiO <sub>2</sub> -60-S	0.37	0.26	0.36	0.37

<sup>a</sup> Compression-molded Pt with SiO<sub>2</sub>-60-S was used. <sup>b</sup> SiO<sub>2</sub>-60-S was compression-molded alone and then mixed with Pt.

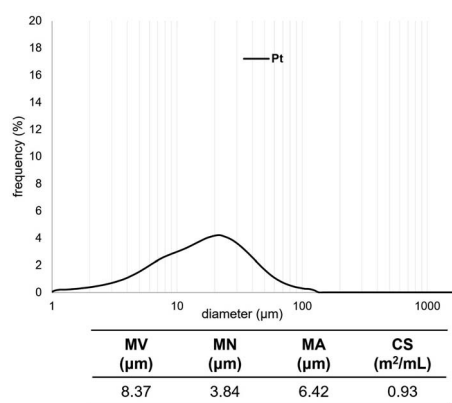
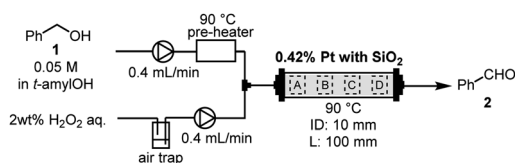


Fig. 2 Particle size distributions of Pt. MV: mean volume diameter, MN: mean number diameter, MA: mean area diameter, CS: specific surface area.



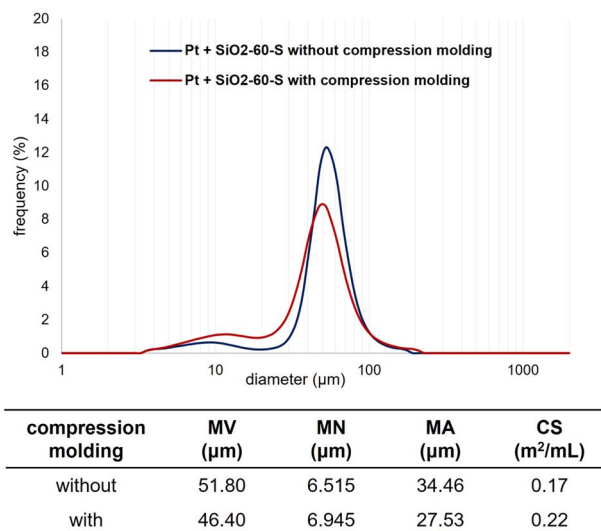


Fig. 3 Particle size distributions of Pt and SiO<sub>2</sub>-60-S without and with compression-molding (CM).

powder was attached to SiO<sub>2</sub>-60-S. Furthermore, we confirmed the void volume of the reaction column packed with Pt and SiO<sub>2</sub>-60-S. The void volume of the reaction column without CM was 6.36 mL, while that with CM was 4.72 mL. Detailed results were provided in the ESI.† The presence of crushed SiO<sub>2</sub>-60-S contributed to a reduction in void space. Consequently, it is evident that the adhesion between Pt and SiO<sub>2</sub>-60-S, coupled with the smaller void space, effectively suppressed the leaching of Pt powder.

### Particle-size distribution of catalysts

We measured the particle-size distribution of the SiO<sub>2</sub>-60-S and/or Pt-black powder with and without CM (Fig. 2 and 3). In Fig. 2, the particle-size distribution of only Pt was assessed, revealing particles (derived from Pt) with diameters of approximately 10 μm. Fig. 3 clearly illustrates the differences in the size distribution between SiO<sub>2</sub>-60-S and Pt without CM (the peaks of around 10 μm and 50 μm). Conversely, the difference in particle size SiO<sub>2</sub>-60-S and Pt with CM was small. The particle-size distributions of only SiO<sub>2</sub>-60-S with and without CM are

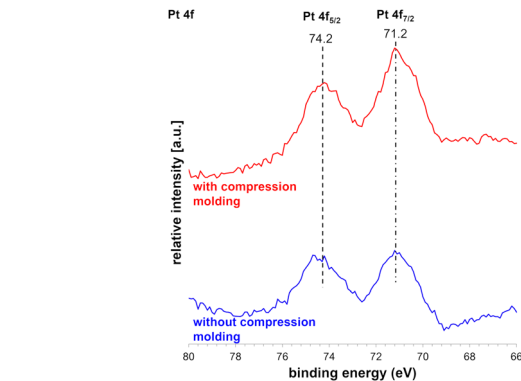


Fig. 4 XPS analysis of Pt and SiO<sub>2</sub>-60-S with and without CM.

provided in the ESI.† Based on the SEM results and particle-size distribution, we concluded that the crushed- and downsized-SiO<sub>2</sub>-60-S effectively suppressed Pt flow from the reaction column during the reaction.

### ICP-AES analysis of Pt with/without CM for the CF reaction


We analysed the Pt content after introducing water for 3 h using inductively coupled plasma atomic emission spectroscopy (ICP-AES), with the results shown in Table 2. The analysis employed a flow reactor equipped with a reaction column (ID: 10 mm, L: 100 mm) and a flow reactor (EYELA, MCR-1000). Water was pumped into the reaction column packed with Pt and SiO<sub>2</sub>-60-S at 0.4 mL min<sup>-1</sup> for 3 h. The solutions that passed through the column for 3 h were subjected to ICP-AES analysis (ESI†). ICP-AES analysis without CM indicated that 0.48 mg (2.66%) of Pt flowed out from the reaction column packed with 17.95 mg of Pt (entry 1). In contrast, when using a column packed with compression-molded catalysts, the rate of Pt leaching from the column considerably reduced to 0.13% (entry 2). This clearly demonstrates the effectiveness of CM of Pt and SiO<sub>2</sub>-60-S in suppressing the flow of Pt powder from the column. The reproducibility of the leaching tests was described in ESI.†

### XPS analysis of Pt with/without CM

X-ray photoelectron spectroscopy (XPS) was performed with and without CM of Pt with SiO<sub>2</sub>-60-S catalysts (Fig. 4). The peaks at

Table 2 Inductively coupled plasma atomic emission spectroscopy (ICP-AES) analysis of Pt with/without CM for the CF reaction

Entry	CM	Amount of Pt packed in the column	ICP-AES analysis of Pt	
			Amount of Pt flowing out	Rate of Pt flowing out from column
1	Without	17.95 mg	0.48 mg	2.66%
2	With	21.20 mg	0.03 mg	0.13%

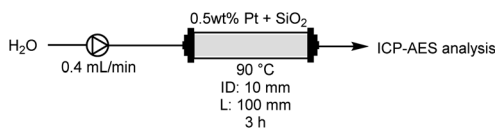

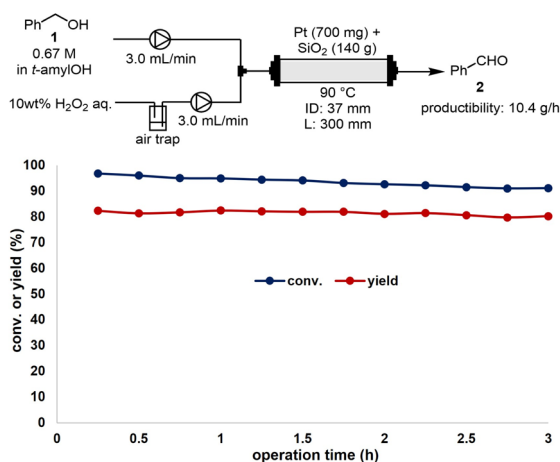


Fig. 5 The scale-up experiment for the CF-oxidation reaction.

71.2 and 74.2 represent the binding energies (BEs) of the CM catalysts, which are ascribed to Pt 4f<sub>7/2</sub> and Pt 4f<sub>5/2</sub>, respectively. These values of the Pt 4f peaks were close to 70.9 and 74.2 eV, which were assigned to the BEs of the bulk Pt metal, and the observed peaks corresponded to Pt(0).<sup>18,19</sup> This indicates that whether compression-molded or not, there was no change in the Pt 4f<sub>7/2</sub> and Pt 4f<sub>5/2</sub> peaks, affirming the preservation of Pt(0) even after CM.

### Scale-up experiment for the CF-oxidation using compression-molded Pt and SiO<sub>2</sub>-60-S

Finally, we conducted a 10 g-scale-up experiment at the laboratory scale for the CF-oxidation reaction of benzyl alcohol (1) to benzaldehyde (2) using compression-molded Pt and SiO<sub>2</sub>-60-S (Fig. 5). A stainless-steel (SUS) reaction column (ID: 37 mm, L: 300 mm) and flow reactor (EYELA, HCR-1000) were employed for the bench-scale reaction. The mesh size of the SUS column filter (EYELA, SUS laminated metal filter) was 10 μm. To scale up the CM experiment, a press machine (RIKEN KIKI Co. Ltd., CDM-5PA) and mold (Labonect, LD-3025, φ30 mm × 25 mm) were utilized. Premixed Pt and SiO<sub>2</sub>-60-S were pressed at 40 MPa for 2 h to obtain the compression-molded catalysts. A solution of 1 in *t*-amylOH (0.67 M) and 10 wt% of an aqueous H<sub>2</sub>O<sub>2</sub> solution were introduced at a flow rate of 3.0 mL min<sup>-1</sup> into the reaction column and heated to 90 °C. The yield of 2 was maintained at over 80%, with its productivity being 10.4 g h<sup>-1</sup>. In comparison, a previous study reported a productivity of 0.7 g h<sup>-1</sup> for 2.<sup>14</sup> Thus, a significant fifteen-fold scale-up of the reaction was achieved through the use of a large column (ID: 37 mm, L: 300 mm).

## Conclusions

We have successfully developed an improved packed-bed system for CF-oxidation reactions. This system employs a compression-molded Pt-black catalyst and SiO<sub>2</sub>-60-S to effectively suppress Pt leaching from the column during reactions. Stable flow oxidation was conducted by utilizing CM. According to the SEM and particle-size distribution results, the crushed-

and downsized-SiO<sub>2</sub>-60-S was effective in avoiding Pt leaching. Furthermore, we scaled up the CF-oxidation of benzyl alcohol to benzaldehyde using compression-molded Pt and SiO<sub>2</sub>-60-S. This scale-up was performed, resulting in a final productivity of 10.4 g h<sup>-1</sup> for benzaldehyde. We believe that our CM method for solid catalysts and dilutants holds great promise for small-to-large-scale experiments of CF reactions because it effectively prevents catalyst leaching from the reaction columns.

## Conflicts of interest

There are no conflicts to declare.

## Acknowledgements

The authors thank Dr Koichiro Masuda (National Institute of Advanced Industrial Science and Technology) and Yasuharu Morii (EYELA) for their valuable contributions and insightful discussions. This study was partially supported by the New Energy and Industrial Technology Development Organization (JPNP19004).

## Notes and references

- G. Gambacorta, J. S. Sharley and I. R. Baxendale, *Beilstein J. Org. Chem.*, 2021, **17**, 1181–1312.
- N. C. Neyt and D. L. Riley, *React. Chem. Eng.*, 2021, **6**, 1295–1326.
- R. Porta, M. Benaglia and A. Puglisi, *Org. Process Res. Dev.*, 2016, **20**, 2–25.
- M. Guidi, P. H. Seeberger and K. Gilmore, *Chem. Soc. Rev.*, 2020, **49**, 8910–8932.
- J. Britton and C. L. Raston, *Chem. Soc. Rev.*, 2017, **46**, 1250–1271.
- J. N. Appaturi, R. Ratti, B. L. Phoon, S. M. Batagarawa, I. U. Din, M. Selvaraj and R. J. Ramalingam, *Dalton Trans.*, 2021, **50**, 4445–4469.
- J. C. Pastre, D. L. Browne and S. V. Ley, *Chem. Soc. Rev.*, 2013, **42**, 8849.
- K. Masuda, T. Ichitsuka, N. Koumura, K. Sato and S. Kobayashi, *Tetrahedron*, 2018, **74**, 1705–1730.
- A. Tanimu, S. Jaenicke and K. Alhooshani, *Chem. Eng. J.*, 2017, **327**, 792–821.
- C. G. Thomson, A.-L. Lee and F. Vilela, *Beilstein J. Org. Chem.*, 2020, **16**, 1495–1549.
- T. Ichitsuka, N. Suzuki, M. Sairenji, N. Koumura, S. Onozawa, K. Sato and S. Kobayashi, *ChemCatChem*, 2019, **11**, 2427–2431.
- T. Ichitsuka, I. Takahashi, N. Koumura, K. Sato and S. Kobayashi, *Angew. Chem., Int. Ed.*, 2020, **59**, 15891–15896.
- K. Kobayashi, K. Masuda, F. Feng, Md. N. Rashed, K. Sato, N. Koumura and S. Kobayashi, *Adv. Synth. Catal.*, 2023, **365**, 1618–1622.
- Y. Kon, T. Nakashima, A. Yada, T. Fujitani, S. Onozawa, S. Kobayashi and K. Sato, *Org. Biomol. Chem.*, 2021, **19**, 1115–1121.



- 15 Y.-H. Lu, C. Wu, J.-C. Hou, Z.-L. Wu, M.-H. Zhou, X.-J. Huang and W.-M. He, *ACS Catal.*, 2023, **13**, 13071–13076.
- 16 Y. Nagai, K. Takeshita and T. Okane, *Mater. Trans.*, 2020, **61**, 734–739.
- 17 S.-W. Jin, Y.-J. Choi, H.-C. Yu, S.-H. Lee, Y.-J. Jin, I.-S. Lee, H.-S. Lee and C.-M. Chung, *ACS Sustainable Chem. Eng.*, 2022, **10**, 1910–1919.
- 18 C. D. Wagner, W. M. Riggs, L. E. Davis and J. F. Moulder, *Handbook of X-Ray Photoelectron Spectroscopy*, ed. G. E. Mullemberg, PerkinElmer, Eden Prairie, MN, 1978.
- 19 Y. Yamauchi, T. Ohsuna and K. Kuroda, *Chem. Mater.*, 2007, **19**, 1335–1342.

