



Cite this: *RSC Adv.*, 2024, 14, 17140

Physical properties of newly synthesized noncentrosymmetric TaIr_2B_2 and NbIr_2B_2 superconductors: an extensive comparison of GGA and LDA functional investigations†

Jakiul Islam, *^a Mohasena Ahamed,^b Md. Saiful Alam^c and Newaz Mohammad Bahadur^d

In recent years, noncentrosymmetric (NCS) structural compounds have received much attention from the scientific community in the exploration for the unconventional nature of superconductivity with exciting physical properties. This study uses the comprehensive generalized gradient approximation (GGA) and local density approximation (LDA) to gain insights into the physical properties of two recently synthesized Ir-based NCS superconductors, TaIr_2B_2 and NbIr_2B_2 . The structural parameters, mechanical performance, electronic structure, Debye temperature, melting temperature, electronic specific heat, and electron–phonon coupling constant of TaIr_2B_2 and NbIr_2B_2 are explored and discussed in detail. Density functional theory (DFT) optimized structural parameters of both NCS phases agree well with experimental observation. Both GGA and LDA calculations show that the compounds are ductile, machinable, mechanically stable, and anisotropic in nature. The elastic moduli and hardness calculations reveal that TaIr_2B_2 is harder than NbIr_2B_2 . The calculation of the melting temperature reveals that TaIr_2B_2 is more suitable for high temperature technology applications compared to NbIr_2B_2 . Both GGA and LDA functionals reveal that the optical functions are very similar. Both compounds display a significant amount of reflectivity spectra over a wide range of photon energies. The GGA functional reveals a somewhat higher density of states value compared to that of LDA. The present calculated values of the electron–phonon coupling constant of both compounds are consistent with values previously reported from experimental studies.

Received 16th April 2024
Accepted 13th May 2024

DOI: 10.1039/d4ra02822h

rsc.li/rsc-advances

1. Introduction

Researchers have endeavored to discover new families of superconducting materials with novel properties since early stages of the invention of superconductivity.¹ To scientists, it is highly challenging and fascinating to interpret the electronic configuration of a new class of superconducting compounds with diverse properties for future application in advanced quantum technologies. A recent experimental report of two Ir-based NbIr_2B_2 and TaIr_2B_2 superconductors by Górnicka *et al.*² has introduced a revolutionary addition to the study of superconductivity. They revealed the noncentrosymmetric (NCS)-type structural configuration of both compounds with superconducting transition temperatures at 5.2 and 7.2 K for TaIr_2B_2 and NbIr_2B_2 , respectively. Centrosymmetric

superconducting compounds generally exhibit inversion symmetry, maintaining the conventional Cooper pairs. Conversely, the NCS superconductors typically do not follow the conventional Cooper pairs as a result of the lack of inversion symmetry.^{2,3} The NCS superconductors have received enormous attention by the research community due to their unconventional nature of superconductivity with fascinating physical properties.^{2–13} In 2021, Gao and his coworkers revealed the interesting topological properties in these Ir-based NCS TaIr_2B_2 and NbIr_2B_2 compounds.⁴ In the normal state, they suggested that these two Ir-based compounds are topological Weyl metals. They observed prominent topological properties such as the Weyl points, the hourglass Weyl rings, the nodal net, and the Fermi arcs close to the Fermi level. In 2022, Das and his co-authors also suggested the unconventional nature of

^aDepartment of Physics, Noakhali Science and Technology University, Noakhali 3814, Bangladesh. E-mail: jislam.phy@nstu.edu.bd; jakiul.phy@gmail.com

^bDepartment of Mathematics, Hajee Mohammad Danesh Science and Technology University, Dinajpur, Bangladesh

^cDepartment of Applied Chemistry and Chemical Engineering, Noakhali Science and Technology University, Noakhali 3814, Bangladesh

^dDepartment of Chemistry, Noakhali Science and Technology University, Noakhali 3814, Bangladesh

† Electronic supplementary information (ESI) available. See DOI: <https://doi.org/10.1039/d4ra02822h>



superconductivity in NbIr₂B₂, along with time reversal symmetry.⁵ Due to their excellent and diverse properties, NCS superconductors have become the forefront in the field of superconductivity research. In 2022, Islam and his coworkers theoretically explored the physical and superconducting behaviours of two Rh-based NCS compounds TaRh₂B₂ and NbRh₂B₂ with chiral structure using DFT and GGA.¹² These NCS compounds exhibited attractive properties such as their ductile nature, ease of machinability, anisotropic entity, notable values of melting temperature, and prominent reflectivity profile.^{12,13}

To predict the practical application of newly synthesized materials, it is necessary to determine their fundamental physical properties, such as the mechanical performance (ductility/brittleness, hardness, and machinability), melting temperature, and optical properties (optical conductivity, reflectivity, optical absorption, dielectric function, and loss function).

An extensive literature survey reveals that the above-mentioned physical properties are still unexplored for the recently synthesized NCS TaIr₂B₂ and NbIr₂B₂ compounds. Therefore, this research deals with a detailed theoretical investigation of the physical properties of the NCS TaIr₂B₂ and NbIr₂B₂ superconductors using GGA and LDA functionals to predict the applications of these novel materials with diverse perspectives. A comparative analysis of the precision in the computational performance of these two exchange-correlation functionals GGA and LDA in investigating the properties of materials is also presented in this literature. Owing to the general affinity of GGA (LDA) for underbinding (overbinding) the crystal,^{14–16} the arithmetic averages of the GGA and LDA results of the investigated properties of the NCS compounds are also thus presented in this study to achieve a better understanding.

2. Methodology

In this research, the geometry optimization and calculations of the physical properties of the NCS TaIr₂B₂ and NbIr₂B₂ superconductors were executed using the DFT-based^{17,18} code Cambridge Serial Total Energy Package (CASTEP).¹⁹ Two well-known exchange-correlation (XC) functionals, LDA (of Ceperley and Alder (CA)²⁰ – Perdew and Zunger (PZ)²¹) and GGA (of Perdew–Burke–Ernzerhof (PBE)²²), were used in these DFT calculations. The LDA approach is assumed to be the basis of all approximated XC functionals, in which the energy is considered as a local functional (or nearly local) with regard to density. The GGA functional constructed upon LDA considers both the density, as well as its gradient. In this study, a comparative analysis between the GGA and LDA investigated properties has been presented in detail. The electron-ion interactions were performed with ultra-soft pseudopotentials (Vanderbilt-type),²³ which uses lower energy cutoffs, along with less calculation time. The energy cutoffs of 600 eV, along with 504 irreducible *k*-points, were settled for the geometry optimization and properties calculations. The sampling of the *k*-points grid inside the first Brillouin zone was executed by inserting Monkhorst–Pack parameters.²⁴ To minimize the core electron influence, pseudo-

atomic calculations were treated with valence electrons only. The Broyden–Fletcher–Goldfarb–Shanno (BFGS) algorithm²⁵ is inserted to ensure the optimization of the crystal's geometry. The “stress–strain” concept,²⁶ along with 0.003 strain amplitude, was used to compute the elastic constants of the NCS compounds. The convergence tolerance factors for the crystal geometry optimization were parameterized as follows; energy, maximum force, maximum stress, and maximum displacement: 10^{−5} eV per atom, 0.03 eV Å^{−1}, 0.05 GPa, 0.001 Å, respectively.

3. Results and discussion

3.1. Structural properties

Fig. 1 illustrates the structural configurations of the TaIr₂B₂ and NbIr₂B₂ superconductors, which possess a monoclinic system with *Cc* (no. 9) space group.² The GGA-PBE and LDA-CA-PZ optimized lattice parameters of these Ir-based compounds are presented in Table 1 with the experimental report. The GGA and LDA calculated lattice parameters of the NCS compounds both show good agreement with previous experimental and theoretical reports, supporting the accuracy of this study.^{2,4} Table 1 shows that the lattice constants, *a*, *b*, and *c* of GGA (LDA) are slightly larger (lower) compared to that of the experimental report,² which is a familiar trend of these XC functionals.^{14–16} Consequently, the cell volume (*V*) of the GGA approach reveals a larger value than that of LDA. LDA is known to exhibit an overbinding crystal, resulting in smaller lattice constants and higher bulk moduli. Conversely, GGA tends to reveal an underbinding crystal, consequently resulting in lattice expansions (larger lattice constants) and smaller bulk moduli.^{14–16} However, the arithmetic average values of GGA and LDA of the lattice parameters are much closer to the experimental observation, as presented in Table 1. The present calculated atomic positions of these NCS compounds are summarized in Table 2, and are in good agreement with a previous analysis.² The GGA-optimized values of the atomic positions of both compounds are slightly different from those of LDA.

3.2. Mechanical properties

The elastic parameters of the Ir-based superconductors TaIr₂B₂ and NbIr₂B₂ have not been reported yet in the previous literature to the best of our knowledge. The elastic constants are necessary to determine the mechanical stability, bonding nature, melting temperature, and anisotropy characteristics of a newly synthesized material. The monoclinic systems TaIr₂B₂ and NbIr₂B₂ have 13 independent elastic constants, *C*₁₁, *C*₂₂, *C*₃₃, *C*₄₄, *C*₅₅, *C*₆₆, *C*₁₂, *C*₁₃, *C*₂₃, *C*₁₅, *C*₂₅, *C*₃₅, and *C*₄₆, as presented in Table 2. A monoclinic system is said to be mechanically stable if it justifies the following elastic stability conditions:¹⁵

$$\begin{aligned} C_{11} > 0, C_{22} > 0, C_{33} > 0, C_{44} > 0, C_{55} > 0, C_{66} > 0, \\ [C_{11} + C_{22} + C_{33} + 2(C_{12} + C_{13} + C_{23})] > 0, (C_{33}C_{55} - C_{35}^2) > 0, \\ (C_{44}C_{66} - C_{46}^2) > 0, (C_{22} + C_{33} - 2C_{23}) > 0, \\ [C_{22}(C_{33}C_{55} - C_{35}^2) + 2(C_{23}C_{25}C_{35} - C_{23}^2C_{55} - C_{25}^2C_{33})] > 0, \end{aligned}$$



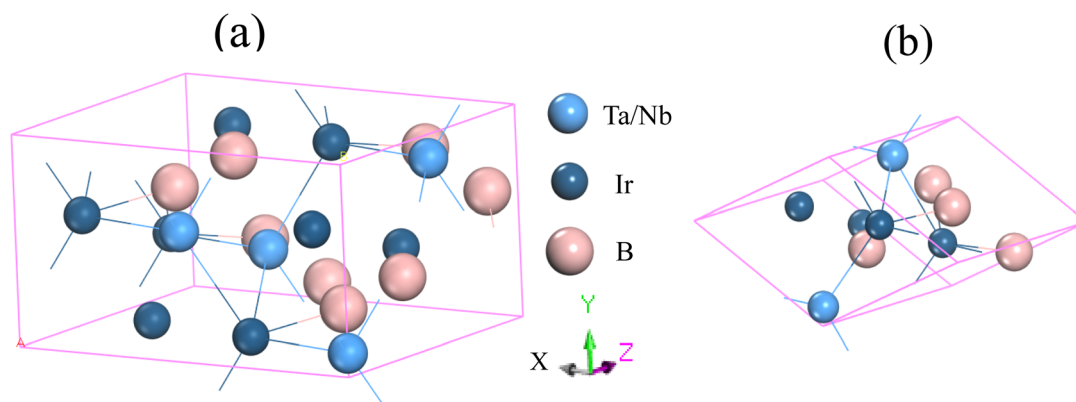


Fig. 1 Structural configuration of the (a) conventional cell and (b) primitive cell of the TaIr_2B_2 and NbIr_2B_2 compounds.

$$\{2[C_{15}C_{25}(C_{33}C_{12} - C_{13}C_{23}) + C_{15}C_{35}(C_{22}C_{13} - C_{12}C_{23}) + C_{25}C_{35}(C_{11}C_{23} - C_{12}C_{13})] - [C_{15}^2(C_{22}C_{33} - C_{23}^2) + C_{25}^2(C_{11}C_{33} - C_{13}^2) + C_{35}^2(C_{11}C_{22} - C_{12}^2)] + C_{55}(C_{11}C_{22}C_{33} - C_{11}C_{23}^2 - C_{22}C_{13}^2 - C_{33}C_{12}^2 + 2C_{12}C_{13}C_{23})\} > 0.$$

Both NCS TaIr_2B_2 and NbIr_2B_2 materials are mechanically stable, as validated by the above-written stability criteria. The dynamical stability of NbIr_2B_2 is observed through phonon dispersion calculation and displayed in ESI (Fig. S1†). The dynamical stability of TaIr_2B_2 can also be found following the similar procedure as discussed in the supplementary file. It can be seen from Table 3 that the LDA optimized values of the elastic constants of both compounds are notably higher compared to that of GGA with a few exceptions, in which the elastic constants are negative (as in C_{15} , C_{25} , and C_{46}). In the case of C_{15} , C_{25} , and C_{46} , the GGA and LDA functionals calculated values that are approximately close to each other. GGA provides lattice constants of higher value, and consequently provides elastic constants of lower value in comparison with LDA.^{15,27} Therefore, the arithmetic average values of the GGA-PBE and LDA-CA functionals were determined to achieve a better approximation of these elastic constants. The arithmetic average of GGA and LDA reveals that the elastic constants of three principal axes, C_{11} , C_{22} , and C_{33} , are not equal to each other ($C_{11} \neq C_{22} \neq C_{33}$), which indicates a direction-dependent

behavior (anisotropic nature) among these principal axes.^{28,29} The difference between C_{12} and $C_{44}(C_{12} - C_{44})$ is noted as Cauchy Pressure (CP), which is an indicator of the ductile/brittleness property of a material.³⁰ A ductile (brittle) material will have a positive (negative) CP value. Both Ir-based NCS compounds show positive CP, and hence possess ductile characteristics. This malleability nature has been clarified in this study by calculating the Poisson's ratio (ν) and Pugh ratio (B/G). The elastic constants are necessary to determine the elastic moduli of a substance, which measure the ability of a substance to withstand applied stress. The elastic moduli are determined using the averaging schemes of Voigt–Reuss–Hill (VRH).¹⁵

In the formulas of the elastic moduli, B stands for the bulk modulus, and G is the shear modulus. The subscripts V and R indicate Voigt and Reuss bound, respectively. The Hill approximation is indicated by the subscript H. Another elastic modulus termed as the Young's modulus (E) is calculated using the values of B and G via the given equation:¹⁵

$$E = \frac{9BG}{3B + G}. \quad (1)$$

The elastic moduli B and G are also used to calculate the Poisson's ratio through the following equation:¹⁵

$$\nu = \frac{3B - 2G}{6B + 2G}. \quad (2)$$

Table 1 Calculated structural parameters and their deviations (Dev.) from the experimental results of the NCS TaIr_2B_2 and NbIr_2B_2 compounds

Material	Functional	a (Å)	Dev. (%)	b (Å)	Dev. (%)	c (Å)	Dev. (%)	β (°)	Dev. (%)	V (Å ³)	Dev. (%)
TaIr_2B_2	GGA-PBE	8.2734	1.73	4.8531	1.89	6.0771	0.93	102.10	0.09	238.58	4.65
	LDA-CA	8.0783	0.67	4.7230	0.84	5.9839	0.61	102.40	0.20	222.98	2.19
	Ave.	8.1758	0.53	4.7880	0.52	6.0305	0.16	102.25	0.06	230.78	1.23
	Exp. ²	8.1328	—	4.7631	—	6.0208	—	102.19	—	227.97	—
	GGA ⁴	8.193	—	4.788	—	6.102	—	—	—	—	—
NbIr_2B_2	GGA-PBE	8.2075	0.64	4.8111	0.82	6.0753	0.84	102.33	0.03	234.36	2.31
	LDA-CA	8.0753	0.97	4.7315	0.84	5.9950	0.49	102.39	0.09	223.72	2.33
	Ave.	8.1414	0.16	4.7713	0.01	6.0351	0.17	102.36	0.06	229.04	0.004
	Exp. ²	8.1548	—	4.7718	—	6.0246	—	102.30	—	229.05	—
	GGA ⁴	8.213	—	4.799	—	6.079	—	—	—	—	—



Table 2 The present DFT-optimized atomic positions of the TaIr₂B₂ and NbIr₂B₂ compounds

Atom	TaIr ₂ B ₂			NbIr ₂ B ₂		
	x	y	z	x	y	z
Ta1/Nb1 (GGA)	0.00051	0.10785	0.00338	0.00945	0.11053	0.00403
Ta1/Nb1 (LDA)	0.00059	0.11016	0.00363	0.00900	0.11077	0.00355
Ir1 (GGA)	0.19293	0.61196	0.18773	0.20293	0.61353	0.18902
Ir1 (LDA)	0.19444	0.61455	0.18889	0.20323	0.61439	0.18945
Ir2 (GGA)	0.34715	0.10719	0.09714	0.35592	0.11017	0.09786
Ir2 (LDA)	0.34753	0.11210	0.09693	0.35562	0.11160	0.09728
B1 (GGA)	0.01531	0.37317	0.35376	0.02270	0.36925	0.35360
B1 (LDA)	0.01381	0.37051	0.35265	0.02259	0.37098	0.35373
B2 (GGA)	0.20167	0.19627	0.35652	0.20917	0.19340	0.35675
B2 (LDA)	0.20120	0.19210	0.35643	0.20973	0.19371	0.35726

The Pugh ratio is calculated using the ratio of B/G . The obtained values of B , G , E , B/G , and ν are listed in Table 4. As the GGA calculation provides elastic constants of higher value, it consequently shows elastic moduli of higher value compared to that of LDA. The bulk modulus reflects the ability of a material to resist the volume deformation (fracture) under compression. Meanwhile, the shear modulus indicates the ability to resist shear deformation (plastic deformation).

The lower (higher) value of the bulk modulus of a material indicates that it is easy (difficult) to compress. Table 4 shows that the GGA and LDA arithmetic average values of the bulk modulus are higher (lower compressibility) in TaIr₂B₂ compared to that of NbIr₂B₂. Therefore, the volume deformation of TaIr₂B₂ under compression is expected to be difficult compared to that of NbIr₂B₂. This type of behavior of the Ta and Nb analogs was also observed in previous literature studies for the Rh-based NCS compounds, TaRh₂B₂ and NbRh₂B₂.^{12,13} The Ta-analog TaIr₂B₂ also revealed a higher G compared to NbIr₂B₂, which indicates that the shear deformation is easier in NbIr₂B₂ compared to TaIr₂B₂. The higher G value of TaIr₂B₂ is also an indication of its higher hardness nature in comparison with NbIr₂B₂. For both compounds, Table 4 shows $B > G$, which indicates that the volume deformation is difficult in both compounds compared to the shear deformation. The ratio of B and G is also a useful parameter to determine the ductile/brittleness nature of a material. When the value of B/G is higher (lower) than the critical value of 1.75, the material is termed as having a ductile (brittle) property.³¹ Both Ir-based NCS compounds show a B/G ratio that is significantly higher

than the critical value, indicating their ductile nature. The ductile nature of the Ir-based NCS compounds is also greater compared to the Rh-based NCS compounds, TaRh₂B₂ and NbRh₂B₂. NbIr₂B₂ shows a higher malleability nature compared to TaIr₂B₂ as a consequence of the lower G possessed by NbIr₂B₂ compared to TaIr₂B₂. The malleability nature of the Ir-based NCS compounds can be further clarified by the analysis of Poisson's ratio. The critical value of Poisson's ratio for ductile/brittleness characteristics is 0.26. A value that is higher (lower) than this indicates that the material has ductile (brittle) characteristics.³² The analysis of ν also justifies the result of the Pugh ratio and CP, *i.e.*, both compounds have ductile properties. The highest values of ν are found to be 0.344 for NbIr₂B₂ and 0.330 for TaIr₂B₂ using the GGA-PBE functional, which are somewhat higher than those of the Rh-based compounds NbRh₂B₂ ($\nu = 0.31$) and TaRh₂B₂ ($\nu = 0.30$).^{12,13}

The Vickers hardness (H_v) of the NCS compounds is estimated by the following model from Chen *et al.*:³³

$$H_v = 2(K^2G)^{0.585} - 3. \quad (3)$$

where, $K = \frac{G}{B}$.

The maximum value of H_v is estimated to be 9.15 GPa for TaIr₂B₂ and 7.02 GPa for NbIr₂B₂ with the LDA functional. TaIr₂B₂ exhibits a higher H_v compared to NbIr₂B₂ as a result of the higher values of G occupied by TaIr₂B₂ in comparison with NbIr₂B₂.

Table 3 Computed elastic constants of the TaIr₂B₂ and NbIr₂B₂ compounds

Material	Functional	C_{11}	C_{22}	C_{33}	C_{44}	C_{55}	C_{66}	C_{12}	C_{13}	C_{15}	C_{23}	C_{25}	C_{35}	C_{46}
TaIr ₂ B ₂	GGA-PBE	499.73	475.42	472.70	65.51	151.95	142.20	182.79	228.32	−14.59	251.77	−9.49	9.56	−4.39
	LDA-CA	577.81	557.09	544.04	88.42	180.72	163.75	219.28	269.39	−14.97	288.43	−9.50	12.45	−6.49
	Ave.	538.77	516.25	508.37	76.96	166.33	152.97	201.03	248.85	−14.78	270.10	−9.49	11.00	−5.44
NbIr ₂ B ₂	GGA-PBE	466.09	452.75	471.82	65.15	150.68	92.85	186.99	231.68	−15.41	250.21	−3.79	10.02	0.09
	LDA-CA	531.24	518.72	526.58	75.82	169.64	117.59	207.67	262.78	−15.28	281.08	−3.87	11.01	−1.99
	Ave.	498.66	485.73	499.20	70.48	160.16	105.22	197.33	247.23	−15.34	265.64	−3.83	10.51	−0.95

Table 4 Calculated elastic moduli (B , G , and E), compressibility ($1/B$), Poisson's ratio (ν), machinability index (μ_M), and universal anisotropy factor (A^U) of the TaIr_2B_2 and NbIr_2B_2 compounds

Material	Functional	B_V (GPa)	B_R (GPa)	B (GPa)	$1/B$ (GPa^{-1})	G_V (GPa)	G_R (GPa)	G (GPa)	E (GPa)	B/G	ν	μ_M	A^U
TaIr_2B_2	GGA-PBE	308.18	307.35	307.76	0.00325	124.26	111.33	117.79	313.40	2.61	0.330	4.70	0.583
	LDA-CA	359.24	358.72	358.98	0.00279	146.70	135.77	141.23	374.58	2.54	0.326	4.06	0.404
	Ave.	333.71	333.03	333.37	0.00302	135.48	123.55	129.51	343.99	2.57	0.328	4.38	0.494
NbIr_2B_2	GGA-PBE	303.15	301.46	302.31	0.00331	109.86	100.11	104.98	282.28	2.88	0.344	4.64	0.492
	LDA-CA	342.18	340.70	341.44	0.00293	127.61	117.13	122.37	327.93	2.79	0.340	4.50	0.452
	Ave.	322.66	321.08	321.87	0.00312	118.73	108.72	113.67	305.10	2.83	0.342	4.57	0.472

The capability of a material to resist longitudinal stress is assessed by the value of the Young's modulus. The higher Young's modulus value of a material is also an indication of its higher stiffness. TaIr_2B_2 exhibits a higher value of E in comparison with NbIr_2B_2 , which indicates its higher capability to withstand the longitudinal stress of the TaIr_2B_2 compound compared to that of NbIr_2B_2 .

The estimation of the ease/difficulty of the device fabrication of a material is required for engineering applications, which can be known by the parameter machinability index, $\mu_M = \frac{B}{C_{44}}$.³⁴

The elastic constant C_{44} indicates the ability to withstand the shear deformation. The higher μ_M value of a material indicates the greater ease for fabricating it into the required shape. Generally, a hard (soft) material possesses a lower (higher) μ_M value. The hardest material diamond possesses a μ_M of about 0.8, and the softest one aluminum possesses a μ_M of about 2.6.³⁴ Both studied Ir-based compounds show much higher μ_M than the softest aluminum. The machinability of these Ir-based compounds is also significantly higher compared to the Rh-based NCS compounds, TaRh_2B_2 ($\mu_M = 2.22$) and NbRh_2B_2 ($\mu_M = 2.40$). The GGA-PBE calculation shows that the machinability values of TaIr_2B_2 and NbIr_2B_2 are approximately close to each other. However, LDA-CA exhibits a notably higher machinability in the case of NbIr_2B_2 compared to TaIr_2B_2 . The arithmetic average values of the GGA and LDA calculations of μ_M are 4.38 and 4.57 for TaIr_2B_2 and NbIr_2B_2 , respectively. The higher malleability nature of NbIr_2B_2 (as observed from the Cauchy pressure, Pugh ratio, and Poisson's ratio) might be the result of the higher machinability of this Nb-analog compared to TaIr_2B_2 .

The elastic anisotropy is a useful parameter for engineering applications of a material. It provides information regarding the emergence of possible microcracks in the materials under external stress. Therefore, it is very important to know the degree of anisotropy of a material before fabricating devices. The universal anisotropy factor, A^U , is a well-known parameter for the analysis of the anisotropy nature. It is determined using the values of the Voigt and Reuss bulk and shear modulus *via* the following equation:³⁵

$$A^U = \frac{5G_V}{G_R} + \frac{B_V}{B_R} - 6. \quad (4)$$

The isotropic crystal has a value of $A^U = 0$; any deviations from zero indicates an anisotropic nature. It can be clearly seen from Table 4 that both NCS phases have an anisotropic nature.

3.3. Debye temperature and melting temperature

The Debye temperature, Θ_D , is a crucial thermo-physical characteristic of solids, which is closely connected with other various significant parameters, such as stiffness constants, lattice vibration, specific heat, melting temperature, thermal expansion, and superconducting transition temperature. The Θ_D defines the maximum frequency mode of the vibrations. The Θ_D can be estimated by several approaches. In this investigation, the Θ_D is determined by the use of elastic moduli. The Θ_D can be found by the following well-known expression from Anderson:³⁶

$$\Theta_D = \frac{h}{k_B} \left[\frac{3n}{4\pi} \left(\frac{N_A \rho}{M} \right) \right]^{\frac{1}{3}} v_m, \quad (5)$$

$$v_m = \left[\frac{1}{3} \left(\frac{2}{v_t^3} + \frac{1}{v_l^3} \right) \right]^{-\frac{1}{3}}, \quad (6)$$

$$v_l = \left(\frac{3B + 4G}{3\rho} \right)^{\frac{1}{2}}, \quad (7)$$

$$v_t = \left(\frac{G}{\rho} \right)^{\frac{1}{2}}. \quad (8)$$

where v_t , v_l , v_m , h , n , N_A , ρ , k_B , and M denote the transverse sound velocity, longitudinal sound velocity, mean sound velocity, Planck's constant, number of atoms in the molecule, Avogadro's number, crystal density, Boltzmann's constant, and molecular mass, respectively. The determined values of v_t , v_l , v_m , ρ , and Θ_D are listed in Table 5. Both GGA and LDA calculations show a somewhat higher value of Θ_D for NbIr_2B_2 compared to that of TaIr_2B_2 . The arithmetic average values of Θ_D are 406 and 412 K for TaIr_2B_2 and NbIr_2B_2 , respectively. These values are notably higher, but follow a similar trend with the experimental observation of 230 K for TaIr_2B_2 and 274 K for NbIr_2B_2 .² The calculated values of hardness show that TaIr_2B_2 is harder in comparison with NbIr_2B_2 . Generally, the higher hardness/stiffness material is expected to exhibit higher Θ_D than a lower hardness material.¹⁵ Typically, the higher hardness



materials exhibit higher sound velocities as the tighter lattices propagate oscillations faster. It is interesting to note that the present study and the previous experimental observation both show a higher Θ_D value for NbIr₂B₂ in comparison with TaIr₂B₂. In previous GGA calculations, the Rh-based Nb-analog NbRh₂B₂ ($\Theta_D = 512$ K) also showed a higher Θ_D value, but lower hardness compared to that of the Ta-analog TaRh₂B₂ ($\Theta_D = 480$ K), which supports the present analysis.¹² In a recent report, Hossain and his coworkers also found a higher Θ_D value (but lower hardness) in the boron-rich compound B₆S compared to that of B₆Se.³⁷ Although the atoms involved in these materials are not that much different, their molecular masses are not the same. Moreover, their bonding distribution and variation of different elastic constants to different ranges can be the reason for the higher hardness, but lower Debye temperature.

The melting temperature is another vital thermo-physical parameter to evaluate the applicability of a material in high temperature technology. The temperature at which a solid starts to transfer its state to the liquid phase is specified as the melting temperature (T_m). T_m reflects the bond strength of a solid substance. The stiffness constants C_{11} and C_{33} are used to evaluate the T_m . C_{11} and C_{33} are related to uniaxial stress. The equation of T_m is formulated as follows:³⁸

$$T_m = 354 + 4.5 \frac{2C_{11} + C_{33}}{3}. \quad (9)$$

TaIr₂B₂ exhibits a higher T_m than NbIr₂B₂ because the Ta-analog possesses higher stiffness constants C_{11} and C_{33} , along with a higher Young's modulus, reflecting the higher bond strength in the Ta-analog. The highest value of T_m is estimated to be 2903 K and 2737 K for TaIr₂B₂ and NbIr₂B₂, respectively, with the LDA functional. In comparison, T_m is found to be 2562 K and 2460 K for TaIr₂B₂ and NbIr₂B₂, respectively, with GGA. The T_m of these two Ir-based NCS phases are notably higher compared to that of the Rh-based NCS phases, TaRh₂B₂ ($T_m = 2302$ K) and NbRh₂B₂ ($T_m = 2194$ K).¹² Therefore, it can be predicted that the studied Ir-based NCS phases would be much more efficient in high temperature applications than the Rh-based NCS phases TaRh₂B₂ and NbRh₂B₂. Both studied NCS phases show higher machinability along with higher T_m compared to aluminum. Generally, highly machinable

materials are expected to reveal lower T_m . However, the masses involved in the NCS compounds and aluminum are not the same. The bonding distribution, along with the variation of different elastic constants to different ranges, can also be the reason for such behavior. For example, we know that the machinability index is directly connected with the bulk modulus B and shear elastic constant C_{44} . The variation of B and C_{44} in aluminum and the studied NCS compounds is not the same. The elastic properties of aluminum have been reported elsewhere.³⁹ Further investigation on the mechanical and thermophysical properties of this type of NCS compounds can provide more clarity. For this purpose, we believe that these DFT investigations on the NCS compounds will be a useful resource to researchers in this field.

3.4. Electronic properties

Uncovering the technological applications of a newly synthesized material are largely dependent on the behavior of the conduction and valence electrons. Therefore, it is necessary to have a clear understanding of the electronic band structure and the density of states (DOS) of a compound. The electronic configuration of a compound relies on the energy dispersion of the valence and conduction electrons within the Brillouin zone. The calculated electronic band structures of TaIr₂B₂ and NbIr₂B₂ are presented in Fig. 2(a) and (b) using GGA-PBE towards high-symmetry directions inside the first Brillouin zone. The broken (red) line at the zero-energy scale indicates the Fermi level (E_F). The energy band above (below) the E_F is the conduction band (valence band). From the band structure, it can be seen that two bands with varying levels of energy dispersion clearly cross the E_F . This overlap of the valence and conduction bands at the E_F indicate the metallic character. The electronic band configurations of the Ir-based NCS superconductors with and without spin-orbit (SO) coupling were also analyzed by Górnicka *et al.*² They observed the splitting of the energy bands for the addition of SO, and the deficiency of inversion symmetry.

The total DOS and Partial DOS of these Ir-based compounds have been analyzed to gain insight into the electronic configuration. The DOS of both NCS compounds precisely appears and is finite at E_F , which is expected for a metallic system, as exhibited in Fig. 3. The values of the total DOS are found to be

Table 5 The estimated values of the crystal density (ρ), longitudinal sound velocity (v_l), transverse sound velocity (v_t), mean sound velocity (v_m), Debye temperature (Θ_D), melting temperature (T_m), DOS at the Fermi level per formula unit, $N(E_F)$, Sommerfeld electronic specific heat (γ), and electron-phonon coupling constant (λ) of the TaIr₂B₂ and NbIr₂B₂ compounds

Material	Functional	ρ (g cm ⁻³)	v_l (m s ⁻¹)	v_t (m s ⁻¹)	v_m (m s ⁻¹)	Θ_D (K)	T_m (K)	$N(E_F)$, (states per eV per f.u.)	γ (mJ K ⁻² mol ⁻¹)	λ
TaIr ₂ B ₂	GGA-PBE	16.34	5333	2684	3009	391	2562	1.68	3.96	0.60
	LDA-CA	17.49	5787	2841	3190	425	2903	1.43	3.37	0.59
	Ave.	16.91	5560	2762	3099	408	2732	1.55	3.66	0.60
	Exp. ²	—	—	—	—	230	—	2.06	5.2	0.70
NbIr ₂ B ₂	GGA-PBE	14.14	5592	2724	3060	401	2460	1.78	4.20	0.65
	LDA-CA	14.81	5837	2874	3226	429	2737	1.60	3.78	0.64
	Ave.	14.47	5714	2799	3143	415	2598	1.69	3.99	0.65
	Exp. ²	—	—	—	—	274	—	2.14	4.9	0.74



1.68 states per eV per f.u. (GGA-PBE), 1.43 states per eV per f.u. (LDA-CA) for TaIr_2B_2 , and 1.78 states per eV per f.u. (GGA-PBE), 1.60 states per eV per f.u. for NbIr_2B_2 . This DOS analysis reveals that Nb (analog) possesses higher DOS values compared to Ta (analog). Moreover, the GGA-PBE functional provides a larger DOS value in comparison with LDA-CA. This type of behavior of these two functionals while calculating DOS was also observed in such study.²⁷ However, the shape of the DOS curves is approximately the same for these two different functionals. The value of DOS (with SO) was found to be 2.06 states per eV per f.u. for TaIr_2B_2 and 2.14 states per eV per f.u. for NbIr_2B_2 in an earlier report,² showing reasonable agreement with this study.

The values for the partial density of states of TaIr_2B_2 and NbIr_2B_2 are calculated and displayed in Fig. 4(a) and (b), respectively. In the case of the Ta-analog, the Ta-5d, Ir-5d states are the most dominant in increasing DOS at and near E_F , along with a noticeable involvement from the B-2p state. The Ta-5p, Ta-6s, Ir-5p, Ir-6s, and B-2s states reveal a negligible contribution to DOS at E_F . A similar type of behavior is noticed for the Nb-analog. At and around the E_F , the d-orbital contributions (Nb-4d and Ir-5d states) are the most dominant in generating DOS. The B-2p state has a significant contribution to increasing DOS at and near the E_F . The overhead of the valence band (valence band near E_F) is greatly dominated by the Ir-5d state for both TaIr_2B_2 and NbIr_2B_2 compounds.

3.5. Electronic specific heat coefficient and electron–phonon coupling constant

The Sommerfeld electronic specific heat indicator, γ , is estimated using the value of $N(E_F)$ through the following widely used equation,^{40,41}

$$\gamma = \frac{\pi^2 k_B^2 N(E_F)}{3} \quad (10)$$

In this analysis, the GGA calculation reveals the higher value of γ compared to that of LDA. This is a result of the higher value of $N(E_F)$ in the GGA calculation than LDA. The calculated value

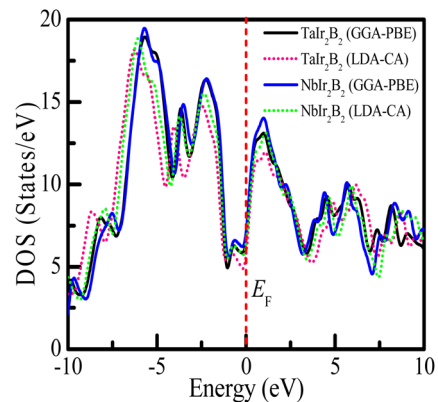


Fig. 3 Density of states of the TaIr_2B_2 and NbIr_2B_2 compounds using GGA-PBE and LDA-CA-PZ.

of γ is estimated to be 3.96 (3.37) and 4.2 (3.78) $\text{mJ K}^{-2} \text{mol}^{-1}$ for TaIr_2B_2 and NbIr_2B_2 using GGA (LDA), respectively.

The coupling between the electron and phonon is described by the parameter electron–phonon coupling constant, $\lambda_{\text{el-ph}}$, which has a crucial impact for superconducting materials. The $\lambda_{\text{el-ph}}$ has a close relationship with the superconducting transition temperature, T_c . In this study, the $\lambda_{\text{el-ph}}$ is calculated using the value of the experimental T_c , and presents the calculated Debye temperature *via* the following inverted McMillan equation,⁴²

$$\lambda_{\text{el-ph}} = \frac{1.04 + \mu^* \ln\left(\frac{\theta_D}{1.45T_c}\right)}{(1 - 0.62\mu^*) \ln\left(\frac{\theta_D}{1.45T_c}\right) - 1.04} \quad (11)$$

where the parameter μ^* is termed as the Coulomb pseudo potential, an adjustable parameter. Typically, its value ranges between $0.1 \leq \mu^* \leq 0.15$. In this calculation, the value of μ^* was taken at 0.13 for evaluating $\lambda_{\text{el-ph}}$ for both Ir-based NCS superconductors. Górnicka and his coworkers found the value of $\lambda_{\text{el-ph}} = 0.70$ for TaIr_2B_2 and $\lambda_{\text{el-ph}} = 0.74$ for NbIr_2B_2 , and they recommended these Ir-based superconductors as strongly or

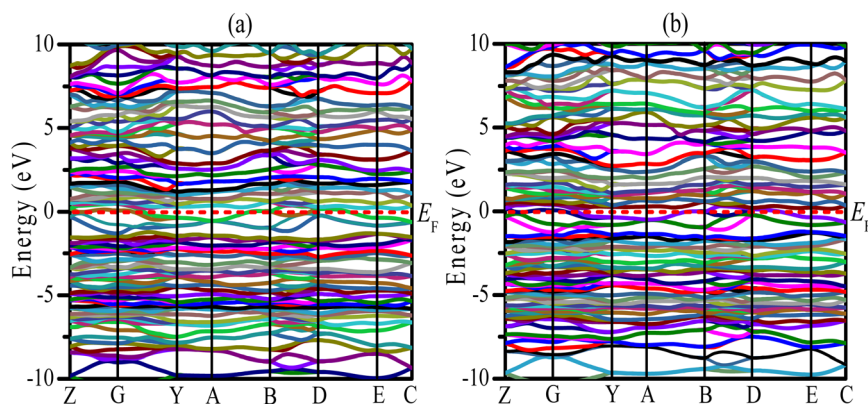


Fig. 2 Electronic band structures of the (a) TaIr_2B_2 and (b) NbIr_2B_2 compounds using GGA-PBE.



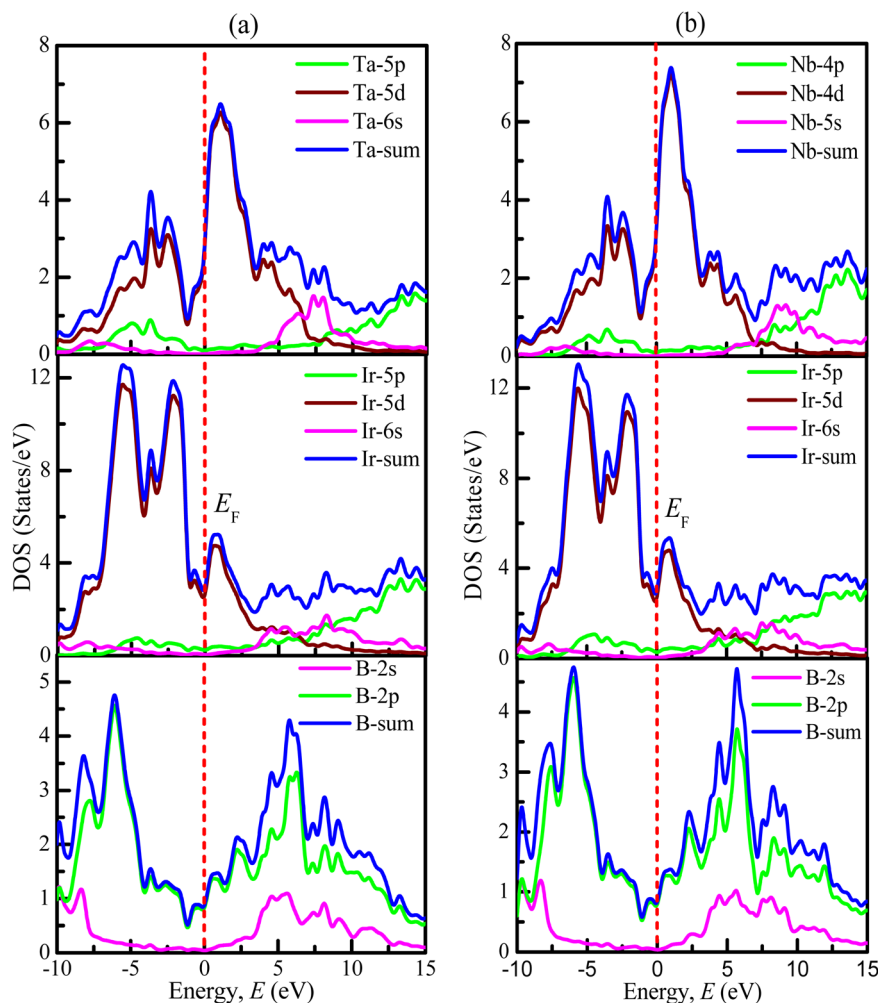


Fig. 4 Calculated partial density of states for the (a) TaIr_2B_2 and (b) NbIr_2B_2 compounds.

moderately coupled superconductors. The present estimated values of $\lambda_{\text{el-ph}}$ of both NCS superconductors are somewhat lower (presented in Table 5), but show reasonable agreement with the previous experimental report.²

3.6. Optical properties

The analysis of optical functions is very important toward determining the potential practical applications of a material. The study of optical functions is also necessary to justify the electronic structure of a newly synthesized material. The optical and electronic purpose applications of a new material can be designed through a clear understanding of the optical response of the material to photon energy. Therefore, the optical responses of TaIr_2B_2 and NbIr_2B_2 materials along different energy regions, such as infrared, visible, and ultraviolet, have been uncovered in this study using two different functionals GGA-PBE and LDA-CA-PZ. These two functionals are used to exhibit the precision of the study and the effect of the functional. This study reveals the fundamental optical parameters, such as the optical conductivity (σ), optical absorption (α), reflectivity (R), loss function (LF), and real (ϵ_1) and imaginary

(ϵ_2) parts of the dielectric functions along the [100] polarization direction. A plasma energy of 5 eV along with 0.05 eV Drude damping was used during the analysis of optical functions, as a plasma energy between the scale of 2–10 eV is suggested as reasonable for a metallic system.

The profile of the optical conductivity (real-part) of TaIr_2B_2 and NbIr_2B_2 is depicted in Fig. 5(a). The optical conductivity is related in a greater way with the photon absorption capability of a material.^{27,43} The highest peak of conductivity is observed to be at zero photon energy, an indication of a metallic system, which then abruptly decreases and further increases sharply in the visible region. A sharp notable peak of conductivity is found to be at 2.55 eV of photon energy. Then, with the increase of photon energy, the spectra of conductivity start to fall down in a regular way with few small peaks. The LDA functional shows a somewhat higher peak of conductivity spectra in the visible region, as well as in the high energy region, compared to that of GGA. However, the effect of these two XC functionals on conductivity spectra are not very notable, which is also revealed in such calculation.²⁷



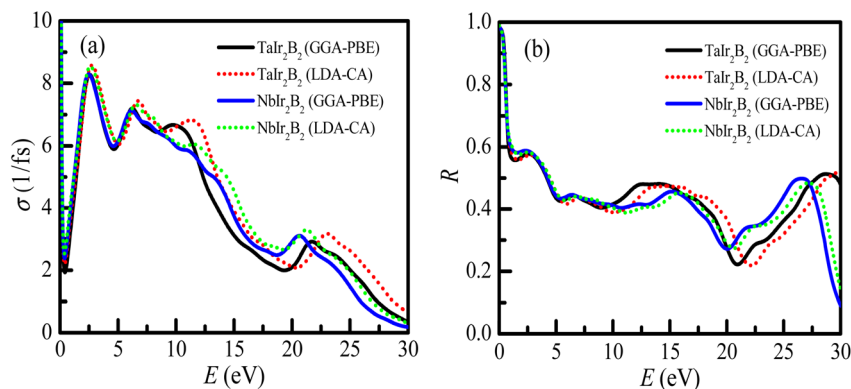


Fig. 5 (a) Optical conductivity and (b) reflectivity of the TaIr_2B_2 and NbIr_2B_2 compounds.

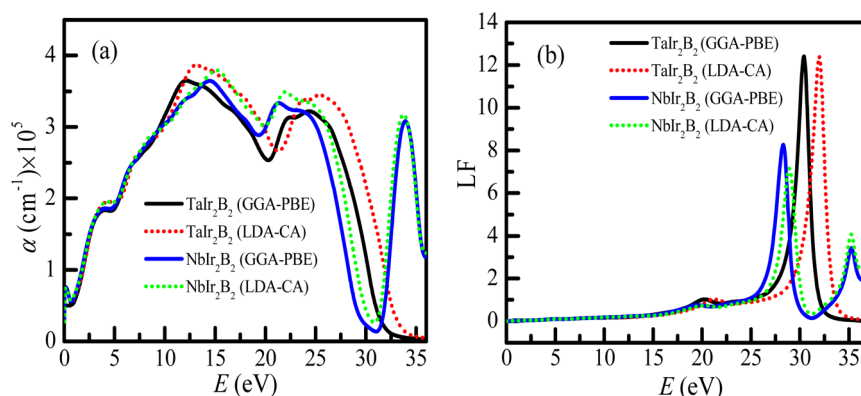


Fig. 6 (a) Optical absorption profiles, and (b) loss function of the TaIr_2B_2 and NbIr_2B_2 compounds.

The reflectivity (R) indicates the suitability of a material to be used as a reflector. The reflectivity spectra of these compounds are depicted in Fig. 5(b), up to 30 eV of photon energy. Both Ir-based compounds show prominent reflectivity in the infrared region, as well as in the wide range of the visible energy region. The reflectivity spectra of both compounds are almost similar at up to ~ 10 eV of photon energy for both GGA-PBE and LDA-CA functionals.

The optical absorption scheme of the Ir-based compounds is depicted in Fig. 6(a). The absorption coefficient (α) reflects the capability of a material to absorb photon energy while passing through it. From Fig. 6(a), it can be observed that both compounds possess no optical band gap, which reveals their metallic behavior. The absorption curves of both compounds approximately merge up to ~ 11 eV. It is interesting to note that the absorption spectra of the LDA-CA functional are somewhat high above ~ 12 eV compared to the GGA-PBE functional for both compounds. Both compounds show a notable optical absorption of ultra-violet (UV) energy. Hence, they can be used as UV absorbers. This type of behavior of these two functional is also observed in a previous study of the Kagome superconductor.²⁷ The absorption spectra of TaIr_2B_2 sharply falls at ~ 30 eV (plasma energy as observed from the loss function curve). Consequently, both compounds tend to be transparent to electromagnetic radiation at this energy. Such behavior is

also observed in Rh-based NCS superconductors.^{12,13} However, an extra absorption peak is observed at ~ 35 eV for the NbIr_2B_2 compound, and then the absorption spectra drop further. This extra absorption peak of NbIr_2B_2 might be the result of an additional peak of the loss function at around 35 eV of photon energy, as observed in Fig. 6(b).

The loss function (LF) profile of the NCS compounds is presented in Fig. 6(b). The LF provides an idea about the energy loss of high energy electrons while going through a material.²⁷ These high energy electrons are attenuated and consequently generate plasma excitations (plasmons). The peak of the loss function becomes high when the energy of fast-moving electrons matches with the frequency of the plasma excitation (known as the plasma frequency). The studied NCS superconductors will act as a transparent material (metallic to dielectric-like response) above the plasma energy. For TaIr_2B_2 , the highest peak of LF is observed at ~ 30 eV (plasma energy). In the case of NbIr_2B_2 , the sharp peak of the loss function is noticed at ~ 28 eV. However, another small peak is observed at around 35 eV of photon energy in the case of NbIr_2B_2 , which is the reason for the notable absorption peak at such high energy.

The real (ϵ_1) and imaginary parts (ϵ_2) of the dielectric function of the Ir-based NCS compounds are presented in Fig. 7a and b, respectively. The behaviors of the ϵ_1 and ϵ_2 spectra of the Ir-based NCS compounds reveal their metallic properties, and



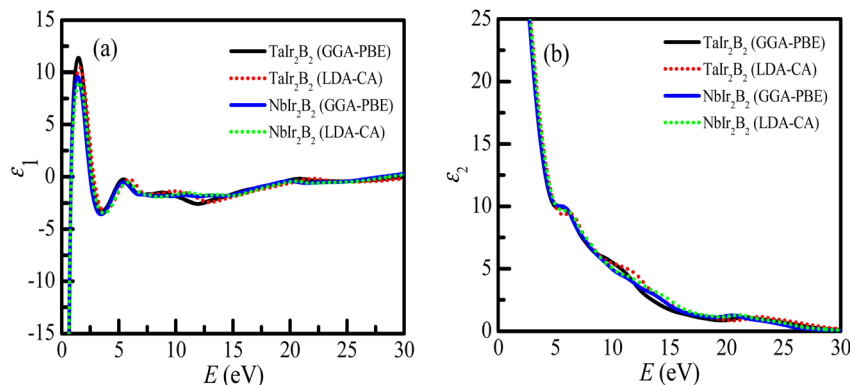


Fig. 7 (a) Real part of the dielectric function, and (b) imaginary part of the dielectric function of the TaIr_2B_2 and NbIr_2B_2 compounds.

follow a similar trend with the Rh-based NCS superconductors TaRh_2B_2 and NbRh_2B_2 compounds.^{12,13} Both NCS phases exhibit almost similar behavior. At the low energy region, $\epsilon_1 < 0$, justifying the metallic property of the NCS compounds. The curve of ϵ_1 appears sharply at 1.55 eV of photon energy. In the high energy regions, the ϵ_1 of both NCS compounds trend to be unity, whereas the ϵ_2 values are negligible. This behavior further reveals that both compounds might be used as transparent materials in the high energy region, as justified from the optical absorption and loss function profiles. However, in the whole energy region, the GGA-PBE and LDA-CA functionals both reveal similar spectra of the dielectric functions that is almost functionally independent.

4. Conclusions

The DFT calculations were performed to uncover the diverse fundamental physical properties of the Ir-based NCS compounds TaIr_2B_2 and NbIr_2B_2 using GGA and LDA functionals by running the CASTEP code. In addition, a comprehensive analysis is presented in this literature between the two GGA and LDA exchange-correlation functionals of the investigated properties. The GGA calculated values of the unit cell volume of both compounds are found to be higher compared to that of LDA, which verifies the affinity of GGA to the under-binding crystal, whereas it is overbinding in LDA. Therefore, the arithmetic averages of the GGA and LDA functionals of the lattice parameters are found to exhibit values that are much closer to the experimental observation. The calculated values of the elastic moduli using GGA are observed to be larger in comparison with the LDA calculation, which is a result of the higher value of lattice constants in the GGA calculation compared to that of LDA. Both NCS compounds justify the criteria of mechanical stability. The analysis of the Cauchy pressure, Pugh ratio and Poisson's ratio ensure that the Ir-based NCS phases TaIr_2B_2 and NbIr_2B_2 have ductile characteristics. The study of the machinability index suggests that both compounds have a significant amount of machinability. These Ir-based NCS compounds are expected to be used in fabricating devices into different desired shapes. The hardness calculations show that TaIr_2B_2 is comparatively harder than NbIr_2B_2 , which

is a result of the higher values of the elastic moduli possessed by TaIr_2B_2 compared to that of NbIr_2B_2 . The highest value of Vicker hardness is found to be 9.15 and 7.02 GPa for TaIr_2B_2 and NbIr_2B_2 , respectively, using the LDA functional. The maximum value of melting temperature is observed to be 2903 and 2737 K for TaIr_2B_2 and NbIr_2B_2 , respectively, using the LDA functional. This result is a consequence of the higher stiffness constants C_{11} and C_{33} , as well as the higher Young's modulus in TaIr_2B_2 compared to that of NbIr_2B_2 . The higher value of melting temperature in the Ta-analog indicates its higher bond strength, along with its applicability in elevated temperature technologies. The GGA and LDA estimated values of the Debye temperature from the elastic moduli of both compounds are found to be higher compared to that of the experimental report. The maximum value of the Debye temperature is estimated to be 425 and 429 K for TaIr_2B_2 and NbIr_2B_2 , respectively, with the LDA calculation. The LDA functional shows a higher Debye temperature in comparison with GGA due to the higher values of the elastic moduli in LDA compared to that of GGA. The analysis of the electronic band structure reveals no gap between the valence and conduction bands, which also justifies the analysis of optical functions. The calculated values of the electron-phonon coupling constant are found to be 0.60 (GGA) and 0.59 (LDA) for TaIr_2B_2 , and 0.65 (GGA) and 0.64 (LDA) for NbIr_2B_2 , which are in good agreement with the previous experimental report. The authors of this study believe that this comprehensive GGA and LDA investigation of the physical properties of NCS superconductors will attract much attention in the exploration of this new class of superconductivity.

Conflicts of interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgements

The authors are grateful to the research cell, NSTU, Noakhali-3814, for providing a research grant (grant number: NSTU-RC-PHY-T-23-208) of the 2023-24 fiscal year for this work. A few



parts of this work were performed using the server facility of ICT cell, NSTU, Noakhali provided by BdREN, UGC, Bangladesh.

References

- 1 H. K. Onnes, The discovery of superconductivity, *Commun. Phys.*, 1911, **12**, 120.
- 2 K. Górnicka, X. Gui, B. Wiendlocha, L. T. Nguyen, W. Xie, R. J. Cava and T. Klimczuk, NbIr₂B₂ and TaIr₂B₂-New low symmetry noncentrosymmetric superconductors with strong spin-orbit coupling, *Adv. Funct. Mater.*, 2021, **31**, 2007960.
- 3 E. M. Carnicom, W. Xie, T. Klimczuk, J. Lin, K. Górnicka, Z. Sobczak, N. P. Ong and R. J. Cava, TaRh₂B₂ and NbRh₂B₂. Superconductors with a chiral noncentrosymmetric crystal structure, *Sci. Adv.*, 2018, **4**, 7969.
- 4 Y. Gao, J. F. Zhang, S. A. Yang, K. Liu and Z. Y. Lu, Topological properties of noncentrosymmetric superconductors TlIr₂B₂ (T = Nb, Ta), *Phys. Rev. B*, 2021, **103**, 125154.
- 5 D. Das, K. Górnicka, Z. Guguchia, J. Jaroszynski, R. J. Cava, W. Xie, *et al.*, Time reversal invariant single-gap superconductivity with upper critical field larger than the Pauli limit in NbIr₂B₂, *Phys. Rev. B*, 2022, **106**, 094507.
- 6 P. Koželj, M. Juckel, A. Amon, Y. Prots, A. Ormeci, U. Burkhardt, *et al.*, Non-centrosymmetric superconductor Th₄Be₃₃Pt₁₆ and heavy-fermion U₄Be₃₃Pt₁₆ cage compounds, *Sci. Rep.*, 2021, **11**, 22352.
- 7 J. Beare, M. Nugent, M. N. Wilson, Y. Cai, T. J. S. Munsie, A. Amon, *et al.*, μ SR and magnetometry study of the type-I superconductor BeAu, *Phys. Rev. B*, 2019, **99**, 134510.
- 8 R. Khasanov, R. Gupta, D. Das, A. Amon, A. Leithe-Jasper and E. Svanidze, Multiple-gap response of type-I noncentrosymmetric BeAu superconductor, *Phys. Rev. Res.*, 2020, **2**, 023142.
- 9 R. Khasanov, R. Gupta, D. Das, A. Leithe-Jasper and E. Svanidze, Single-gap *versus* two, two-gap scenario: Specific heat and thermodynamic critical field of the noncentrosymmetric superconductor BeAu, *Phys. Rev. B*, 2020, **102**, 014514.
- 10 M. Smidman, M. B. Salamon, H. Q. Yuan and D. F. Agterberg, Superconductivity and spin-orbit coupling in non-centrosymmetric materials: a review, *Rep. Prog. Phys.*, 2017, **80**, 036501.
- 11 A. Amon, E. Svanidze, R. Cardoso-Gil, M. N. Wilson, H. Rosner, M. Bobnar, *et al.*, Noncentrosymmetric superconductor BeAu, *Phys. Rev. B*, 2018, **97**, 014501.
- 12 J. Islam, M. A. Rahman and A. A. Hossain, Physical and Superconducting Properties of Chiral Noncentrosymmetric TaRh₂B₂ and NbRh₂B₂: A Comprehensive DFT Study, *ACS Appl. Electron. Mater.*, 2022, **4**, 1143–1152.
- 13 M. Asrafusjaman, J. Islam, M. A. Rahman and A. K. M. Hossain, Investigation of the Influence of Pressure on the Physical Properties and Superconducting Transition Temperature of Chiral Noncentrosymmetric TaRh₂B₂ and NbRh₂B₂, *ACS Omega*, 2023, **8**, 21813–21822.
- 14 C. Stampfl and C. G. Van de Walle, Density-functional calculations for III-V nitrides using the local-density approximation and the generalized gradient approximation, *Phys. Rev. B*, 1999, **59**, 5521.
- 15 Z. J. Wu, E. J. Zhao, H. P. Xiang, X. F. Hao, X. J. Liu and J. Meng, Crystal structures and elastic properties of superhard IrN₂ and IrN₃ from first principles, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 2007, **76**, 054115.
- 16 S. Mehta, G. D. Price and D. Alfè, Ab initio thermodynamics and phase diagram of solid magnesium: a comparison of the LDA and GGA, *J. Chem. Phys.*, 2006, **125**(19), 194507.
- 17 P. Hohenberg and W. Kohn, Inhomogeneous electron gas, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 1964, **136**, B864–B871.
- 18 W. Kohn and L. J. Sham, Self-consistent equations including exchange and correlation effects, *Phys. Rev. A: At., Mol., Opt. Phys.*, 1965, **140**, A1133–A1138.
- 19 S. J. Clark, M. D. Segall, C. J. Pickard, P. J. Hasnip, M. I. J. Probert, K. Refson and M. C. Payne, First principles methods using CASTEP, *Z. für Kristallogr. – Cryst. Mater.*, 2005, **220**, 567–570.
- 20 D. M. Ceperley and B. J. Alder, Ground State of the Electron Gas by a Stochastic Method, *Phys. Rev. Lett.*, 1980, **45**, 566–569.
- 21 J. P. Perdew and A. Zunger, Self-interaction correction to density-functional approximations for many-electron systems, 1981 for many-electron systems, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 1981, **23**, 5048–5079.
- 22 J. P. Perdew, K. Burke and M. Ernzerhof, Generalized Gradient Approximation Made Simple, *Phys. Rev. Lett.*, 1996, **77**, 3865–3868.
- 23 D. Vanderbilt, Soft self-consistent pseudopotentials in a generalized eigenvalue formalism, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 1990, **41**, 7892–7895.
- 24 H. J. Monkhorst and J. D. Pack, Special points for Brillouin-zone integrations, *Phys. Rev. B: Solid State*, 1976, **13**, 5188–5192.
- 25 T. H. Fischer and J. Almlof, General methods for geometry and wave function optimization, *J. Phys. Chem.*, 1992, **96**, 9768–9774.
- 26 F. D. Murnaghan, Finite deformations of an elastic solid, *Am. J. Math.*, 1937, **59**, 235–260.
- 27 J. Islam, S. K. Mitro, M. M. Hossain, M. M. Uddin, N. Jahan, A. K. M. A. Islam, S. H. Naqib and M. A. Ali, Exploration of the physical properties of the newly synthesized Kagome superconductor LaIr₃Ga₂ using different exchange–correlation functionals, *Phys. Chem. Chem. Phys.*, 2022, **24**, 29640–29654.
- 28 P. Vajeeston and H. Fjellvåg, First-principles study of structural stability, dynamical and mechanical properties of Li₂FeSiO₄ polymorphs, *RSC Adv.*, 2017, **7**, 16843–16853.
- 29 M. A. Ali, M. A. Hossain, M. A. Rayhan, M. M. Hossain, M. M. Uddin, M. Roknuzzaman, K. Ostrikov, A. K. M. A. Islam and S. H. Naqib, First-principles study of elastic, electronic, optical and thermoelectric properties of newly synthesized K₂Cu₂GeS₄ chalcogenide, *J. Alloys Compd.*, 2019, **781**, 37–46.



- 30 D. G. Pettifor, Theoretical predictions of structure and related properties of intermetallics, *Mater. Sci. Technol.*, 1992, **8**, 345–349.
- 31 S. F. Pugh, XCII. Relations between the elastic moduli and the plastic properties of polycrystalline pure metals, *Lond. Edinb. Dublin Philos. Mag. J. Sci.*, 1954, **45**, 823–843.
- 32 I. N. Frantsevich, F. F. Voronov and S. A. Bakuta, *Handbook on Elastic Constants and Moduli of Elasticity for Metals and Nonmetals*, Naukova Dumka, Kiev, 1982.
- 33 X. Q. Chen, H. Niu, D. Li and Y. Li, Modeling hardness of polycrystalline materials and bulk metallic glasses, *Intermetallics*, 2011, **19**, 1275–1281.
- 34 Z. Sun, D. Music, R. Ahuja and J. M. Schneider, Theoretical investigation of the bonding and elastic properties of nanolayered ternary nitrides, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 2005, **71**, 193402.
- 35 S. I. Ranganathan and M. Ostoja-Starzewski, Universal elastic anisotropy index, *Phys. Rev. Lett.*, 2008, **101**, 055504.
- 36 O. L. Anderson, A simplified method for calculating the Debye temperature from elastic constants, *J. Phys. Chem. Solid.*, 1963, **24**, 909–917.
- 37 M. M. Hossain, M. A. Ali, M. M. Uddin, A. K. M. A. Islam and S. H. Naqib, Origin of high hardness and optoelectronic and thermo-physical properties of boron-rich compounds B₆X (X = S, Se): a comprehensive study *via* DFT approach, *J. Appl. Phys.*, 2021, **129**(17), 175109.
- 38 M. E. Fine, L. D. Brown and H. L. Marcus, Elastic constants *versus* melting temperature in metals, *Scr. Metall.*, 1984, **18**, 951–956.
- 39 J. Vallin, M. Mongy, K. Salama and O. Beckman, Elastic constants of aluminum, *J. Appl. Phys.*, 1964, **35**, 1825–1826.
- 40 R. Swetarekha, V. Kanchana, G. Vaitheeswaran, A. Svane, S. B. Dugdale and N. E Christensen, Electronic topological transition in LaSn₃ under pressure, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 2012, **85**, 174531.
- 41 M. I. Kholil, M. S. Ali and M. Aftabuzzaman, Structural, elastic, electronic and vibrational properties of BaRh₂P₂ and SrIr₂As₂ superconductors: a DFT study, *J. Alloys Compd.*, 2018, **740**, 754–765.
- 42 W. L. McMillan, Transition temperature of strong-coupled superconductors, *Phys. Rev.*, 1968, **167**, 331–344.
- 43 J. Islam and A. K. M. A. Hossain, Semiconducting to metallic transition with outstanding optoelectronic properties of CsSnCl₃ perovskite under pressure, *Sci. Rep.*, 2020, **10**, 14391.

