

# Green Chemistry

Accepted Manuscript



This is an *Accepted Manuscript*, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.


*Accepted Manuscripts* are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this *Accepted Manuscript* with the edited and formatted *Advance Article* as soon as it is available.

You can find more information about *Accepted Manuscripts* in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this *Accepted Manuscript* or any consequences arising from the use of any information it contains.



[www.rsc.org/greenchem](http://www.rsc.org/greenchem)

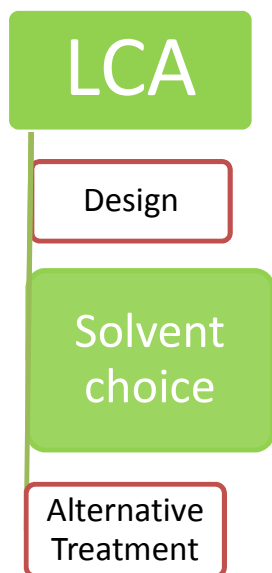

This work allows for gathering of information during the process design for the choice of the solvent and technology to use.

# Guidelines based on life cycle assessment for solvent selection during the process design and evaluation of treatment alternatives

Antonio Amelio<sup>1\*</sup>, Giuseppe Genduso<sup>1</sup>, Steven Vreysen<sup>2</sup>, Patricia Luis<sup>3</sup>, Bart Van der Bruggen<sup>1</sup>

<sup>1</sup>Department of Chemical Engineering, Process Engineering for Sustainable Systems (ProcESS),  
KU Leuven, W. de Croylaan 46, 3001 Leuven, Belgium

\*Tel: +32 16 322341; Fax: +32 16 322991; Email: antonio.amelio@cit.kuleuven.be

<sup>2</sup>Thomas More, Kleinhoefstraat 4, 2440 Geel, Belgium

<sup>3</sup>Materials & Process Engineering (iMMC-IMAP), Université catholique de Louvain,  
Place Saint Barbe 2, 1348 Louvain-la-Neuve, Belgium

## ABSTRACT

The scope of this paper is to develop a guideline that helps, during the decision making of the treatment options of waste solvents and more importantly for the choice of solvent in the design of the process a priori, from an environmental point of view based on the composition of a mixture. Life cycle assessment (LCA) was used to evaluate two treatment alternatives: continuous distillation and incineration. The software Ecosolvent® v.1.0.1 was used to perform the LCA, considering two scenarios (the best and worst scenarios) and five environmental

indicators: Eco-indicator 99, UBP-97, global warming potential, cumulative energy demand and CO<sub>2</sub>-balance.

From the results, it can be concluded that the environmental impact originated from the production of the solvents is the main issue to consider for the selection of distillation or incineration as the treatment method during the process design. In general, those solvents with a low impact during their production stage were found to be candidates for incineration. Instead, those compounds that yield a great environmental burden during the production step should be always recovered in order to minimize the total impact. A series of charts is presented as guidelines to select the most environmentally favorable alternative for mixtures of solvents and to select which solvent to use considering the environmental effects that are produced. Regarding the information given by the different indicators, it was observed that all the studied indicators lead to the same conclusions for the evaluated mixtures with some exceptions for UBP-97.

**Keywords:** continuous distillation; incineration; life cycle assessment; Ecosolvent; solvent recovery;

## 1 INTRODUCTION

A wide range of organic solvents is used in the pharmaceutical and chemical industries<sup>1</sup>. These solvents are used in large amounts for a variety of products (paints, coatings, adhesives), as raw material for product syntheses, as reaction media, and for equipment cleaning. Since many solvents are highly volatile, considerably persistent, and highly toxic, the handling of solvents in the chemical industry represents a high priority environmental issue<sup>2</sup>. After their use in chemical production processes, solvents often cannot be reused in the original process due to residual

contaminations, quality requirements and/or legal restrictions<sup>3</sup>. Such solvents become waste solvents.

Waste solvent management should aim at minimizing hazardous waste, reducing raw material input and lowering the emission of toxic substances; therefore, it should be considered part of an environmentally friendly chemical product and in process design. Currently, two different waste solvent treatment options are generally applied: thermal treatment in hazardous waste solvent incinerators and solvent recovery. The most important technology for solvent recovery is distillation (rectification). Because pending legislation could dramatically increase the cost of spent solvent incineration, manufacturers may determine that recovering these solvents may have the best impact on the company's bottom line. As time progresses, solvent recovery will likely become a "must-invest" decision for the majority of pharmaceutical manufacturers<sup>4</sup>. From an environmental perspective it is not known to date whether waste-solvent incineration (with heat regeneration) or recovery is the preferable treatment option. Both treatment options enable a reduction of the demand of non-renewable resources. Solvent incineration substitutes fuel for steam and electricity, obtained after conversion of the energy produced during the incineration. The recovery of waste solvents avoids petrochemical solvent production<sup>3</sup>. At a first glance, it could be said that distillation is more environmentally friendly than incineration due to the 'solvent recovery' involved in this technology. Some authors<sup>5</sup> showed for three pharmaceutical cases that solvent recovery in the pharmaceutical industry has a significant effect on the environmental impact of API manufacture. However, incineration can take advantage over distillation. For example, in a previous work<sup>6</sup>, it was identified some cases of solvents with lower overall impact when incineration is used. This was related to a negligible impact reduction by distillation due to solvent recovery, thus the production of energy by incineration shows a clear advantage compared with distillation. If the solvent production entails a large environmental

burden, the environmental credits obtained by solvent recovery are higher than those obtained by the energy production from incineration. In addition, the presence of azeotropic mixtures (*i.e.*, mixtures that cannot be separated by conventional distillation) can also condition the applicability of distillation due to the high energy requirements. Other recovery technologies should be also evaluated<sup>7, 8</sup>, showing the best engineering alternatives to waste incineration, although this is not the main objective in the present work. Thus only distillation will be considered as the recovery technology.

A suitable method for a comprehensive quantification of the environmental impact of these technologies is life-cycle assessment (LCA) method<sup>9</sup>, which is a systematic method for analyzing the environmental aspects of a product, process or service through a cradle-to-grave approach<sup>5</sup>. In this approach, a product is examined from *when* and *how* its raw materials were acquired, to its production, use, and finally destruction<sup>10</sup>. Thus, it allows a comprehensive understanding of the overall environmental effects of a process, allowing the analyst to recognize problems and solutions that a single-issue approach does not readily identify<sup>5</sup>.

For developing an LCA, the following steps should be considered: goal definition and scope; life cycle inventory analysis (LCI); life cycle impact assessment and life cycle interpretation. The development of an LCA is time intensive and not linear. Throughout the process, it is necessary to return to previous steps and interpret the results and the relation of these results to other steps in the LCA process. One possibility for overcoming such limitations is the application of life-cycle inventory (LCI) models, which help to calculate waste-solvent specific inventory flows (such as emission flows and ancillary uses) as a function of few input parameters (such as waste-solvent composition and treatment technology)<sup>11</sup>. Such LCI models<sup>12-15</sup> are integrated in a software tool that enables the identification of environmentally preferable waste-solvent treatment options in the industry. This tool<sup>1, 11</sup>, denoted as Ecosolvent, combines LCI models for

distillation and thermal treatment. With this tool, a full LCA of various waste solvent treatment options can be performed for specific, user-defined waste-solvent compositions, in order to identify the environmentally preferable waste-solvent treatment options in the industry<sup>11</sup>.

Capello *et al.*<sup>16</sup> determined how green a solvent is using two different methods: the EHS assessment method, which is a screening method that aims to identify potential hazards of chemicals, and the life-cycle assessment (LCA) method. They proposed a comprehensive framework for the environmental assessment of solvents that covers major aspects of the environmental performance of solvents in chemical production, as well as important health and safety issues<sup>16</sup>. Their study focuses on 26 pure organic solvents that are commonly used in the chemical industry, considering EHS scorepoints and CED/kg solvent [MJ-Eq]. This same framework can also be used for a comprehensive assessment of new solvents technologies (e.g., ionic liquids, supercritical fluids).

The aim of this work is to perform an in-depth analysis to develop guidelines that a priori allow the choice of solvent to use and select the best treatment method (incineration or distillation), as a function of the composition of the chemical solvent, during the decision making that takes place in the early stages of process design. The software Ecosolvent® v.1.0.1 was used to assess the impact during solvent production for selected pure solvents allowing the choice of the solvent during a making decision phase and to establish the reference guidelines to select the most appropriate technology for binary mixtures of different solvents, using different impact indicators to have a clear assessment based on all environmental aspects (from CO<sub>2</sub> emissions to more complete and complex environmental evaluations).

## 2 MATERIALS AND METHODS

## 2.1 Methodology

The 45 different organic solvents present in Ecosolvent® v.1.0.1. have been the object of the present study. First, the impact caused during solvent production was calculated for 1 kg of every organic solvent<sup>17</sup>. The data were collected for each indicator and divided in levels of impact according to the main value of the Eco-indicator-99 (ECO-I 99). In each level, there are solvents within the same range of the ECO-I 99's mean value for the solvent production. From each level, two or three solvents were selected as reference of that level and analyzed when present in binary mixtures. Thus, the treatment by means of two distillation steps is compared with the impact caused with incineration and an evaluation of which solvent in the mixture should be recovered or incinerated can be performed. The data collected by means of this methodology were then structured in a chart for each environmental indicator. The charts will allow a fast comparison of which kind of treatment technology is better to select depending on the composition of the mixture; but also on the selection during the design process phase of one solvent, considering the impact lower or higher that it can create than another possible solvent. In addition, these results can be extrapolated to solvents that are in the same level of impact during the production step and solvents that are not available in the Ecosolvent software but whose value of impact during the solvent production is known. With these charts the user will have a fast tool to know if the solvent of interest should be incinerated or recovered for a preliminary analysis.

Finally, examples of some binary mixtures are considered to show the methodology used in this work. The basis of calculus is 1 kg of the mixture with a concentration of 50 wt% of each compound. The studies are performed considering two scenarios (best and worst scenarios), and establishing a target recovery with a purity of 99 % of one of the components in the mixture. The resulting waste stream is then incinerated with energy recovery. Batch distillation is not reported since batch and continuous distillation showed no statistical difference in a previous work<sup>6</sup>.



## 2.2 Ecosolvent

Ecosolvent® v.1.0.1 (Safety and Environmental Group, Zurich, Switzerland) was developed<sup>1, 11</sup> as a generic life cycle inventory tool that combines life cycle inventory models of distillation and thermal treatment in hazardous waste incinerators and cement kilns. In addition, a wastewater treatment model for the disposal of aqueous distillation residues is also included. The tool is publicly available at no cost ([www.sust-chem.ethz.ch/tools/ecosolvent](http://www.sust-chem.ethz.ch/tools/ecosolvent)).

### 2.2.1. Incineration model

The solvent incineration model used in this work considers a large solvent incineration plant, where liquid wastes, including spent organic solvents, distillation residues, mother liquors, waste oils, and highly organic charged wastewaters are disposed<sup>11</sup> and steam and electricity are co-products obtained in this incineration plant. The total environmental impact is the summation of the impacts (positive values) caused by the use of supplemental fuel oil ( $I_{oil}$ ), ancillaries ( $I_{anc}$ ), the emission of  $CO_2$  ( $I_{CO_2}$ ), other emissions ( $I_{em}$ ) and the reduction of environmental burdens (negative values) from the energy by-products ( $I_{energy}$ ):

$$I_{inc} = I_{oil} + I_{anc} + I_{CO_2} + I_{em} + I_{energy} \quad (1)$$

### 2.2.2. Distillation model

The solvent distillation model<sup>11</sup> can consider nine multipurpose batch distillation processes, eight distillation columns on an industrial scale and two simple batch distillation columns for preliminary purification. The total environmental impact is calculated as the sum of the impacts (positive values) produced by pre-distillation treatment steps ( $I_{pre}$ ), the use of steam ( $I_{st}$ ), electricity ( $I_{el}$ ), nitrogen ( $I_{n_2}$ ), ancillaries ( $I_{anc}$ ), outlet air ( $I_{air}$ ) and residue ( $I_{res}$ ), treatment of

wastewater ( $I_{ww}$ ) and the reduction of environmental burdens (negative values) due to solvent recovery ( $I_{solv}$ ):

$$I_{dist} = I_{pre} + I_{st} + I_{el} + I_{n2} + I_{anc} + I_{air} + I_{res} + I_{ww} + I_{solv} \quad (2)$$

A detailed description of the mathematical approach can be found in Capello et al. (2008).

### 2.2.3. Environmental Indicators

Ecosolvent includes different methods for the impact assessment<sup>11</sup>, such the Eco-indicator 99<sup>18</sup>, cumulative energy demand<sup>19</sup>, method of ecological scarcity—also called eco-scarcity or eco-points method (from the German name of the unit used “Umweltbelastungspunkte”, UBP’97)<sup>20</sup>, global warming potential<sup>21</sup> and CO<sub>2</sub> balances. It is important to mention that the ReCiPe impact assessment method has been recently<sup>22</sup>, which is an improvement on Eco-indicator 99. In Ecosolvent, ReCiPe is not available; however, it is a useful tool to perform an LCA since it allows comparison between incineration and distillation, typical treatment methods in the chemical industry.

In this work, all those environmental indicators were considered in order to have a clear view of the imitations of the technology under different perspectives. A detailed description of each indicator can be found in work cited above<sup>19, 20, 21, 22</sup>. As summary, a brief definition is included below:

- The Eco-indicator 99 is a lifecycle assessment methodology, which is specifically developed for product design<sup>3, 19</sup>). The method contains a damage model (fate-, exposure-, effect-, and damage analysis), normalization and weighing step, which makes it possible to express the environmental impact with a single score, the ecoindicator point. The potential damage is focused on three categories: damage to human health, to ecosystem quality and to resources<sup>19</sup>. The scale of Eco-indicators is chosen in such a way that the

value of 1 pt is representative for one thousandth of the yearly environmental load of one average European inhabitant<sup>19,23</sup>.

- The cumulative energy demand (CED) calculates the primary energy demand<sup>19</sup>, which is expressed as MJ equivalents.
- The method of ecological scarcity (UBP'97) takes into account a comparative weighing and aggregation of various environmental interventions by use of so-called eco-factors, which are calculated from the present pollution level (current flows) and on the pollution considered as critical (critical flows). The score is expressed as UBP.
- The global warming potential is calculated according to IPCC guidelines<sup>21</sup>, and it is expressed as CO<sub>2</sub> equivalents.
- The total CO<sub>2</sub> indicates the total CO<sub>2</sub> emissions of a complete CO<sub>2</sub> balance.

### 2.3 Case scenarios

The two case scenarios described in Table 1 have been considered, named as best and worst case scenarios<sup>6</sup>. Continuous distillation and incineration have been applied and compared for the material or energy recovery of the waste solvent for each case scenario. It has been also considered for distillation that the residue after the second step is incinerated.

Table 1: Case scenarios considered in this work

<b>Best scenario</b>		<b>Worst scenario</b>	
Distillation	Incineration	Distillation	Incineration

Ancillaries	-	-	-	-
Steam	From waste-solvent incineration	-	Average European production	-
Avoided steam production	-	Average European production <sup>a</sup> (100 % efficiency)	-	From natural gas <sup>b</sup> (90 % efficiency)
Electricity	CH	-	UCTE	-
Air treatment	Air incineration	-	VOCs	-
Residue 1	Distillation step 2	-	Distillation step 2	-
Residue 2	Incineration	-	Incineration	-

---

Recovery of solvents is 99 % for all the mixtures

<sup>a</sup>Steam (average production) from average European steam production using 76 % natural gas and 24 % heavy fuel oil

<sup>b</sup>Steam (from natural gas) using 100 % natural gas

The best-case scenario tries to minimize the environmental burdens (and maximize the environmental credits), and the worst-case scenario assumes maximal environmental burdens (and minimal environmental credits)<sup>1</sup>. The best scenario for distillation considers to use the Swiss electricity mix (CH) as the source of electricity, and the worst scenario considers the average European electricity mix (UCTE) for electricity production<sup>6</sup>.

The residue from the first distillation step (residue 1) is sent to the second distillation step, and the residue produced in this second step (residue 2) is treated in a special waste solvent incinerator, in both scenarios. In the steam production for the distillation, the best scenario considers the steam from waste solvent incineration since it avoids the production and the following consumption of fossil fuels and produces a lower environmental burden; instead, the





average European production in thermal power plant considers mixtures of natural gas and other fuels, and its use can be assumed to be the worst scenario<sup>1</sup>. The emissions of outlet air were of minor importance, except for in the worst-case scenario of outlet air assessed with UBP'97. In this scenario, it was assumed that the outlet air, containing non-methane volatile organic carbon (NMVOC), was directly emitted to the atmosphere<sup>1</sup>. When incineration is applied, steam can be produced, and this production can be considered as a reduction of steam from other sources. In the best case, the production of steam from the worst source and maximum efficiency is avoided whereas in the worst case, considers the production of steam using the most impactful source with the least efficiency. A detailed explanation of the case scenarios can be found elsewhere<sup>1, 6, 11</sup>.






#### 2.4 Uncertainty of results

In order to determine the uncertainty of results, the Ecosolvent tool makes calculations by taking the parameter uncertainty of input and model parameters into account using stochastic modeling (Monte Carlo analysis) to quantify the uncertainty<sup>17</sup>. Therefore, the results are presented with uncertainty and not as exact values. Note that only uncertainty arising from the life cycle inventory analysis is quantified, whereas uncertainty of impact assessment factors cannot be considered. The span between the minimum and maximum value represents the 95 % interval. Figure S1 in the supplementary information is included to help with the interpretation of the results. Results larger than 0 represent environmental burdens (e.g., due to the use of steam in the distillation process), and results below 0 denote environmental credits due to the avoidance of virgin solvent production (credits for solvent recovery) or fossil fuels (credits for the energy use of the waste solvent).

In this work, the impact originating from solvent production will be calculated for the 45 evaluated solvents and the selection of the most appropriate treatment method (distillation or incineration) of binary solvent mixtures from an environmental point of view will be determined. The obtained results are discussed according to the statistical criteria (colors for the charts) indicated in Table 2.

Table 2: Criteria followed for the elaboration of the charts (guidelines for selection of the treatment method: distillation or incineration)

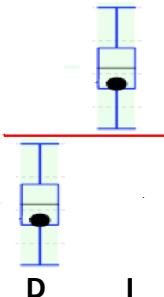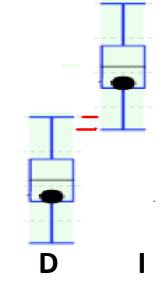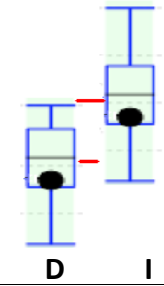Concept	Statistical description	Drawing
<b>Dark green + letter D</b>	The interval of confidence of distillation (D) is lower than that of incineration (I).	
<b>Dark green</b>	The mean value (50th percentile) present a slight deviation and the indicator for distillation is smaller than the overall range of the incineration with a confidence interval that can be partially overlapped.	
<b>Light green with *</b>	The mean value of the indicator for distillation is higher than the minimum value of incineration but below the interval between 25%-75% and at the same time, the maximum value of distillation is lower than mean value of incineration	
<b>Light green without *</b>	The mean value of the indicator for distillation is higher than the minimum value of incineration but below the interval between 25%-75% and at the same time the maximum value of distillation is higher than the mean value of incineration	
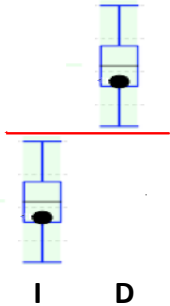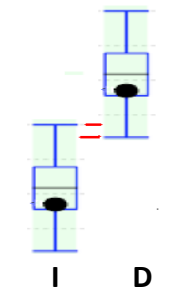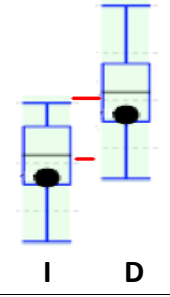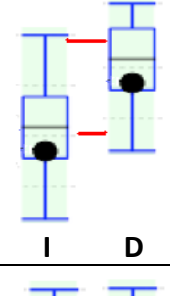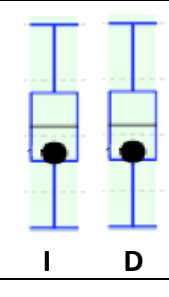
<b>Dark yellow + letter I</b>	Incineration is clearly better than distillation from a statistical point of view.	 <p>Box plot comparing incineration (I) and distillation (D). The y-axis represents an indicator value. The distillation box (D) is positioned higher than the incineration box (I). A red horizontal line is drawn above the distillation box, indicating a higher mean value for distillation.</p>
<b>Dark yellow</b>	The mean value of the indicator for incineration is lower than the overall range of the distillation but the confidence interval can be partially overlapped.	 <p>Box plot comparing incineration (I) and distillation (D). The distillation box (D) is higher than the incineration box (I). A red horizontal line is drawn below the distillation box, indicating a lower mean value for distillation.</p>
<b>Light yellow with *</b>	The mean value of the indicator for incineration is higher than the minimum value of distillation but below the interval between 25%-75% <b>and</b> at the same time, the maximum value of incineration is lower than the mean value of distillation	 <p>Box plot comparing incineration (I) and distillation (D). The distillation box (D) is higher than the incineration box (I). A red horizontal line is drawn above the incineration box, indicating a higher mean value for incineration.</p>
<b>Light yellow without *</b>	The mean value of the indicator for incineration is higher than the minimum value of distillation but below the interval between 25%-75% <b>and</b> at the same time, the maximum value of incineration is lower than mean value of distillation.	 <p>Box plot comparing incineration (I) and distillation (D). The distillation box (D) is higher than the incineration box (I). A red horizontal line is drawn below the incineration box, indicating a lower mean value for incineration.</p>
<b>Colorless</b>	There is no statistical difference between distillation and incineration	 <p>Box plot comparing incineration (I) and distillation (D). The two boxes are positioned at similar levels and have overlapping ranges, indicating no significant statistical difference.</p>

### 3 RESULTS


#### 3.1 Levels of impact according to the solvent production

The impact caused during the solvent production has been calculated for all the environmental indicators and available solvents in Ecosolvent® v.1.0.1 for 1 kg of waste solvent. The detailed results are shown in Tables S-1 in the Supporting Information, which have been ordered according to the mean value of the Ecoindicator-99.

The results are reported as single scores, directly calculated. The explanations can be found the supplementary material<sup>11</sup>. They show how the environmental impact of each inventory parameter was calculated in the two case studies, including the statistical data ranges of distillation parameters and consumption and impact factors.

Figure 1 shows the values of the impact (Ecoindicator-99) of each solvent caused during the production step and grouped according to their chemical structure (alcohols, ketones, aldehydes, etc) in order to have a more clear view in the comparison. Results for the other environmental indicators (UBP'97, GWP, CED, CO<sub>2</sub>) are shown in Figures 2-5. Also, the values for a generic organic solvent, useful to approximate other solvents out Ecosolvent, have been included as reference (red column in Figure 1 and Figures 2-5)<sup>17</sup>.

a)

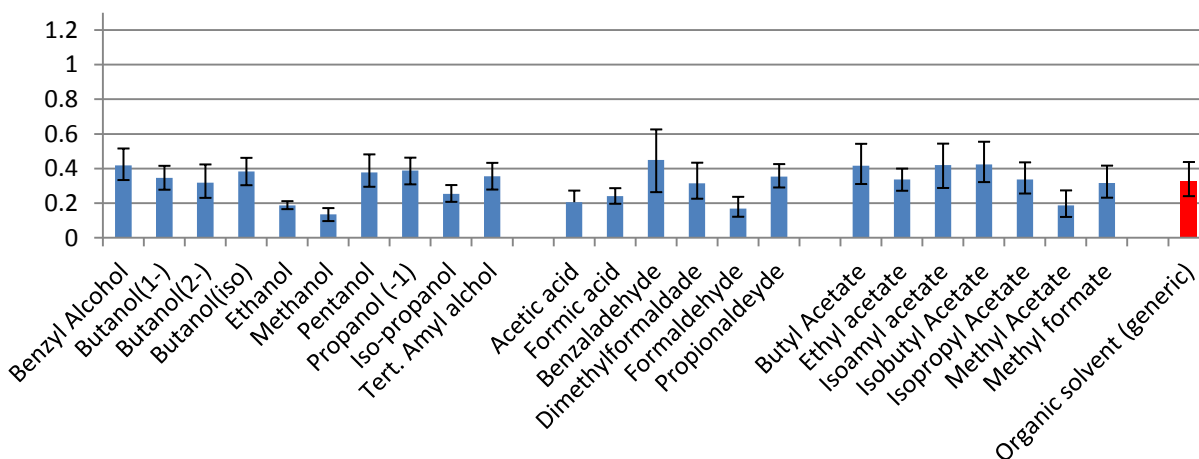



b)


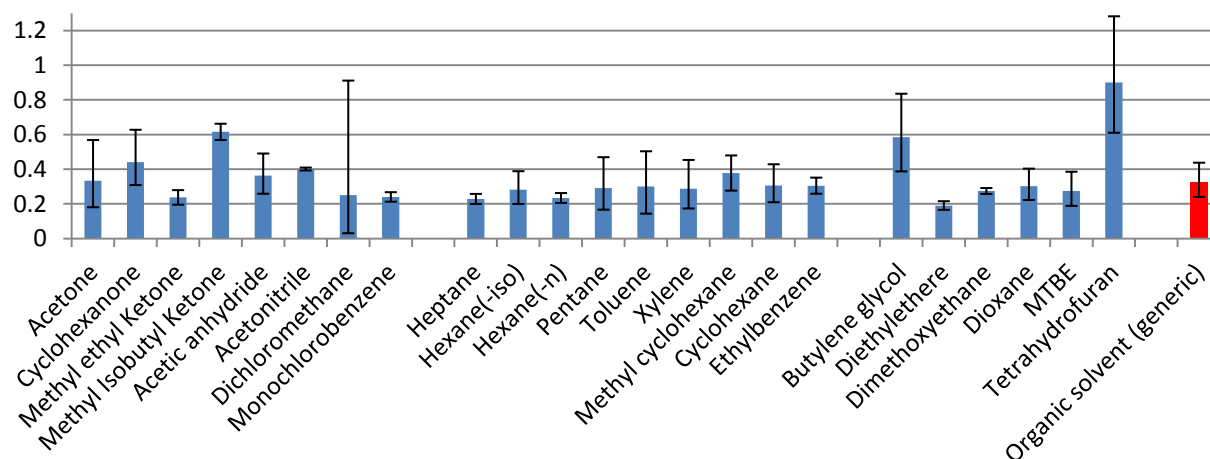


Figure 1: ECO-I 99 caused during solvent production for: a) alcohols, acid & aldehydes, and esters; b) ketones & others, hydrocarbons with more than 5 carbon atoms, oxygenates;

a)

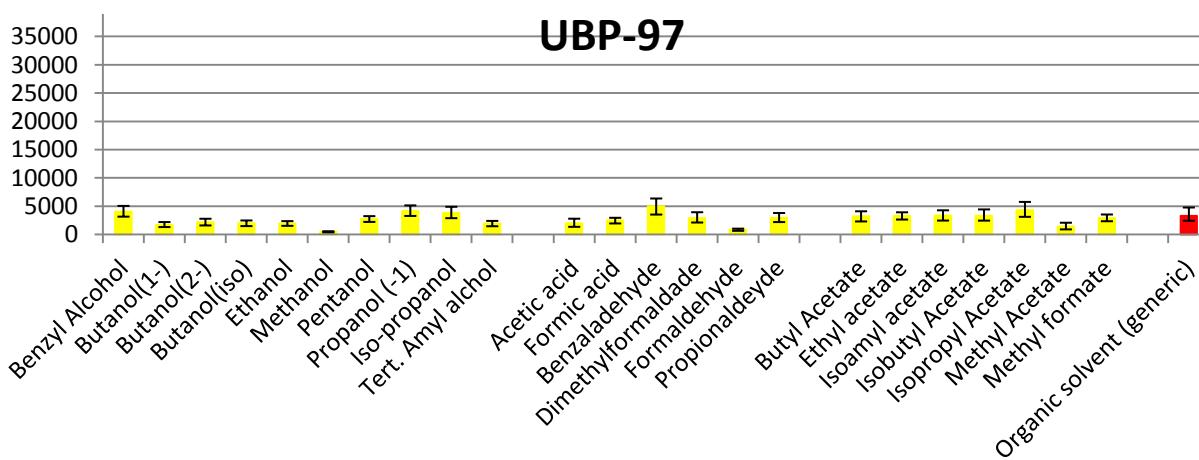

b)


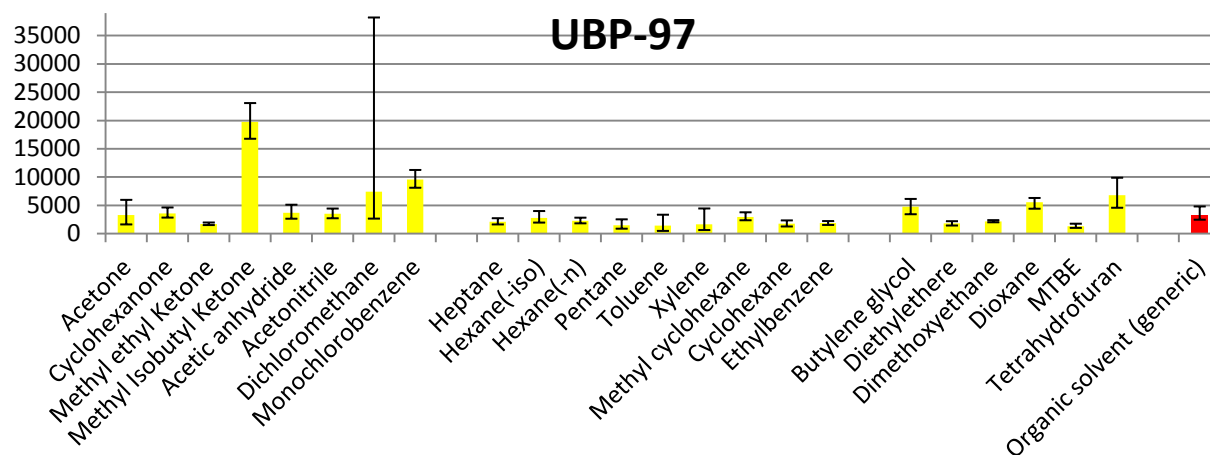


Figure 2: UBP-97 caused during solvent production for: a) alcohols, acid & aldehydes, and esters; b) ketones & others, hydrocarbons with more than 5 carbon atoms, oxygenates;

a)

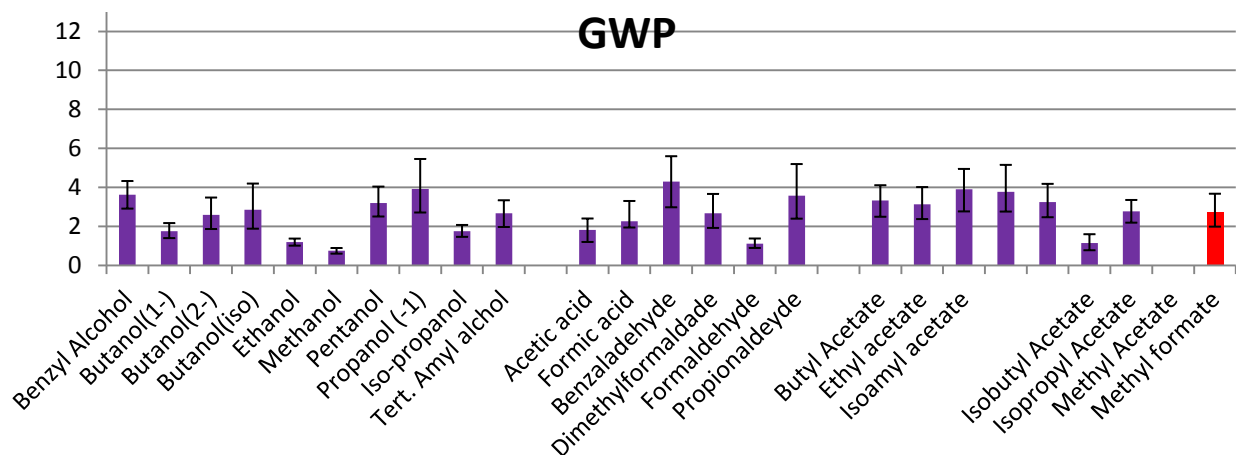

b)


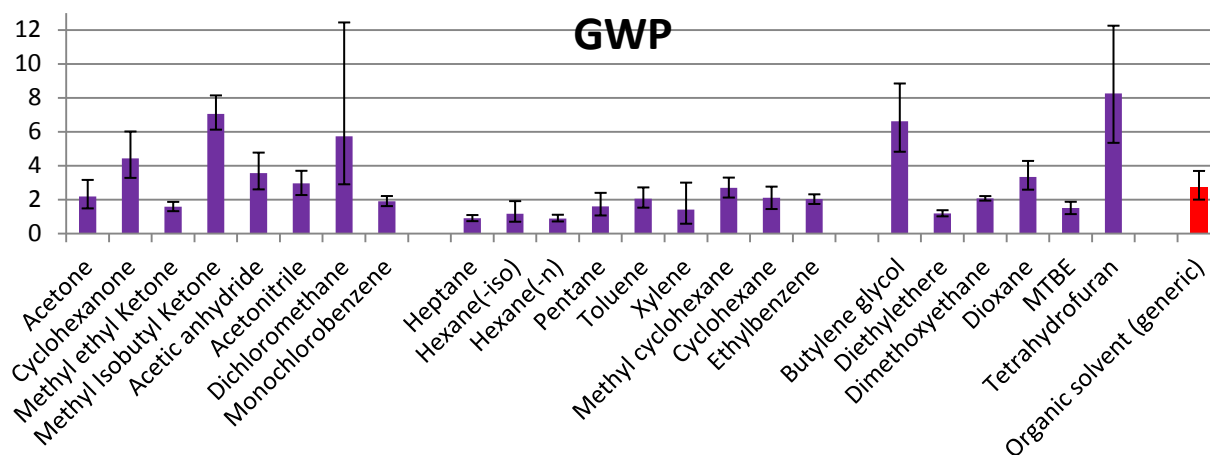


Figure 3: GWP caused during solvent production for: a) alcohols, acid & aldehydes, and esters;

b) ketones & others, hydrocarbons with more than 5 carbon atoms, oxygenates;

a)

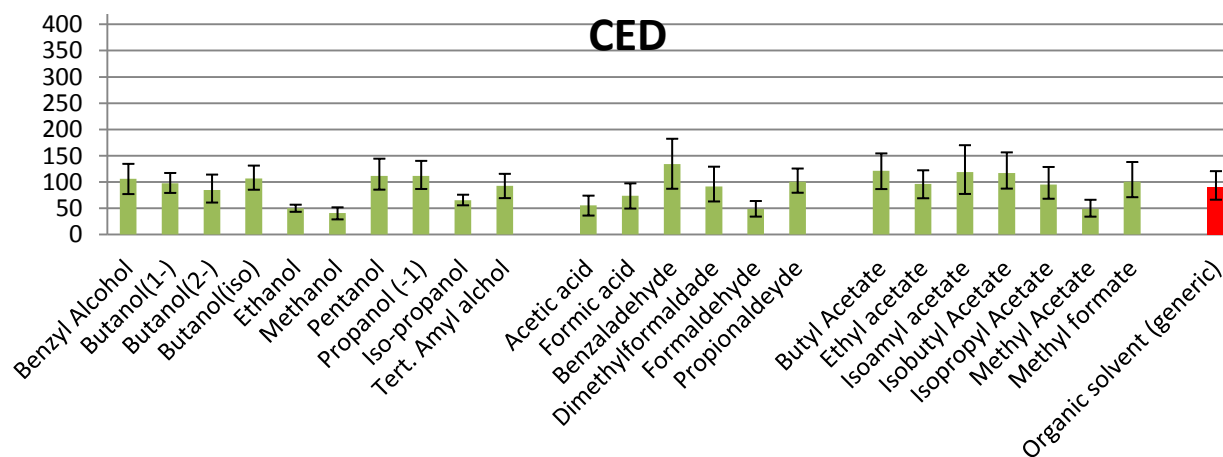

b)


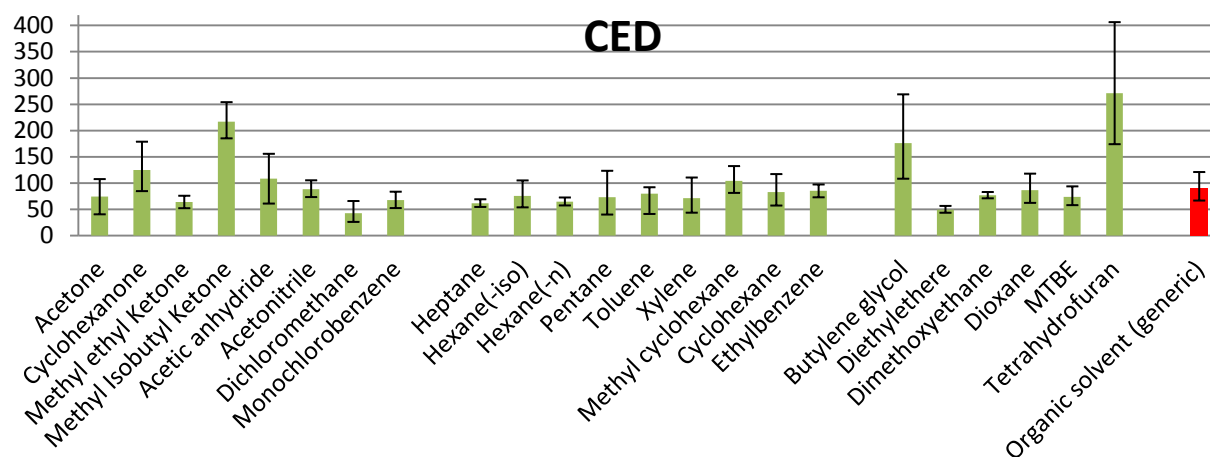


Figure 4: CED caused during solvent production for: a) alcohols, acid & aldehydes, and esters; b) ketones & others, hydrocarbons with more than 5 carbon atoms, oxygenates;

a)

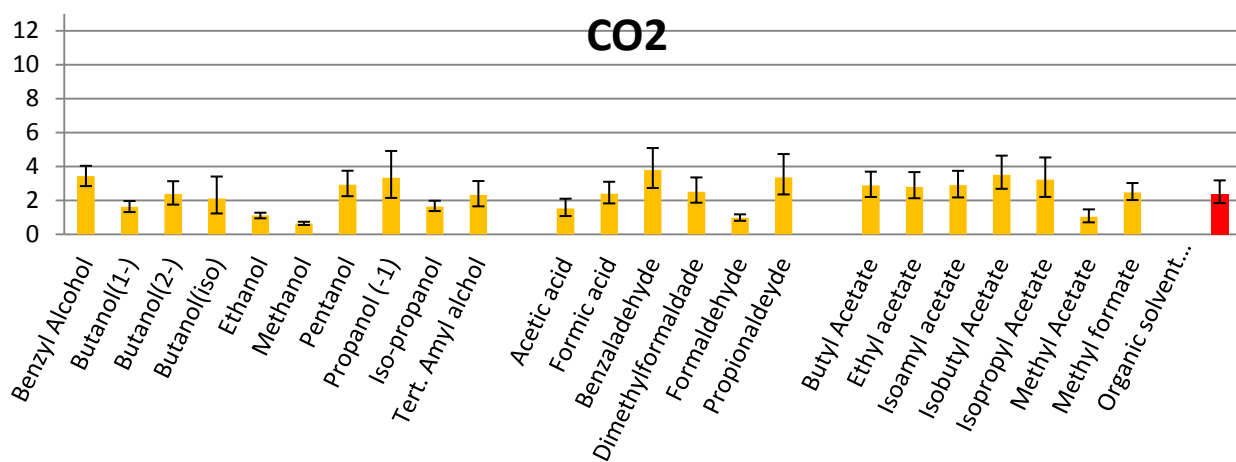

b)

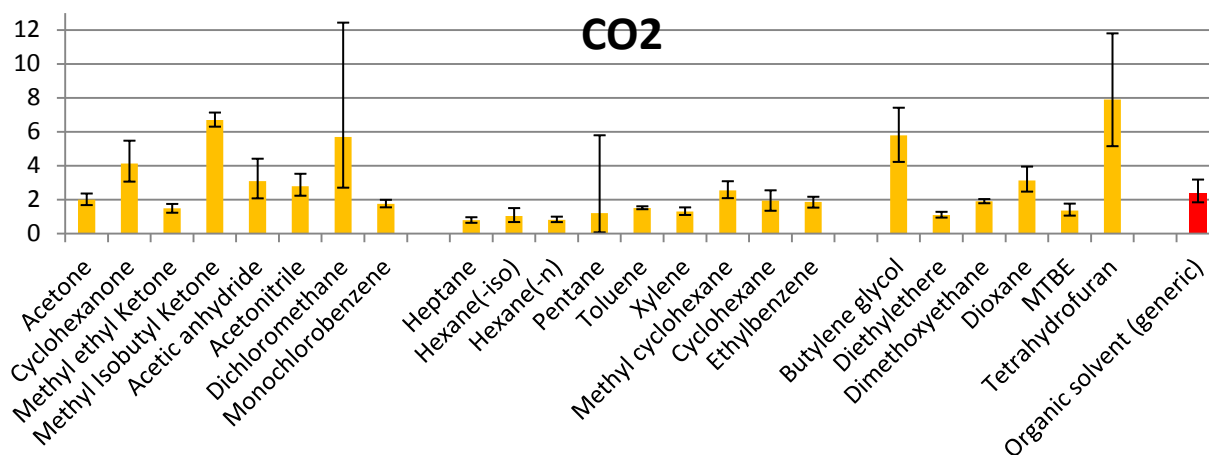


Figure 5: CO<sub>2</sub> caused during solvent production for: a) alcohols, acid & aldehydes, and esters; b) ketones & others, hydrocarbons with more than 5 carbon atoms, oxygenates;

In the families composed of alcohols, acids-aldehydes and esters (Fig. 1a), the confidence interval of solvent production for almost all the solvents is partially or totally overlapped with that for the organic generic solvent. Methanol, ethanol, acetic acid, formic acid, methyl acetate and formaldehyde show a lower impact, while benzaldehyde has a higher impact than the average. In Figure 1b, a significant difference of the values between THF, butylene glycol, MIK with the organic generic solvent can be observed. Dichloromethane shows the largest uncertainty; diethyl ether has a value lower than the average. For the rest of solvents, an impact within the interval of confidence of the generic organic solvent can be observed. The maximum value found for this environmental indicator is in the production of tetrahydrofuran (THF), while the minimum value is when methanol is produced, according to the values of Ecoindicator-99 (see Table S1 in Supporting Information and Figure 1). The impacts shown in Figure 1 for Ecoindicator-99 have the same trends with the other environmental indicators, as shown in Figures 2-5. For Ecoindicator-99, methanol has the lowest interval of confidence, also for all the

others indicators, UBP-97, GWP, CO<sub>2</sub> and CED. Regarding tetrahydrofuran, it has the highest impact, except when UBP-97 is considered. In this case, methyl isobutyl ketone shows the highest burden during the production step for this indicator. Furthermore, dichloromethane shows the largest interval of confidence, except for CED (Table S1 and Figures 2-5).

The interval of confidence for a solvent can change between two different environmental indicators. However, the solvents have been grouped in 7 families according to their level of impact considering the Ecoindicator-99, as shown in Table 3. Each level shows those solvents with the same range of impact yielded during the production phase. These families will allow the elaboration of charts that will serve as guidelines during the decision making.

Table 3: Levels of impact during the solvent production for EcoIndicator 99

<b>Eco-99</b>		
<b>Level</b>	<b>Range value</b>	<b>Compounds</b>
I	$0.135 < x$	Methanol
II	$0.135 < x < 0.19$	Formaldehyde, Methyl Acetate, Ethanol, Diethyl ethere
III	$0.19 < x < 0.219$	Acetic Acid, Heptane, n-Hexane, Methyl-ethyl-Ketone, Formic Acid, Mono-chloro-benzene, Dichloro-methane*, iso-Propanol, MTBE, Di-methoxy-ethane, iso-Hexane, Xylene, Pentane
IV	$0.219 < x < 0.347$	Toluene, Dioxane, Ethyl-Benzene, CycloHexane, Dimethyl-formaldehyde, Methyl-formate, 2-Butanol, Acetone, EthylAcetate, Isopropyl-Acetate, 1-Butanol

V	$0.347 < x < 0.388$	Propionaldehyde, Tert-Amyl Alcohol, Acetic Anhydride, Methyl Cyclohexane, Pentanol, iso-Butanol, 1-Propanol
VI	$0.388 < x < 0.424$	Acetonitrile, Butyl Acetate, Benzyl Alcohol, iso-Amyl Acetate, iso-Butyl Acetate
VII	$0.424 < x < 0.9$	Cyclohexanone, Benzaldehyde, Butylene glycol, Methyl-Ketone*, Tetrahydrofuran

\*Compounds that will be studied outside the levels.

### 3.2 Charts

For each impact level of solvents, some compounds have been selected as reference to study the best treatment technology whenever they are present in binary mixtures. They have been chosen to represent each level, considering the range of impact in the level. For some levels, more solvents have been chosen to cover the overall range considered. Table 4 shows the values of the studied indicators for the selected compounds. The three values that are shown per solvent and per indicator refer to the minimum value, the mean value and the maximum value.

Table 4: Solvent impact levels used in the elaboration of the charts.

Impact Level	Compounds	Descriptive Values	Eco-I 99	UBP-97	GWP	CED	CO2
I	Methanol	min	0.097	370	0.616	29.2	0.553
		mean	0.135	480	0.764	40.9	0.650
		max	0.172	607	0.906	52.1	0.742
II	Formaldehyde	min	0.122	678	0.91	34.4	0.801
		mean	0.169	856	1.13	49.2	0.978
		max	0.237	1065	1.39	64.1	1.18
	Ethanol	min	0.166	1559	1.03	43.6	0.945
		mean	0.188	1932	1.19	50.2	1.11
		max	0.212	2391	1.39	57.1	1.28

III	Heptane	min	0.200	1620	0.731	54.4	0.633
		mean	0.228	2125	0.901	61.5	0.788
		max	0.258	2719	1.09	69.1	0.962
	Formic acid	min	0.197	1982	1.96	49.7	1.83
		mean	0.240	2485	2.26	73.6	2.40
		max	0.287	2981	3.32	97.7	3.10
	Xylene	min	0.174	630	0.579	43.6	1.10
		mean	0.288	1635	1.42	71.5	1.31
		max	0.454	4439	3.00	110	1.54
IV	Dioxane	min	0.223	4396	2.59	62.2	2.47
		mean	0.302	5535	3.34	86.4	3.13
		max	0.404	6294	4.28	118	3.95
	Methyl formate	min	0.232	2373	2.20	71.4	2.02
		mean	0.316	2928	2.78	100	2.48
		max	0.417	3562	3.37	138	3.02
	IsopropylAcetate	min	0.256	3151	2.48	68.4	2.21
		mean	0.337	4311	3.25	95.3	3.22
		max	0.436	5786	4.19	129	4.53
V	Propionaldeyde	min	0.291	2228	2.41	79.8	2.35
		mean	0.353	2947	3.59	101	3.37
		max	0.426	3825	5.21	126	4.73
	Propanol (-1)	min	0.309	3304	2.72	87.0	2.15
		mean	0.388	4175	3.93	112	3.35
		max	0.463	5169	5.47	140	4.91
	Acetonitrile	min	0.393	2710	2.27	73.3	2.23
		mean	0.401	3534	2.96	88.6	2.80
		max	0.410	4426	3.70	105	3.52
Isobutyl Acetate	min	0.322	2483	2.77	87.7	2.68	
	mean	0.424	3317	3.78	117	3.52	
	max	0.555	4461	5.17	157	4.64	
VII	Benzaladehyde	min	0.264	3552	2.99	87.4	2.73
		mean	0.449	4989	4.30	134	3.79
		max	0.626	6391	5.61	183	5.08
	Tetrahydrofuran	min	0.611	4568	5.34	174	5.15
		mean	0.900	6833	8.26	271	7.90
		max	1.28	9871	12.2	406	11.8
	Dichloromethane	min	0.031	2649	2.90	26.0	2.70
		mean	0.251	7412	5.73	42.6	5.70
		max	0.912	3820	12.4	65.8	12.4
MIK	min	0.569	16755	6.12	185	6.30	
	mean	0.615	19725	7.06	217	6.70	
	max	0.663	23062	8.14	254	7.13	



In Table 4, dichloromethane and methyl isobutyl ketone were taken out of the individual impact levels since it was observed that they do not produce the expected response and they should be considered as outliers in this study. Nevertheless, these solvents are important to be analyzed as well, because dichloromethane showed the largest uncertainty and methyl isobutyl ketone showed the highest impact for the UBP-97. Thus, none of these solvents can be classified easily in any of the considered levels. Their analysis has been thus done separately.

The solvents in Table 4 have been analyzed with Ecosolvent® v.1.0.1, in binary mixtures with a concentration of 50 wt%. Continuous distillation versus incineration has been compared as treatment technologies.

The results are reported in Figures 6-10, following the methodology indicated in section 2.4. In these charts, every box represents the result of the treatment of a binary mixture composed by the target solvent to be recovered (in the heading of the chart) with a second solvent in the mixture (left side of the chart). These charts allow the user to establish the best treatment technology for each compound, even if it is not in the chart by only knowing the value of the impact during its production and taking into account in which impact level the solvent belongs (the same value for the solvent production). Furthermore, there are two situations to consider in every box: the best and worst scenarios.

		I		II		III		IV		V		VI		VII				
		Methanol	Formaldehyde	Ethanol	Heptane	Formic acid	Xylene	Dioxane	Methyl formate	Isopropyl Acetate	Propionaldehyde	Propanol (-1)	Acetonitrile	Isobutyl Acetate	Benzaldehyde	Tetrahydrofuran	Dichloromethane	Methyl Isobutyl Ketone
I	Methanol	Best		I	I													
		Worst	*	*			*											
II	Formaldehyde	Best	I		I													
		Worst	*	*														
	Ethanol	Best	I	*			*											
		Worst	I	*		*												*
III	Heptane	Best	I	I														
		Worst	I	I				*										*
	Formic acid	Best	I	*	I	I												
		Worst	*	*	*	I												
	Xylene	Best	*	*	*	*												
		Worst	*	*	*	*												
IV	Dioxane	Best	*	*	*	I												
		Worst	*	*	*	*												
	Methyl formate	Best	*	*	*	I												
		Worst	*	*	*	I												
	Isopropyl Acetate	Best	*	*	*	I												
		Worst	*	*	*	I												
V	Propionaldehyde	Best		*	*	I												
		Worst		*	*	I												
	Propanol (-1)	Best		*	I	I												
		Worst		*	I	*												
VI	Acetonitrile	Best	I	*	I	I												
		Worst	I	*														
	Isobutyl Acetate	Best	*	*	*	*												
		Worst	*	*	*	*												
VII	Benzaldehyde	Best	*	*	*	*												
		Worst	*	*	*	*												
	Tetrahydrofuran	Best																
		Worst																
	Dichloromethane	Best																
		Worst																
	Methyl Isobutyl Ketone	Best	I	*	I	I												
		Worst		*				*										

Figure 6: Chart of the best treatment method for binary mixtures for Ecoindicator-99

		I		II		III		IV		V		VI		VII					
		Methanol	Formaldehyde	Ethanol	Heptane	Formic acid	Xylene	Dioxane	Methyl formate	Isopropyl Acetate	Propionaldehyde	Propanol (-1)	Acetonitrile	Isobutyl Acetate	Benzaldehyde	Tetrahydrofuran	Dichloromethane	Methyl Isobutyl Ketone	
I	Methanol	Best	I	*	*			D								D	D	D	
		Worst	I				*												D
II	Formaldehyde	Best	I	*	*											D	D	D	
		Worst	I																D
	Ethanol	Best	I		*			*	D								D	D	D
		Worst	I															D	D
III	Heptane	Best	I	I	*			D								D	D	D	
		Worst	I	*														D	D
	Formic acid	Best	I	I	*	*												D	D
		Worst	*	*															D
	Xylene	Best	I															D	D
		Worst	I																D
IV	Dioxane	Best	I	*	*												D	D	
		Worst	*	*														D	
	Methyl formate	Best	I	I	*	*										D		D	
		Worst	*	*															D
	Isopropyl Acetate	Best	*	*	*	*													D
		Worst	*	*	*	*													D
V	Propionaldehyde	Best	I	*	*	*										D	D	D	
		Worst	I	*															D
	Propanol (-1)	Best	I	I	*	*													D
		Worst	I	*															
VI	Acetonitrile	Best	*	*	*												D	D	
		Worst	*	*															D
	Isobutyl Acetate	Best	I	*	*	*													D
		Worst	I	*															D
VII	Benzaldehyde	Best	*	*	*														D
		Worst	*																D
	Tetrahydrofuran	Best	*																D
		Worst	*																D
Dichloromethane	Best																	D	
	Worst																	D	
Methyl Isobutyl Ketone	Best		*													D	*		
	Worst																		

Figure 7: Chart of the best treatment method for binary mixtures for UBP- 97

		I		II		III			IV			V		VI		VII			
		Methanol	Formaldehyde	Ethanol	Heptane	Formic acid	Xylene	Dioxane	Methyl formate	Isopropyl Acetate	Propionaldehyde	Propanol (-1)	Acetonitrile	Isobutyl Acetate	Benzaldehyde	Tetrahydrofuran	Dichloromethane	Methyl Isobutyl Ketone	
I	Methanol	Best		*			*												
		Worst		*	*											D			D
II	Formaldehyde	Best	I		I		*												
		Worst	I		*											D			D
	Ethanol	Best	I	*				*											
		Worst	I	I		I											D		D
III	Heptane	Best		*			*									D			
		Worst	I		*														D
	Formic acid	Best	I	*	I	I													
		Worst	*		*														D
	Xylene	Best	I	*		*													
		Worst	*		*														D
IV	Dioxane	Best	I	*	I	I													
		Worst	*		*	*												D	
	Methyl formate	Best	I	*				*								D			
		Worst	*		*	*													D
	Isopropyl Acetate	Best	I	*	*	I													
		Worst	*		*	*													D
V	Propionaldehyde	Best		*	*														
		Worst	*		*	*													
	Propanol (-1)	Best		*	*	*													
		Worst	*		*	*													
VI	Acetonitrile	Best	I	*			*												
		Worst	*		*	*												D	
	Isobutyl Acetate	Best	I	*		I													
		Worst	*		*	*													
VII	Benzaldehyde	Best	I	*	*	I													
		Worst	*		*	*													
	Tetrahydrofuran	Best	*														*		
		Worst																	
Dichloromethane	Best																		
	Worst																		
Methyl Isobutyl Ketone	Best	I	*	I	I		*												
	Worst	*		*	*														

Figure 8: Chart of the best treatment method for binary mixtures for GWP;

		I		II		III		IV		V		VI		VII				
		Methanol	Formaldehyde	Ethanol	Heptane	Formic acid	Xylene	Dioxane	Methyl formate	Isopropyl Acetate	Propionaldehyde	Propanol (-1)	Acetonitrile	Isobutyl Acetate	Benzaldehyde	Tetrahydrofuran	Dichloromethane	Methyl Isobutyl Ketone
I	Methanol	Best		*	I	I										D		D
		Worst		*	I	I											D	
II	Formaldehyde	Best	I		I	I										D		D
		Worst	I		I	I											D	
	Ethanol	Best	*	*		I										D		D
		Worst	I	*		*											D	
III	Heptane	Best	I				I									D		D
		Worst	I	*													D	
	Formic acid	Best	*	*	*	I										D		D
		Worst	*	*		I											D	
	Xylene	Best				I										D		D
		Worst	*	*		I											D	
IV	Dioxane	Best	*		*	I										D		D
		Worst	*	*		I											D	
	Methyl formate	Best	*		*											D		D
		Worst	*	*	*	I											D	
	Isopropyl Acetate	Best	*		*	I										D		D
		Worst	*	*	*	I											D	
V	Propionaldehyde	Best		*	*	*										D		D
		Worst		*	*	I											D	
	Propanol (-1)	Best		*		I										D		D
		Worst		*		I											D	
VI	Acetonitrile	Best		*	I	I										D		D
		Worst	*	*	I	I											D	
	Isobutyl Acetate	Best	*		*											D		D
		Worst	*	*	*	I											D	
VII	Benzaldehyde	Best	*		*	*										D		D
		Worst	*		*	*											D	
	Tetrahydrofuran	Best														D		D
		Worst															D	
	Dichloromethane	Best														D		D
		Worst				*											D	
	Methyl Isobutyl Ketone	Best	*		*	I										D		D
		Worst	*	*	*	I											D	

Figure 9: Chart of the best treatment method for binary mixtures for CED;

		I		II		III		IV		V		VI		VII					
		Methanol	Formaldehyde	Ethanol	Heptane	Formic acid	Xylene	Dioxane	Methyl formate	Isopropyl Acetate	Propionaldehyde	Propanol (-1)	Acetonitrile	Isobutyl Acetate	Benzaldehyde	Tetrahydrofuran	Dichloromethane	Methyl Isobutyl Ketone	
I	Methanol	Best		*			*												
		Worst		*	*	*										D			D
II	Formaldehyde	Best	I		*		*									D			
		Worst	I		*	*										D			D
	Ethanol	Best	I	*				*									D		D
		Worst	I	*		I		*									D		D
III	Heptane	Best	I	*												D			
		Worst	I	*	*											D			D
	Formic acid	Best	I	*	I	I		*											
		Worst	*	*	*			*											D
	Xylene	Best		*													D		
		Worst	I	*	*	*											D		D
IV	Dioxane	Best	I	*	I		*												
		Worst	*	*	*	*										D		D	
	Methyl formate	Best	I	*	*	*		*								D			
		Worst	I	*	*	*		*								D			D
	Isopropyl Acetate	Best	*	*	*	I		*											D
		Worst	*	*	*	*		*											D
V	Propionaldehyde	Best	I	*	*	*	*												
		Worst	*	*	*	*		*											
	Propanol (-1)	Best	*	*	*	*		*											
		Worst	*	*	*	*		*											D
VI	Acetonitrile	Best	I	*	*	*	*												
		Worst	*	*	*	*		*										D	
	Isobutyl Acetate	Best	I	*	*	I		*											
		Worst	*	*	*	*		*											D
VII	Benzaldehyde	Best	I	*	*	I	*												
		Worst	*	*	*	*		*										D	
	Tetrahydrofuran	Best	*	*	*	*		*											
		Worst	*	*	*	*		*											
Dichloromethane	Best	*	*	*	*		*												
	Worst	*	*	*	*		*												
Methyl Isobutyl Ketone	Best	I	*	I	*		*								D				
	Worst	*	*	*	*		*								D				

Figure 10: Chart of the best treatment method for binary mixtures for CO<sub>2</sub>

In Figure 6, three different parts can be observed. On the left side, where the recovery of the solvent with a low impact is considered, the yellow color is prevailing, indicating that incineration is the best technology, although with some uncertainty for some compounds. In particular, mixtures of methanol, formaldehyde, ethanol, heptane and xylene show a clear advantage for using incineration. Moving to the middle (colorless), no statistical differences can be observed between applying incineration or distillation. Finally, an area colored in green on the right side can be observed. In this case, distillation presents a clear advantage for the recovery of the solvents THF, acetonitrile, benzaldehyde, isobutyl acetate and MIK. These solvents can be considered as compounds that should be always recovered. Indeed, these solvents have the highest values of environmental impact during the solvent production (see Fig. 1 and Table S1). Also in the low part of the table, the uncertainty is higher because mixtures with a low impact (methanol, ethanol, heptanes, etc) and a high impact (THF, benzaldehyde, isobutyl acetate, etc) solvents are analyzed. In addition, unless for MIK, whenever the main compound is a low impact solvent during the production stage, distillation and incineration can have the same impact. However, incineration remains the best technology when isobutyl acetate, benzaldehyde and tetrahydrofuran are in the mixture. A higher uncertainty (yellow light colour) is observed in the lower part. Finally, dichloromethane shows a large uncertainty whenever it is recovered or it is the second compound (second last row). Furthermore, the best case has a lower uncertainty than the worst case. Regarding the other indicators, some differences can be observed. The environmental indicator UBP 97 (Figure 7) shows a reduction of the region where incineration shows an environmental advantage and with a higher uncertainty. However, the area where distillation takes advantage (green), it is larger than the ECO-I 99's chart, with the best performance when MIK is the target compound. In this chart, it is possible to notice an

alternation of colorless and green boxes in the middle part, which is due to the way in which the solvents are ordered (following the levels of impact of the Ecoindicator-99).

Also, in the case of CO<sub>2</sub> balance and GWP, the results are similar to Figure 8 and 10, but with some differences. On the left side, the incineration is always the best technology, but in the recovery of methanol, heptane and ethanol for the best case incineration shows good results when they are incinerated with the solvents of the central part. Instead, a higher uncertainty was found for the recovery of formaldehyde. The compounds in the middle part present more advantages for recovery by using distillation than in the case of ECO-I 99. The only exception is methylformate, which should be taken out of its impact level, because it has a unlike performance compared to the other solvents in the same level (IV). Furthermore, for these environmental indicators, the worst case has a lower uncertainty than the best case, in particular when the solvent production impact increases.

The performance for Ecoindicator-99 is the same for CED (Figure 9). The only exceptions are dichloromethane, where distillation is the best technology, while acetonitrile has a large uncertainty whenever it is recovered. Some differences can be found with UBP- 97, mostly with the alternation and the results for the recovery of MIK described above. Furthermore, ECO-I 99 results shown good performances with all other indicators, in particular with CED, while CO<sub>2</sub> balance and GWP have the same results.

From the charts, it is clear that methanol should be always incinerated, as well ethanol-formaldehyde and heptane-xylene. Dicholoromethane confirmed the high uncertainty related to the solvent production phase, thus, it is difficult to extract valuable information when dichloromethane is present in the mixture as the second compound. Furthermore, formic acid showed a complete uncertainty for all the maps.



It has also been noticed that methyl isobutyl ketone showed the best results for distillation in the case of UBP-97, confirming that the value of solvent production gives important information to predict the best technology. In fact, for the others environmental indicators, THF has the highest burden during the solvent production and consequently the best results if it is recovered. Furthermore, THF shows a high uncertainty when it is not the compound to recover, due to its large interval of confidence. As a conclusion, it can be generally stated that solvents with high impact during the production stage should be recovered by distillation and those solvents with lower impact should be incinerated to take advantage of energy production.

From the charts, the following criteria can be established:

- solvents with a high impact during the production should be recovered by distillation.
- solvents with a low impact during the production should be incinerated.
- for solvents with a medium impact during the production, distillation and incineration may show the same advantage and a more detailed study considering specific data for the real process should be performed.

### 3.3 Examples of binary mixtures

Some binary mixtures with different impact during the production step (low, medium or high impact) have been selected to show in detail the cases of impact in the two scenarios, best and worst: high impact-low impact, high impact-high impact, low impact-low impact, high impact-medium impact, medium impact-low impact, and low impact-low impact. The results are reported in Figure 11 when distillation aims at recovering the first solvent (S1) or the second solvent (S2) and the case of incineration.

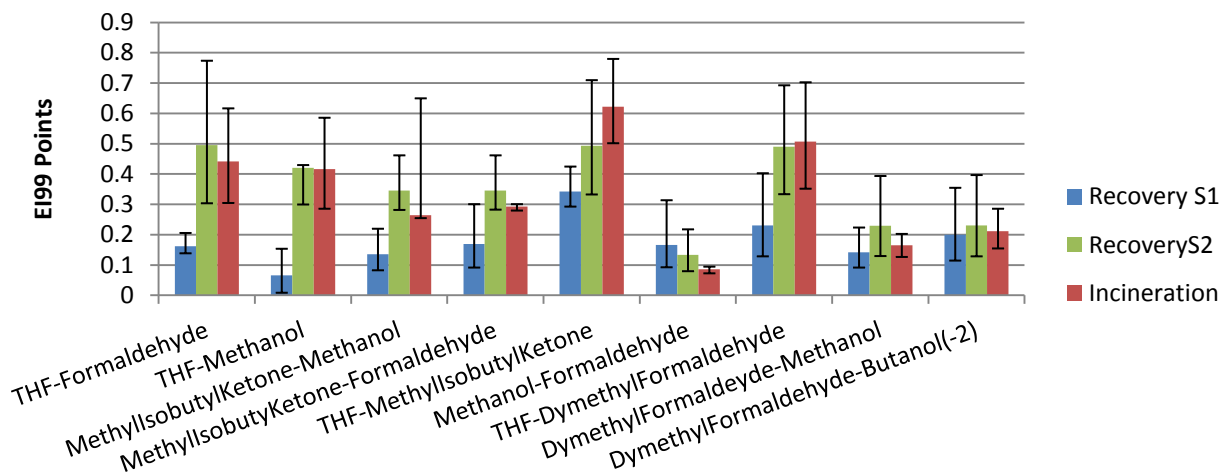


Figure 11.a: Example ECO-I 99, Best Case;

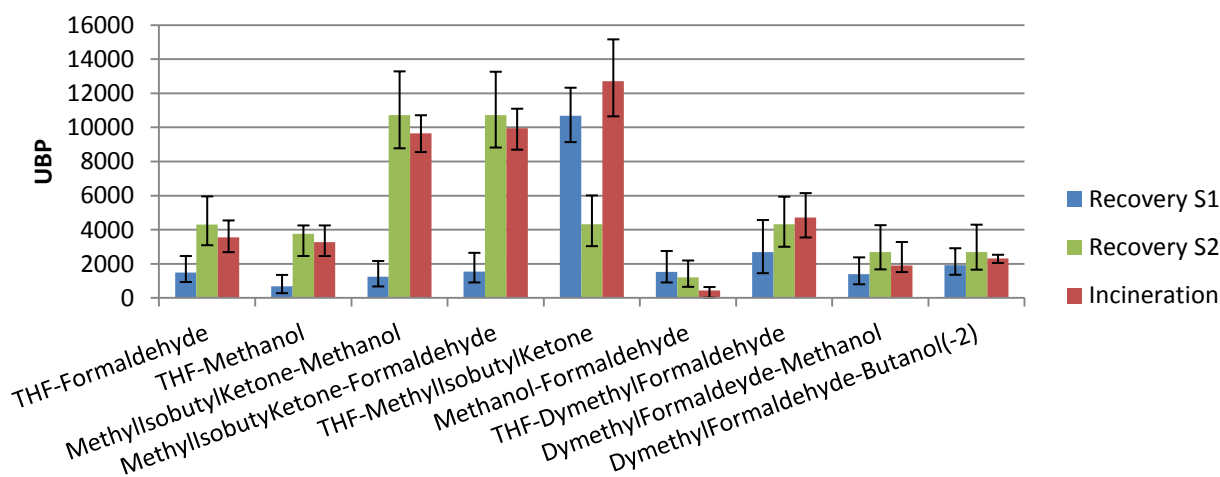


Figure 11.b: Example UBP-97, Best Case;

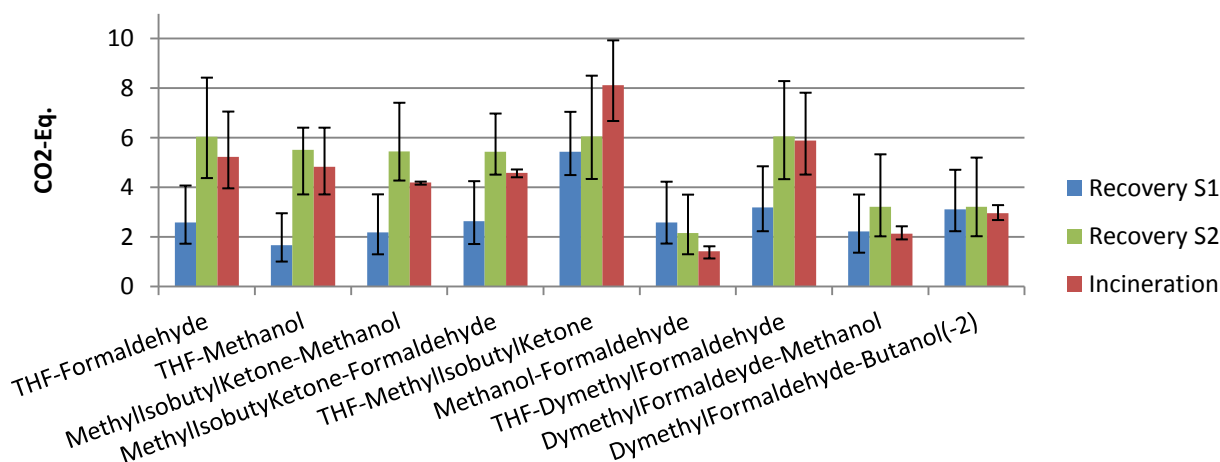


Figure 11.c: Example GWP, Best Case;

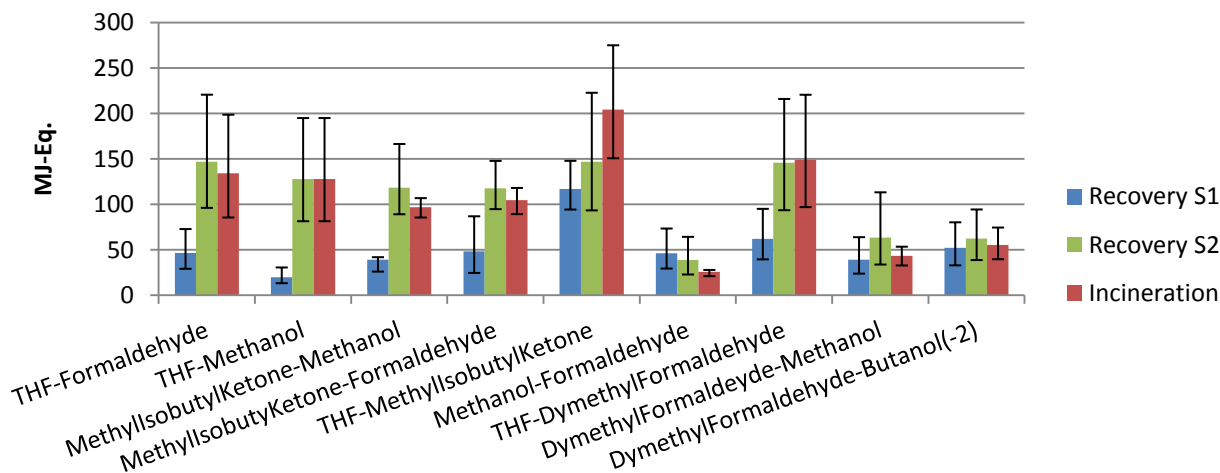


Figure 11.d: Example CED, Best Case;

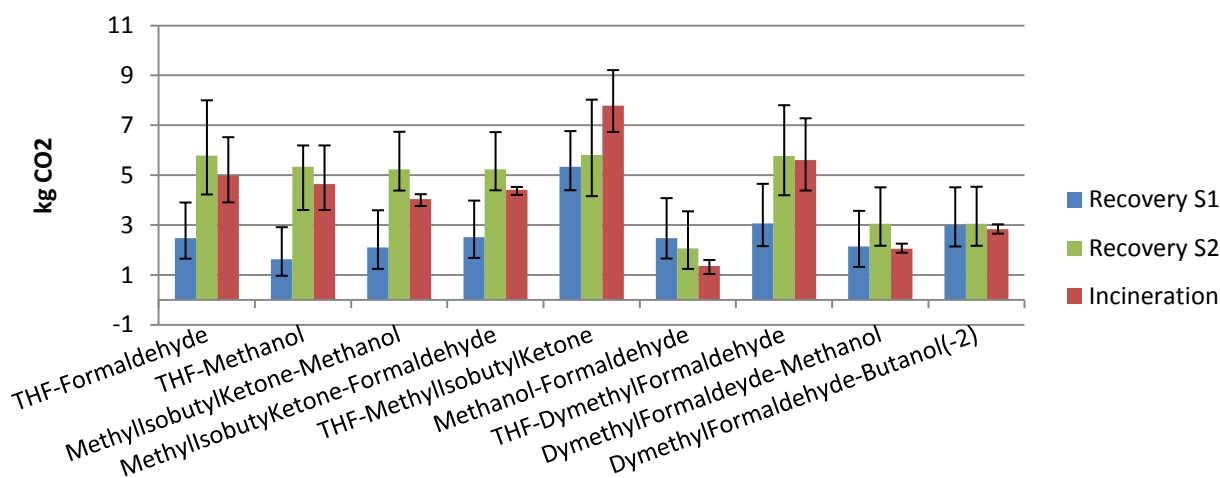


Figure 11.e: Example CO2, Best Case;

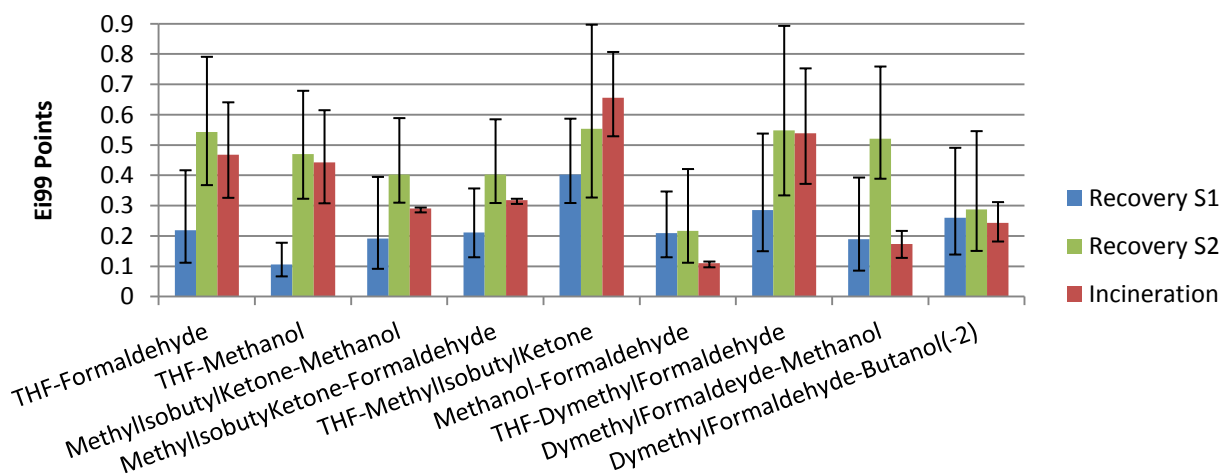


Figure 12.a: Example ECO-I 99, Worst Case;

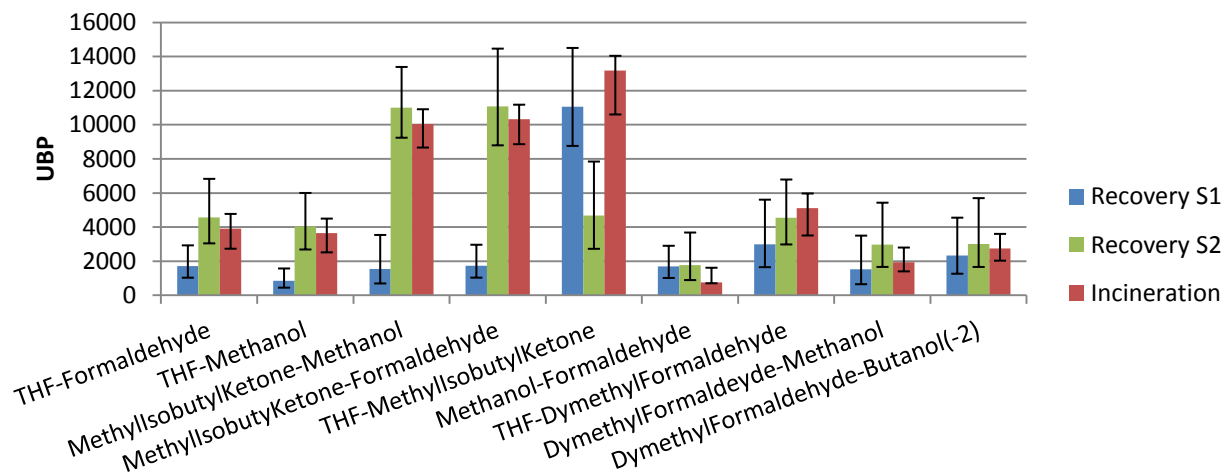


Figure 12.b: Example UB-P97, Worst Case;

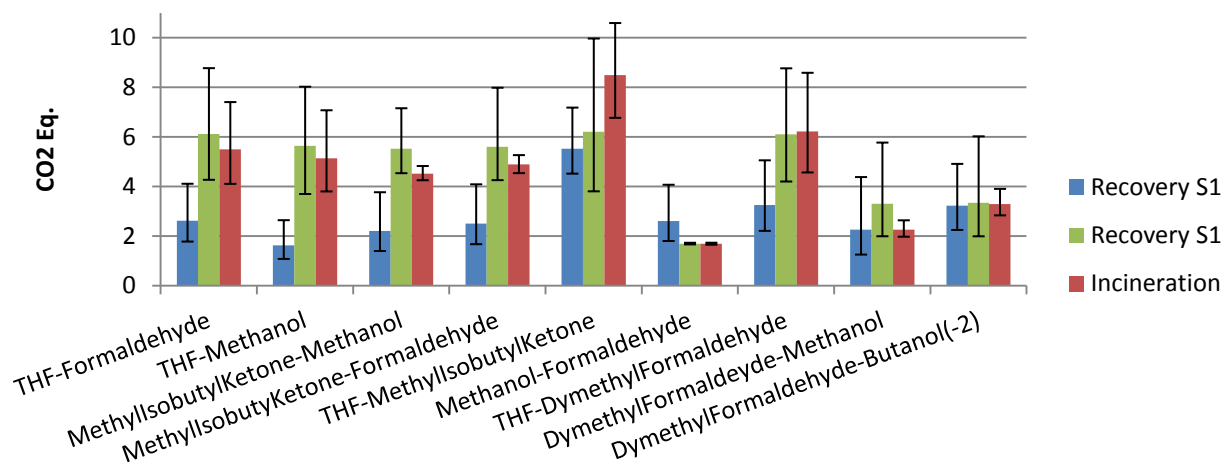


Figure 12.c: Example GWP, Worst Case;

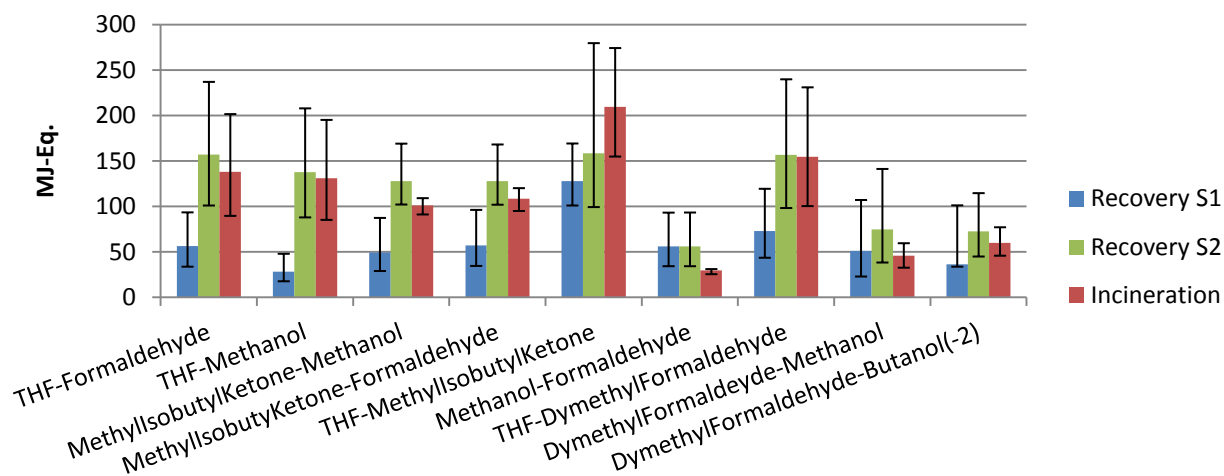


Figure 12.d: Example CED, Worst Case;

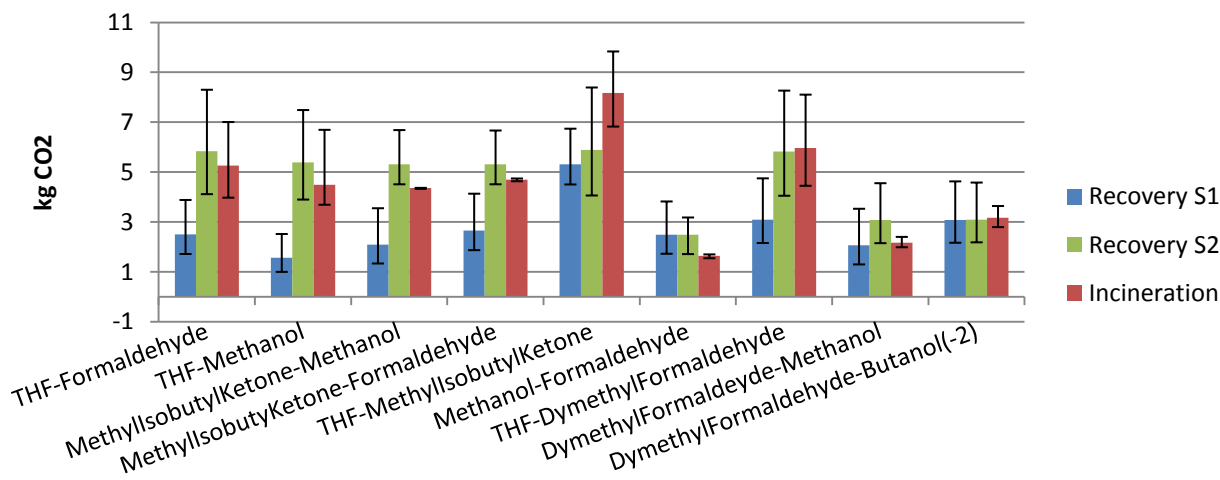


Figure 12.e: Example CO<sub>2</sub>, Worst Case;

The mixtures tetrahydrofuran-formaldehyde, tetrahydrofuran-methanol, methyl isobutyl ketone-formaldehyde and methyl isobutyl ketone-methanol have been chosen as representatives of a binary mixture with one solvent that produces a high environmental burden during the production (*i.e.*, THF, MIK, acetonitrile, benzaldehyde) and one solvent with a low environmental burden (*i.e.*, methanol, ethanol, heptane, xylene). Figure 11.a shows the impacts (ECO-I 99) when the first or second solvent are the target to be recovered by distillation and when the mixture is incinerated. It can be observed that the solvent (S1) with a high impact during the production, shows preference for recovery by distillation. Instead, if the solvent with low impact is recovered (S2), the incineration is better from an environmental point of view.

For the mixture THF-MIK, both high impact solvents, distillation is better than incineration, the recovery of THF being advantageous in comparison with the recovery of MIK. When there are two low impact solvents (methanol-formaldehyde), the value of ecopoints is very low and there is a large uncertainty, although the incineration shows a lower impact. Finally, for medium impact-low impact compounds in mixtures, the incineration is better than distillation if the low impact

solvent (S2) is recovered. A large uncertainty is shown when the medium impact solvent is recovered (S1) as for the last mixture dimethyl formaldehyde-butanol(-2).

With UBP-97, the situation is different, because the solvent with the highest impact is methyl isobutyl ketone (MIK). When MIK is present in the mixture but it is not the target compound to be recovered, the impact is very high (mixtures MIK-methanol, MIK-formaldehyde, MIK-THF). However, in mixtures with THF (THF-methanol, THF-formaldehyde, THF-dimethyl formaldehyde) the value of impact is lower (for the recovery of S1, recovery of S2 or incineration) than the case of mixtures with MIK. Nevertheless, the recovery of the component with higher impact has always a benefit from an environmental point of view. In fact, it is important to notice how in the mixture THF-dimethyl formaldehyde (high impact-medium impact) the uncertainty is much lower than the same mixture but with another indicator. Also the values of impact are completely different, when MIK is present (mixtures MIK-methanol, MIK-formaldehyde, MIK-THF).

It is interesting to compare the situation for the mixture THF-MIK for the Figures 11 a.b and 12 a.b. For the Figure 11.a and 12.a, if THF is recovered, distillation has the lowest impact, but in the Figures 11.b and 12.b the impact of distillation is partially overlapped with incineration. The situation is the opposite for the two indicators if MIK is recovered, in the case of ECO-I 99 the recovery of MIK shows a lower mean value than incineration, but with a large uncertainty, instead for UBP-97 MIK is always better to recover. That shows again the idea that the solvent with the highest impact should be recovered. Indeed, this situation is observed only for UBP-97, while for the other indicators, THF shows always the lowest environmental burden if it is recovered. Furthermore, in the figures 11.c-e, a similar performance with the results of ECO-I 99 can be noticed. However, the difference between distillation and incineration with these indicators is lower. Mostly for the last mixtures (dimethyl formaldehyde-butanol(2-) and

dimethyl formaldehyde-methanol), those compounds with the same impact or very similar show a big uncertainty (the mean values are very close) but with a lower interval of confidence for incineration, which suggests incineration as the best treatment alternative. Thus, the impact values with ECO-I 99, GWP, CED and CO<sub>2</sub> indicators, for both the scenarios, have the same magnitude for all mixtures except when THF is to be recovered. However, UBP-97 does not follow this trend. The main reason is in the high value of MIK in the UBP indicator, which has no correspondence with the value for other indicators. For the worst scenario (Fig. 12.a-e), for all the indicators, the main difference found with the best scenario is the larger uncertainty but the results have the same trend.

Thus, in agreement with the developed criteria in the previous section, if methanol or formaldehyde are recovered (low impact compounds), incineration is the best treatment technology. On the contrary, distillation is the best alternative with MIK and THF, high impact compounds. Less information can be obtained when the main compounds to be recovered are medium impact solvents.

Thus, these guidelines give useful information for the preliminary decisions that take place during the design of a process, such as the choice of solvents considering their environmental impact. Nevertheless, in this work, only distillation has been considered as the recovery option but it does not exclude the possibility that another technology for solvent recovery presents a better potential, such as membrane-based technologies<sup>7</sup>. Great research opportunities are opened in this field.

## CONCLUSIONS

The treatment of chemical solvents is an important issue in the chemical industry. Particularly in the pharmaceutical and specialty chemical industry, organic solvent accrues in large amounts due to complex production routes. In this work, life cycle assessment is presented as a tool to be used during the decision making to help on the choice of the solvent during the process design and which technology is the most appropriate for the treatment of chemical solvents from an environmental point of view. In this field another work showed, using two different tools, usefulness to have a reference at the beginning for decision making. In our work we want to improve the information present using several ecoindicators and considering more particular and real situation, as high purity 99% and a composition of the mixture.

First, the studied solvents have been grouped in levels according to the environmental impact produced during the solvent manufacture, giving an overview of their environmental burden. Next, charts of binary mixtures have been developed for each environmental indicator. These charts indicate whether distillation or incineration should be applied depending on the composition of the mixture, and if distillation takes advantage, which solvent should be recovered. They offer a tool for the user to decide at the beginning of the process design which technology (distillation or incineration) is the best from an environmental point of view, knowing only the chemical composition, but mostly they allow determining which solvent would produce the lowest impact. The charts are built on the basis that for solvents with low impact during its manufacture, incineration is the best technology, and, if the main compound has a high impact, distillation takes advantage. When the component to be recovered in the mixture has a medium impact, a more detailed analysis is required due to the uncertainty of the values, for example via simulation of the real process to achieve real values and combination with life cycle assessment using as input data those obtained from the simulation.



It can be thus concluded that when components such as methanol, ethanol, heptane, xylene, acetic acid, n-hexane, methyl-ethyl-ketone, mono-chloro-benzene, iso-propanol, MTBE, di-methoxy-ethane, iso-hexane, xylene, pentane, formaldehyde, methyl acetate, diethylethere are present in the mixture, they should be incinerated since their recovery presents no environmental benefits. On the other hand, for the solvents with high impact during their production, such as THF, MIK, acetonitrile, benzaldehyde, butyl acetate, benzyl alcohol, iso-amyl acetate and iso-butyl acetate, distillation becomes the best technology in order to minimize the production. Regarding the information given by different indicators, all the studied indicators (Ecoindicator-99, UBP-97, GWP, CED, CO<sub>2</sub>) have the same general trend, with the only exception of UBP-97, which has some different results for the impact during the solvent production and which solvents have to be recovered. Furthermore, the worst case scenario has a higher uncertainty than the best case scenario.

**Acknowledgments** The Research Council of KU Leuven is gratefully acknowledged for providing a PhD grant to A. Amelio (OT/2012). P. Luis acknowledges the support by a Marie Curie–CIG Career Integration Grant (PCIG9-GA-2011-294218). The authors also acknowledge financial support from The Environmental & Energy Technology Innovation Platform (MIP).

## REFERENCES

- 1 C. Capello, S. Hellweg and K. Hungerbühler, *J. Ind. Ecol.*, 2008, 12, 111–127.
- 2 G. Wypych in *Handbook of solvents*, Chem. Tec. Publishing, Toronto, 2001.
- 3 T.B. Hofstetter, C. Capello and K. Hungerbühler, *Process Saf. Environ. Prot.*, 2003, 81(Part B), 189–202.

- 4 Rockwell Automation,  
[http://literature.rockwellautomation.com/idc/groups/literature/documents/wp/ssb-wp001\\_-en-e.pdf](http://literature.rockwellautomation.com/idc/groups/literature/documents/wp/ssb-wp001_-en-e.pdf), December 2009.
- 5 M.J. Raymond, C.S. Slater and M.J. Savelski, *Green Chem.* 2010, 12, 1826–1834.
- 6 P. Luis, A. Amelio, S. Vreysen, V. Calabro and B. Van der Bruggen, *Int. J. Life Cycle Assess.*, 2013, 18(5), 1048-1061.
- 7 P. Luis, A. Amelio, S. Vreysen, V. Calabro and B. Van der Bruggen, *Appl. Energy*, 2014, 113, 565–575.
- 8 W.A. Carole, C. S. Slater, M. J. Savelski, T. Moroz, A. Furiato and K. Lynch, *Proceedings of the 8th International Conference on EcoBalance*, Tokyo, 2008, 235-238.
- 9 EN ISO 14040: 1997, *Environmental management - Life cycle assessment - Principles and framework*, Brussels, Belgium: European Comitee for Standardisation.
- 10 R. Jaques, presented at the 32nd Annual Conference of the Australia and New Zealand Architectural Science Association, Paper No. 47, 1998.
- 11 C. Capello, S. Hellweg, B. Badertscher, H. Betschart and K. Hungerbühler, *J. Ind. Ecol.*, 2007, 11(4), 26–38.
- 12 C. Seyler, S. Hellweg, M. Monteil and K. Hungerbühler, *Int. J. Life Cycle Assess.*, 2004, 10(2), 120–130.
- 13 C. Seyler, T.B. Hofstetter and K. Hungerbühler, *J. Clean Prod.*, 2005, 13, 1211–1224.
- 14 C. Jimenez-Gonzalez, M. Overcash and A. Curzons, *J. of Chem. Technol. and Biotechnol.*, 2001, 76(7), 707–716.

- 15 C. Capello, S. Hellweg, B. Badertscher, and K. Hungerbühler, *Environ. Sci. Technol.*, 2005, 39, 5885–5892.
- 16 C. Capello, U. Fischer and K. Hungerbühler, *Green Chem.*, 2007, 9, 927–934.
- 17 D. Weber and C. Capello, *User guide: the ecosolvent tool*, ETH Zurich, Safety & Environmental Technology Group, Zurich, 2006.
- 18 M. Goedkoop and R. Spriensma PRé Consultants b.v., Amersfoort, Amersfoort, 2nd edn., 2000.
- 19 N. Jungbluth and R. Frischknecht, *Cumulative energy demand. Implementation of Life Cycle Impact Assessment Methods*, ecoinvent 2000 Report No. 3, EMPA, Dübendorf, 2004.
- 20 R. Hischier, *The method of ecological scarcity (Umweltbelastungspunkte, UBP'97)*, *Implementation of Life Cycle Impact Assessment Methods*, ecoinvent 2000 Report No. 3, EMPA, Dübendorf, 2004.
- 21 J.T. Houghton, Y. Ding, D.J. Griggs, M. Noguera, P.J. van der Linden, X. Dai, K. Maskell and C.A. Johnson, *IPCC (2001) Climate change 2001: the scientific basis, Third assessment report*, IPCC, Cambridge, 2001.
- 22 M. Goedkoop, R. Heijungs, M. Huijbregts, A.D. Schryver, J. Struijs, and R. Van Zelm, *ReCiPe 2008: a life cycle impact assessment method which comprises harmonised category indicators at the midpoint and the endpoint level*, Report I. VROM, Den Haag, 2009.
- 23 T. Benko, A. Szanyi, P. Mizsey and Z. Fonyo, *Cent. Eur. J. Chem.*, 2006, 4(1), 92–110.