

Journal of Materials Chemistry A

Accepted Manuscript



This is an *Accepted Manuscript*, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this *Accepted Manuscript* with the edited and formatted *Advance Article* as soon as it is available.

You can find more information about *Accepted Manuscripts* in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this *Accepted Manuscript* or any consequences arising from the use of any information it contains.

A Novel Damage-tolerant Superhydrophobic and Superoleophilic Material

Xia Zhang ^{a*}, Yonggang Guo ^b, Hengzhen Chen ^a, Wenzhong Zhu ^a, Pingyu Zhang ^a

A damage-tolerant superhydrophobic and superoleophilic bulk material is fabricated by a facile method. The novel bulk material demonstrates excellent resistance for oil fouling and can be used for water/oil separation. Different wettabilities have been realized on the material surface under UV irradiation, and the superhydrophobicity can be easily regenerated.

Superhydrophobic surfaces, which possess the virtue of having a large water contact angle (CA) and exhibit little sticking to water droplets, have numerous applications in self-cleaning,^{1,2} non-wetting fabrics,³⁻⁵ anti-fogging,⁶ anti-icing,^{7,8} buoyancy,^{9,10} and water-oil separation.¹¹⁻¹³ However, the susceptibility to mechanical abrasion and oil fouling severely hinders the use of superhydrophobic surfaces in practical applications.¹⁴ Mechanical abrasion on the superhydrophobic surfaces will destroy the microscopic roughness features that are essential for superhydrophobicity. Furthermore, mechanical abrasion also removes the hydrophobic surface layer, causing a decline in their non-wetting property. Similarly, any oil containments penetrating into the textured surfaces are hard to remove and thus negate the superhydrophobic behavior.^{15, 16} To suppress the oil contamination, fabrication of superoleophobic surfaces will be an appealing way but has proved extremely challenging. The challenge results from the difficulty in producing superoleophobic surfaces, which require some special structures and costly fluorochemicals to provide the needed surface roughness and surface energy. In addition, the superoleophobic surfaces are also fragile to mechanical contact for their fine surface structures, making the surfaces lose their superoleophobicity easily.¹⁴⁻¹⁶ Thus, seeking a right way to solve the mechanical damage and oil fouling problems has been an urgent demand.

^a Laboratory of Special Functional Materials, Henan University, Kaifeng 475001, China. E-mail: zx@henu.edu.cn

^b School of Mechanical and Electrical Engineering, Henan University of Technology, Zhengzhou 450007, China.

† Electronic supplementary information (ESI) available.

Despite the importance of mechanical durability in applications, less attentions have been paid to the key issue expect for several reported works until recently.¹⁷⁻²² Su et al. realized superhydrophobicity on an elastic material (polyurethane) to improve the abrasion resistance of the surface.²¹ Zhang et al. prepared a superhydrophobic metal/polymer composite surface possessing both mechanical durability and easy repairability.²⁰ Fabricating superhydrophobic bulk material possessing low-surface-energy microstructures extending throughout its whole volume is a new concept in designing damage-tolerant superhydrophobicity.¹⁹ This concept is illustrated in Fig. 1. The bulk material will sustain the rough surface textures after mechanical abrasion, ensuring continued superhydrophobicity. Based on the above concept, in this work, we aim to fabricate a durable and robust superhydrophobic surface by a facile approach.

Polypropylene (PP), as an essential engineering polymer material, is used in many industrial applications. Pure PP surface does not show superhydrophobicity in the absence of surface texture roughness. In this communication, we demonstrate inorganic/PP composite bulk materials that rely on inorganic particle fillers dispersion to improve the surface roughness. The bulk materials preserve the durable superhydrophobic property upon wear damage until being worn out. It is found that the obtained material surface shows oil-fouling repellency, and when a drop of tetradecane is added to the surface, it is quickly drawn into the texture of the surface. After 1 h storage at room temperature, the superhydrophobic wetting behavior returns. Considering the superhydrophobic and superoleophilic properties, the bulk materials can successfully be applied to separate the oil-and-water mixture. Interestingly, under UV irradiation, the water contact angle decreases gradually, and the bulk material surface eventually becomes hydrophilic. A reversible transition of surface wettability can be realized by alternation of UV illumination and removal of the uppermost layer upon mechanical abrasion.

The durable superhydrophobic material was prepared as follows: 1.0 g TiO₂ nanorods and 1.0 g hydrophobic SiO₂ nanoparticles (Fig. S1, ESI†) were dispersed in the mixed solution composed of 1,1,2,2-Tetrachloroethane (40 ml) and toluene (40 ml), followed by the addition of 0.4 g poly(dimethylsiloxane) vinyl terminated (PDMS) and stirred magnetically for about 10 min. Then, PP

(4.0 g) was added into the mixed solvent and stirred for about 5 h at $135\pm 5^\circ\text{C}$ until PP dissolved completely. The solution was cooled and dried at ambient temperature to get the $\text{SiO}_2/\text{TiO}_2/\text{PP}$ composite powder. The powder was placed into a mold and pressed under a pressure of 25 MPa at room temperature. After about three minutes, the sample was demolded. Herein, PDMS acts as a binder to improve the adhesion of the inorganic SiO_2 and TiO_2 to PP materials.

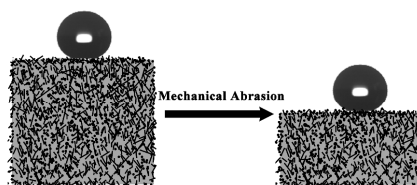


Fig. 1 Schematic illustration of the bulk material can still sustain the superhydrophobicity after mechanical abrasion because of the low-surface-energy microstructures extending throughout its whole volume.

In contrast to most superhydrophobic surfaces, the liquid repellency in this work exhibits high tolerance against mechanical damage. Abrasion of the bulk material or cutting deep into it does not result in the loss of superhydrophobicity. As shown in Fig. 2(a-d), water droplets exhibit typical spherical shapes on the abrasive or cut bulk material with a water contact angle about $158\pm 1^\circ$ and a low sliding angle $1\pm 0.5^\circ$ (Fig. 2e). Upon immersion in water, the bulk material surface acts like a silver mirror when viewed at a glancing angle (Fig. 2f), due to the total reflectance of light at the air layer trapped on the surface. This trapped air can effectively prevent a wetting on the fabric surface underwater.²³ We analyzed the long-term durability of superhydrophobic properties under continuous contact with water (Fig. S2a, ESI†). It was found that the bulk material surface still sustained the superhydrophobic with CA value $154\pm 1^\circ$ even after being immersed in water for 3 h. When further increasing the immersion time to 5 h, the CA value decreased to $145\pm 2^\circ$. It is clear that increasing the immersion time of a superhydrophobic surface in water facilitates the deterioration of contact angle values. The growth of adsorption/wetting films and hydrolysis on material surface may be responsible for deterioration of contact angle values,²³⁻²⁴ and the detailed mechanisms will be discussed in

Supporting Information. When studying the durability of the superhydrophobic bulk material, continuous contact with corrosive solution needs to be considered. Compared with the pure water, corrosive solution facilitates the degradation of superhydrophobic property easier. However, the obtained material can still sustain its water CA values more than 150° in strong acidic solution for about 1 h, indicating the good corrosion resistance (Fig. S2b, ESI†). It is interesting to note that a water droplet (6 μL) suspending on the syringe can hardly be pulled down to the surface even when the droplet is squeezed (Fig. 2g-j), and video S1 (ESI†) shows the ultra-low adhesion of the surface with water. If the water droplet happens to drop down from a very short distance, it rolls off easily ($\text{SA} < 1^\circ$). These observations suggest that the sliding angle is extremely low and there is a very low resistance during the rolling process.

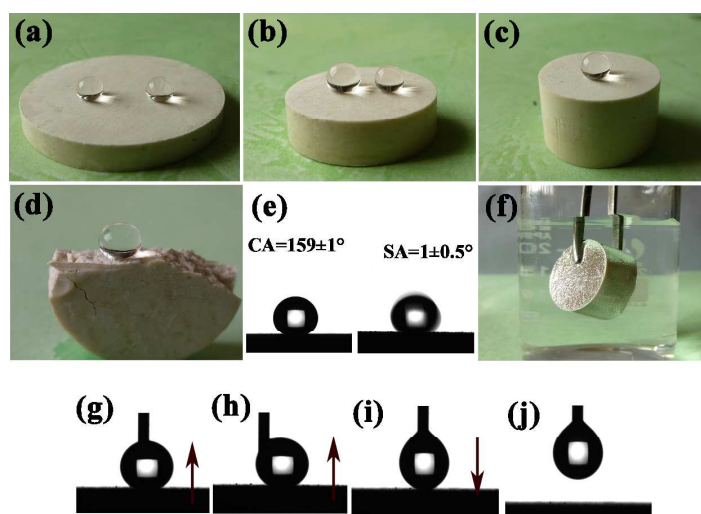


Fig. 2 Optical images of the water droplets (6-9 mg) placed on the as-prepared bulk (a-c) or cut (d) material surface. (e) Shape of water droplet on the bulk material surface with a contact angle of $159 \pm 1^\circ$ and sliding angle of $1 \pm 0.5^\circ$. (f) Mirror-like phenomenon can be observed on the bulk material submerged in water. (g-j) Contact, deformation and departure processes of a water droplet suspending on a syringe with respect to the bulk material surfaces. The arrows represent the moving direction of the obtained bulk material.

Considering the mechanical durability of the bulk material, we investigated the inner microstructure and the surface microstructure after abrasion. As shown in Fig. 3(a, b), the inner of the bulk

nanocomposite material contains micrometer scale roughness features that have an additional nanoscale roughness. It is believed that the nanostructure SiO_2 and TiO_2 aggregations affect the surface roughness, and on the other hand, hydrophobic SiO_2 nanoparticles change the surface energy. Both of these factors are responsible for inducing the superhydrophobic behavior. Compared with the inner of the bulk material, the microstructure after mechanical abrasion has no obvious difference (Fig. 3c, d). Both of the micro or nanoscale roughness features are similar as the inner. The obtained material is tolerant to damage as a fresh surface with micro and nanoscale topography exposed upon mechanical damage. A video of water droplets rolling off the surface after abrasion by sandpaper (800 mesh) is available in the Supporting Information (Video S2, ESI[†]), from which one can see that the abrasion process can be carried out repeatedly, each time removing a few layer of materials and generating a new superhydrophobic surface which is similar to the previous one. Hence, the superhydrophobic bulk materials demonstrate mechanical abrasion resistance until having been worn out. Herein, the conventional ball-on-flat tribometer experiment was also conducted to investigate the wear behavior of the superhydrophobic bulk material (Fig. S3, ESI[†]).

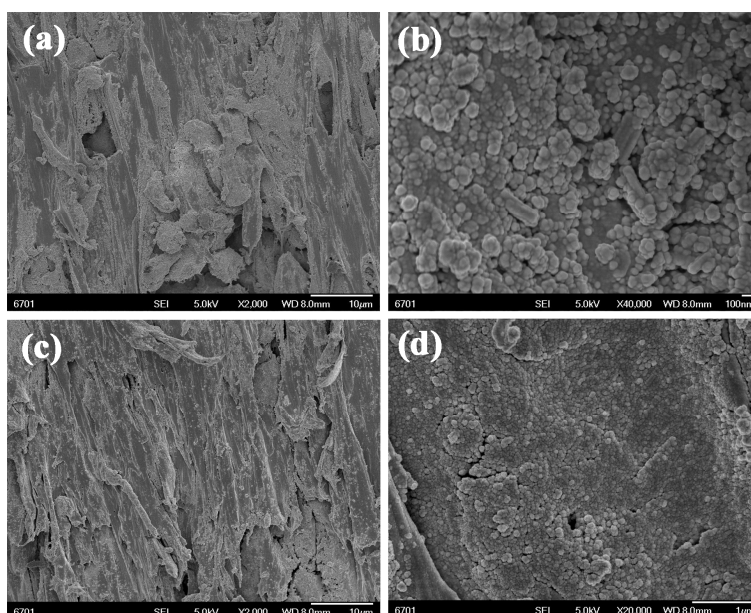


Fig. 3 FESEM images of the interior bulk material (a, b), and the bulk material surface after abrasion with sandpaper (c, d).

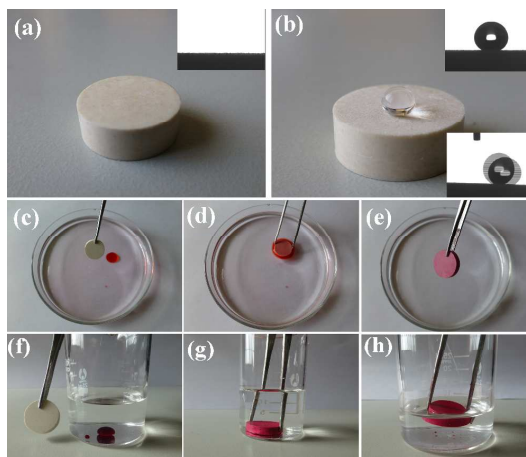


Fig. 4 (a) The spreading of tetradecane (20 mg) on the superhydrophobic material surface with oil CA value 0° . (b) 1 h later, the coating recovered to its superhydrophobicity with water CA value $158\pm 1^\circ$ and $SA < 5^\circ$. (c-e), (f-h) Photographs showing the removal processes of tetradecane and chloroform from water using the as-prepared bulk material, respectively.

Most of the superhydrophobic surfaces work well merely for hydrophilic contaminants rather than oily contaminants, since oily contaminants usually lead to the loss of superhydrophobicity. In this study, we investigated the resistance of the as-prepared bulk material to oily contaminants by using tetradecane as a control. As shown in Fig. 4, a drop of tetradecane (20 mg) spreads quickly over the surface with the contact angle about 0° (Fig. 4a). That is, the bulk nanocomposite material, which demonstrates superhydrophobic behavior, also shows superoleophilicity. The water CA value decreases from superhydrophobic to hydrophobic state upon the oil-fouling surface (Fig. S4, ESI[†]). Surprisingly, the surface restores its superhydrophobic wetting behavior ($CA=158\pm 1^\circ$ and $SA < 5^\circ$) after storage at ambient temperature for about 1 h. These results indicate that the superhydrophobic surfaces are resistant with regard to oil fouling. It is suggested that the tetradecane can penetrate through the structured surface due to the superoleophilicity of the bulk material. In addition, the wetting difference between water and oil on the bulk surface may provide a strategy to separate a water and oil mixture, and the oil/water separation experiments demonstrate the bulk material can be used to separate both light oils (lower density than water) and heavy oils (higher density than water). As shown in Fig. 4(c-e),

the obtained materials can selectively adsorb oil floating on water surface within a few seconds, leaving a transparent region on the water surface. Fig. 4(f–h) shows the images of the removal process of chloroform underwater. When the as-prepared sample was inserted into water to approach chloroform, the chloroform droplet could be immediately sucked up and removed.

Tuning the surface wettability is of great interests for both scientific research and practical applications. So far, materials with tunable wettability have been developed and realized on many transition-metal oxide surfaces, such as TiO_2 , ZnO etc. Under UV irradiation, the hydrophobic/superhydrophobic oxide surfaces turn to hydrophilic/superhydrophilic.^{25–29} As shown in Fig. 5, under UV (obtained from a 8 W Hg lamp with a wavelength 254 nm) irradiation, the water CA of nanocomposite material surface decreases gradually with exposure time. After 5 h, the CA reaches a low value of 84° , indicating the wettability changes from superhydrophobic to hydrophilic. In order to restore the original superhydrophobicity, it just needs to remove the UV irradiated layer upon mechanical abrasion and expose the interior of the superhydrophobic bulk material. Note that the switchable wettability process can be continuously repeated until the bulk material has been worn out.

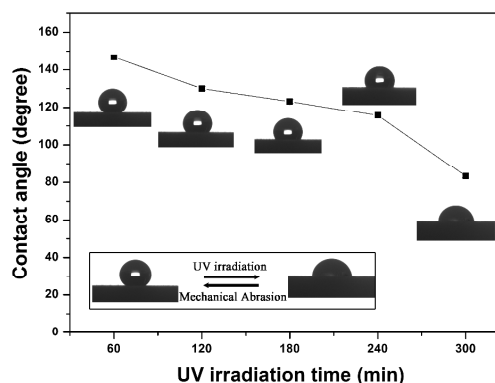


Fig. 5 Variation of water contact angle of bulk material as a function of UV irradiation time (inset is the reversible transition between superhydrophobic and hydrophilic states).

To thoroughly understand the superhydrophobicity to hydrophilicity transition of the bulk material under UV irradiation, the surface compositions were examined by XPS. In fact, the mechanism for superhydrophobicity to hydrophilicity transition on transition-metal oxides has been reported previously.^{30–31} As reported, under UV irradiation, electron-hole pairs would be generated in the valence

and conduction bands of TiO_2 , which could react with the absorbed H_2O and O_2 molecules. This would form peroxide intermediates that could further react with the TiO_2 surface to form Ti-O-H bonds.³² This mechanism is consistent with the observed significant increase in the O:Ti atomic ratio (Table 1, ESI†). Fig. 6 shows the Ti $2p_{3/2}$ XPS spectra of bulk material surface before and after UV irradiation. The Ti $2p_{3/2}$ peaks for TiO_2 can be deconvoluted into two components at 457.9 eV and 458.7 eV, corresponding to Ti-O and Ti-O-H respectively.³⁰ After UV irradiation, the ratio of $\text{Ti-O}/\text{Ti-O-H}$ bonding decreased from 1.2 to 0.7. The Ti-O-H groups would significantly enhance the hydrophilicity of the surface. As a result, the water CA of nanocomposite surface decreased.

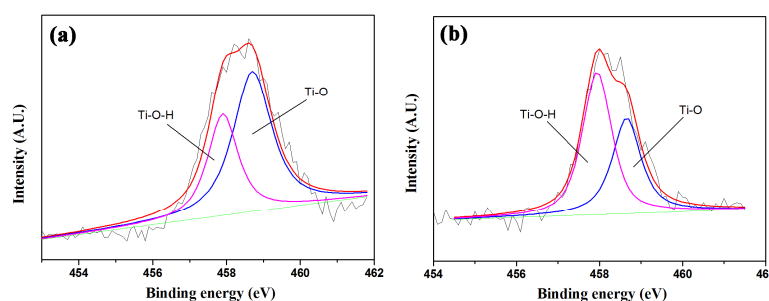


Fig. 6 Ti $2p_{3/2}$ XPS spectra of nanocomposite bulk material surface before (a) and after (b) UV irradiation.

In conclusion, a nanocomposite bulk material with superhydrophobic and superoleophilic properties was fabricated by a facile approach. The material retains its superhydrophobicity even after mechanical abrasion or oil fouling. Under UV irradiation, the surface wettability can be turned to hydrophilic, and a good reversibility of wettability is achieved through cycling between UV irradiation and removing the UV irradiated layer upon mechanical abrasion. It does not need any expensive fluorochemicals to realize the superhydrophobicity. In contrast to most superhydrophobic surfaces that have poor durability after damage by mechanical abrasion, the presented superhydrophobic surfaces still have high water repellency with low sliding angle. It is expected the bulk material with excellent water-repellence extending throughout its whole volume as a new concept in designing damage-tolerant superhydrophobic materials.

ACKNOWLEDGMENTS

This work was supported by the Joint Talent Cultivation Funds of NSFC-HN (U1304529), National Basic Research Program of China (973 program) (Grant No. 2013CB632303), National Natural Science Foundation of China (51075120), Program for Changjiang Scholars and Innovative Research Team in University (No. PCS IRT1126).

REFERENCES

- [1] Q. F. Xu, J. N. Wang and K. D. Sanderson, *J. Mater. Chem.*, **2010**, 20, 5961.
- [2] Y. C. Jung, B. Bhushan, *ACS NANO*, **2009**, 3, 4155.
- [3] T. Wang, X. G. Hu and S. J. Dong, *Chem. Commun.*, **2007**, 43, 1849.
- [4] X. Zhang, T. Geng, Y. G. Guo, Z. J. Zhang and P. Y. Zhang, *Chem. Eng. J.*, **2013**, 231, 414.
- [5] J. Li, L. Shi, Y. Chen, Y. B. Zhang, Z. G. Guo, B. L. Su and W. M. Liu, *J. Mater. Chem.*, **2012**, 22, 9774.
- [6] X. Gao, X. Yan, X. Yao, L. Xu, K. Zhang, J. Zhang, B. Yang and L. Jiang, *Adv. Mater.*, **2007**, 19, 2213.
- [7] L. Cao, A. Jones and V. Sikka, *J. Wu, Langmuir*, **2009**, 25, 12444.
- [8] M. Ruan, W. Li, B. S. Wang, B. W. Deng, F. M. Ma and Z. L. Yu, *Langmuir*, **2013**, 29, 8482.
- [9] Q. M. Pan, M. Wang, *ACS Appl. Mater. Interfaces*, **2009**, 1, 420.
- [10] Q. M. Pan, J. Liu and Q. Zhu, *ACS Appl. Mater. Interfaces*, **2010**, 2, 2026.
- [11] X. Zhang, Y. G. Guo, P. Y. Zhang, Z. Z. Zhang, Z. S. Wu, *ACS Appl. Mater. Interfaces*, **2012**, 4, 1742.
- [12] W. X. Liang, Z. G. Guo, *RSC Adv.*, **2013**, 3, 16469.
- [13] X. Y. Zhou, Z. Z. Zhang, X. H. Xu, F. Guo, X. T. Zhu, X. H. Men and B. Ge, *ACS Appl. Mater. Interfaces*, **2013**, 5, 7208.
- [14] X. T. Zhu, Z. Z. Zhang, G. N. Ren, J. Yang, K. Wang, X. H. Xu, X. H. Men and X. Y. Zhou, *J. Mater. Chem.*, **2012**, 22, 20146.
- [15] T. Verho, C. Bower, P. Andrew, S. Franssila, O. Ikkala and R. H. A. Ras, *Adv. Mater.*, **2011**, 23, 673.

- [16] P. Roach, N. J. Shirtcliffe and M. I. Newton, *Soft Matter*, **2008**, 4, 224.
- [17] S. Höhne, C. Blank, A. Mensch, M. Thieme, R. Frenzel, H. Worch, M. Müller and F. Simon, *Macromol. Chem. Phys.*, **2009**, 210, 1263.
- [18] H. Jin, X. L. Tian, O. Ikkala and R. H. A. Ras, *ACS Appl. Mater. Interfaces*, **2013**, 5, 485.
- [19] T. Verho, C. Bower, P. Andrew, S. Franssila, O. Ikkala and R. H. A. Ras, *Adv. Mater.*, **2011**, 23, 673.
- [20] X. T. Zhu, Z. Z. Zhang, X. H. Men, J. Yang, K. Wang, X. H. Xu and Q. J. Xue, *J. Mater. Chem.*, **2011**, 21, 15793.
- [21] C. H. Su, Y. Q. Xu, F. Gong, F. S. Wang and C. F. Li, *Soft Matter*, **2010**, 6, 6068.
- [22] I. A. Larmour, G. C. Saunders and S. E. J. Bell, *ACS Appl. Mater. Interfaces*, **2010**, 2, 2703.
- [23] Boinovich, L.; Emelyanenko, A. M.; Pashinin, A. S. *ACS Appl. Mater. Interfaces*, **2010**, 2, 1754.
- [24] Groll, J.; Ameringer, T.; Spartz, J. P.; Moeller, M. *Langmuir* **2005**, 21, 1991.
- [25] I. A. Larmour, S. E. J. Bell and G. C. Saunders, *Angew. Chem. Int. Ed.*, **2007**, 46, 1740.
- [26] X. Zhang, M. Jin, Z. Liu, D. A. Tryk, S. Nishimoto, T. Murakami and A. Fujishima, *J. Phys. Chem. C*, **2007**, 111, 14521.
- [27] X. Zhang, H. Kono, Z. Liu, S. Nishimoto, D. A. Tryk, T. Murakami, H. Sakai, M. Abe and A. Fujishima, *Chem. Commun.*, **2007**, 46, 4949.
- [28] X. F. Ding, S. X. Zhou, G. X. Gu and M. J. Wu, *Mater. Chem.*, **2011**, 21, 6161.
- [29] Y. Liu, Z. Y. Lin, W. Lin, K. S. Moon and C. P. Wong, *ACS Appl. Mater. Interfaces*, **2012**, 4, 3959.
- [30] W. X. Hou, Q. H. Wang, *Langmuir*, **2009**, 25, 6875.
- [31] Q. F. Xu, Y. Liu and F. J. Lin, *ACS Appl. Mater. Interfaces*, **2013**, 5, 8915.
- [32] A. Weninger, J. E. Davies, K. Sreenivas and N. S. R. Sodhi, *J. Vac. Sci. Technol.*, **1991**, 3, 1329.

Table of Contents Graphic

A novel damage-tolerant bulk material with superhydrophobic and superoleophilic properties is fabricated by a facile method.

