



Cite this: *Green Chem.*, 2024, **26**, 5601

# Shell waste valorization to chemicals: methods and progress

Lavanya Korampattu,<sup>a,b</sup> Neha Ghosh<sup>a,b</sup> and Paresh L. Dhepe<sup>a,b</sup> 

In light of growing energy and resource demands, the conversion of biomass materials into diverse chemicals and fuels holds significant importance. This process enables the utilization of biomass as a valuable and renewable resource to meet these escalating needs. The current biomass valorization processes are largely based on plant-derived lignocellulosic biomass materials. Studying new genres of biomass materials and their value addition is highly desirable, and they would complement and expand the existing biorefinery system. Crustacean shell waste represents a highly potential bioresource that is composed of a set of useful chemicals, among which chitin, the amino polysaccharide, has come to the fore as a promising material for a plethora of applications. In terms of the abundance of biopolymers on Earth, cellulose is the most prevalent biopolymer, and chitin ranks as the second. The presence of biologically fixed nitrogen in the structure of chitin opens up new possibilities for making useful chemicals, notably nitrogen-containing chemicals, which are otherwise impossible to produce directly from lignocellulosic biomass. In the last two decades, several attempts have been made by researchers in this area to convert chitin and its derivatives into valuable chemicals. This review comprehensively summarizes the transformation of the chitin fraction from shell waste to various chemicals through different thermo-catalytic processes and appraises the advancements in this area. The effect of various catalytic systems on chitin biomass valorization processes and the challenges and opportunities allied to this are discussed.

Received 29th December 2023,  
Accepted 15th March 2024

DOI: 10.1039/d3gc05177c

rscl.li/greenchem

## 1 Introduction

The excessive release of carbon dioxide (CO<sub>2</sub>) has emerged as a significant cause for concern due to its contribution to the

<sup>a</sup>Catalysis & Inorganic Chemistry Division, CSIR-National Chemical Laboratory, Pune-411008, Maharashtra, India. E-mail: lavanyakunni@gmail.com, nehaghosh.lbc@gmail.com, pl.dhepe@ncl.res.in

<sup>b</sup>Academy of Scientific and Innovative Research (AcSIR), Ghaziabad-201002, India



Lavanya Korampattu

Lavanya Korampattu was born in 1995 in Kerala, India. She received her Bachelor's degree in Chemistry from the University of Calicut and Master's in Chemistry from the Central University of Kerala, Kasargod. She is currently pursuing her Ph.D. in the Catalysis and Inorganic Chemistry Division at CSIR-National Chemical Laboratory, Pune, with Dr Paresh L. Dhepe. Her research focuses on the synthesis of biomass-derived carbon materials and exploring their applications in various organic transformations and electrochemistry.



Neha Ghosh

Neha Ghosh was born in 1991 in Ludhiana, Punjab. She received her Ph.D. in Chemistry at CSIR-National Chemical Laboratory, Pune, under the supervision of Dr Paresh L. Dhepe. Prior to this, she received her B.Sc. in Chemistry from the University of Calcutta and M.Sc. in Chemistry from the Indian Institute of Science Engineering and Technology, Shibpur (formerly BESU, Shibpur). Her research has been focused on understanding the physico-chemical properties of N-containing saccharides through various analytical techniques, their valorization using solid acid catalysts and analytical method developments for the separation and identification of products.

global warming phenomenon. The primary culprits behind this surge in CO<sub>2</sub> emissions are human activities involved in processing fossil fuel feedstocks to fulfil energy and material demands. Over the past two decades, this has prompted a notable shift in scientific focus towards exploring alternative energy sources and feedstocks. As per current scientific understanding, transitioning from conventional fuels to electricity can substantially mitigate emissions. However, despite progress in the energy sector, there is still a reliance on chemical processes to meet material needs. A potential solution lies in adopting renewable feedstocks, such as waste biomass. This approach not only aids in reducing our carbon footprint but also aligns with the imperative of fulfilling chemical requirements more sustainably.<sup>1,2</sup>

While plant-based biomass is primarily composed of carbon, hydrogen, and oxygen, animal biomass waste, such as shell waste, additionally contains nitrogen in the structure as a result of biological nitrogen fixation. This makes shell waste an appealing alternative feedstock to traditional nitrogen-containing chemicals, which rely heavily on the energy-intensive Haber process for ammonia synthesis. The current biomass utilization is largely focused on lignocellulosic biomass.<sup>3–5</sup> In contrast, much less attention is given to the valorization of animal-derived biomass. In this context the horizon of exploring new types of biomass resource will benefit the expanding horizon of biobased products and complement the current lignocellulose-based biorefinery system.

The FAO's 2022 report states that the annual production of crustaceans, including both aquaculture and capture fisheries, reached 17.2 million tons in 2020.<sup>6</sup> Most of it comprises crabs, shrimps, lobsters, and prawns. With the increase in the overall production of crustaceans, the shell waste management facilities also have to be improved. The disposal of the waste produced after shellfish processing represents a practical chal-

lenge, as in developing and poor countries, often the shellfish waste is discarded back into the ocean, dumped in landfill sites, burned, or left out to spoil, whereas in developed countries like the UK, the disposal cost for landfill sites is about £80.<sup>7</sup> Unregulated disposal can be a nuisance and polluting if not controlled. Shell waste contains several useful chemicals, such as chitin (an amino polysaccharide), protein, minerals like calcium carbonate, and pigments (the detailed composition is discussed in the next section). Hence, the valorization of shell waste by separating its components into different fractions, up-grading of each fraction, and converting them into useful chemicals can be a strategy for the management of shell waste.

The chitin fraction derived from shell waste constitutes a potent biopolymer, ranking as the second most abundant biopolymer in nature, following cellulose. Given its origin, chitin is both inexpensive and abundant, deriving from biomass, rendering it carbon-neutral and aligning well with the principles of the circular economy. Its natural nitrogen content further enhances its appeal as a feedstock. Considering the structural homology between chitin and cellulose, researchers have contemplated a parallel synthetic pathway for the production of value-added chemicals and platform compounds, particularly those featuring nitrogen moieties. Notably, several thermo-catalytic methodologies have been developed for the transformation of chitin biomass. These encompass the depolymerization, hydrolysis, hydrogenation, and oxidation of chitin and chito-oligosaccharides, yielding various nitrogen-containing and non-nitrogen-containing sugars, heterocyclic compounds, polyols, and acids *etc.* These methods serve the purpose of enhancing the value and utility of chitin-derived chemicals through systematic upgradation processes.


Chitin valorization to chemicals was in its budding stage in the initial years of the last decade. In recent times, there has been a discernible surge in interest surrounding the conversion of chitin, resulting in a substantial body of research and publications on the subject. Fig. 1 illustrates the increasing number of publications related to the thermo-catalytic trans-



**Paresh L. Dhepe**

*Paresh L. Dhepe has been Senior Principal Scientist at CSIR-National Chemical Laboratory, Pune, since 2020. He has worked at the CSIR-National Chemical Laboratory, Pune, since 2007. Prior to this, he completed his post-doctoral studies at Hokkaido University, Japan (2003–2007), with Prof. Atsushi Fukuoka. His Ph.D. is from Hokkaido University Japan (1999–2003). His research focuses on conversion of celluloses into sugars and furfural, valorization of lignin into aromatic monomers and their upgradation, synthesis of platform chemicals from sugars and sugar derivatives, and conversion of chitin-derived biomass into value-added chemicals. He is also working in the area of plastics circularity.*

*loses into sugars and furfural, valorization of lignin into aromatic monomers and their upgradation, synthesis of platform chemicals from sugars and sugar derivatives, and conversion of chitin-derived biomass into value-added chemicals. He is also working in the area of plastics circularity.*

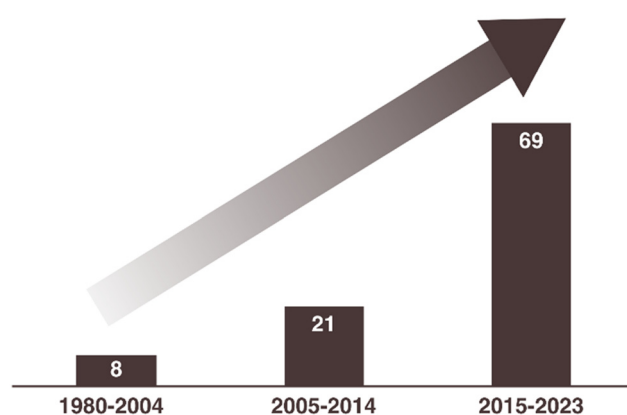

**Fig. 1** Number of publications on the transformation of chitin and chitin-derived chemicals.

formation of chitin biomass into various chemicals. This data compilation is derived from the literature results obtained through searches using specific keywords and their combinations, such as 'valorization of chitin and chitosan', 'depolymerization of chitin and chitosan', 'catalytic conversion of chitin biomass', 'value-added chemicals from chitin', 'transformation of chitin', and 'nitrogen compounds from chitin' in the SciFinder database.

The transformation of chitin into various chemicals and the aspects of shell biorefinery have been previously addressed in a limited number of earlier reviews and perspectives.<sup>8–19</sup> While a few reviews have provided detailed descriptions of various aspects of shell waste valorization and offered insights into the potential of chitin valorization, the majority of other reviews have focused on specific areas, such as the synthesis of one particular category of chemicals. Notably, a comprehensive compilation and discussion on recent advancements in catalytic transformations of chitin biomass is conspicuously absent in the existing literature. This gap in knowledge has motivated our exploration into the intricacies of the valorization of chitin from shell waste. The primary objective of this review is to scrutinize the diverse transformations of chitin leading to the production of valuable chemicals. Through an extensive examination of relevant literature, we present a categorization of chitin valorization methods based on the various products synthesized from chitin biomass. The review also delves into the discussion of the different catalytic systems employed and the distinct types of reaction process utilized in the conversion of chitin. In this review, our major focus is on the value addition of only the chitin fraction from shell waste. Given the abundance of detailed reviews on shell waste components<sup>10</sup> and fractionation methods,<sup>20</sup> we have included only a general and short description of other shell waste components and methods of shell waste fractionation for them in this review.

## 2 Shell waste components and uses

The exoskeleton of crustaceans such as crabs, shrimps, lobsters, krill, and prawns consist of mainly four components: the amino polysaccharide chitin (15–40%), protein (20–40%), minerals like calcium carbonate (20–50%), and lipids and pigments like astaxanthin (0–14%).<sup>21–23</sup> This composition is different and can vary from species to species, depending on the habitat, geographical area, and season as well. An illustration of shell waste composition and the area of application of each component is presented in Fig. 2.

Calcium carbonate is the major component of shell waste. It is also commonly found in rocks, shells of snails and mollusks, and eggs. It has three polymorphic forms in nature. The  $\beta$ ,  $\lambda$  and  $\mu$ -CaCO<sub>3</sub> forms are named calcite, aragonite, and vaterite, respectively.<sup>24</sup> CaCO<sub>3</sub> has a wide range of applications in industry. It is mainly used as a construction material in the building industry, and as an extender in the paint industry. Recent reports have highlighted the importance of shell waste-

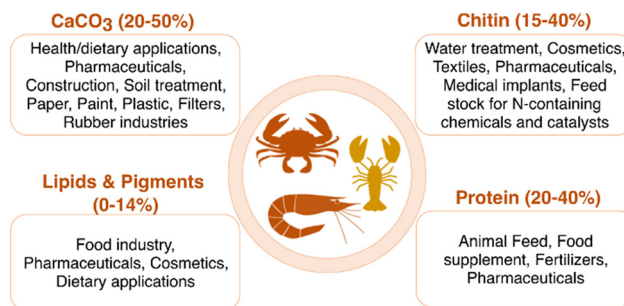


Fig. 2 Shell waste components and their applications.

derived CaCO<sub>3</sub> as a green additive to commercial cement.<sup>25,26</sup> In medicine, CaCO<sub>3</sub> is used for health and dietary applications such as gastric antacids, phosphate binders, *etc.* It also plays a vital role in soil treatment in the agricultural industry.<sup>24</sup> About 20–50% of shell waste is composed of CaCO<sub>3</sub>. This biological occurrence makes shell waste-derived calcium carbonate a reliable component in food and medicinal applications. The extraction of CaCO<sub>3</sub> to usable forms is discussed in some of the previous reports.<sup>27–29</sup> Briefly, shell waste undergoes washing with water to remove dirt, salt and remaining flesh, drying and calcination at 500 °C to 1000 °C to produce the CaCO<sub>3</sub> as the final powder.

Chitin is a nitrogen-containing polysaccharide that is the second major component of the shell waste of crabs, shrimp, prawns *etc.* It also occurs in the exoskeletons of arthropods and in certain fungal species. The annual global production of chitin exceeds 100 billion tons.<sup>30</sup> The principal source of chitin is shellfish waste, which constitutes about 15–40% of the shell waste. Shrimp-processing wastes contain around 14–27% chitin in terms of their dry weight, while crab-processing wastes contain approximately 13–15% chitin. Chitin acts as a protective component in the cell wall, where the chitin filaments are integrated into a mixture of calcium carbonate, phosphate, and protein, forming a matrix. This protein-based matrix undergoes a hardening process known as tanning.<sup>31</sup> Chemically, chitin is defined as a linear homopolymer of *N*-acetyl-D-glucosamine (NAG), or 2-(acetyl-amino)-2-deoxy-D-glucose linked *via*  $\beta$ -(1  $\rightarrow$  4) glycosidic bonds. The structure of chitin is very comparable to that of cellulose, where the hydroxyl groups at the C-2 position of the glucose units are replaced by an acetamido group. There are three different polymorphic forms of chitin, namely  $\alpha$ ,  $\beta$ , and  $\gamma$ -chitin; they vary in the packing and polarities of adjacent chains in successive layers.<sup>32</sup> The stacking configuration of different polymorphs of chitin is shown in Fig. 3a.

Thermodynamically,  $\alpha$ -chitin is the most stable form of chitin, with an antiparallel arrangement of polymeric chains with alternating sense. The parallel arrangement of chains with the same sense makes the  $\beta$ -chitin whereas  $\gamma$ -chitin has a both antiparallel and parallel stacking of chains, which was also considered as a variant of the  $\alpha$ -chitin family by recent studies. The conversion of  $\beta$ -chitin to  $\alpha$ -chitin is possible while

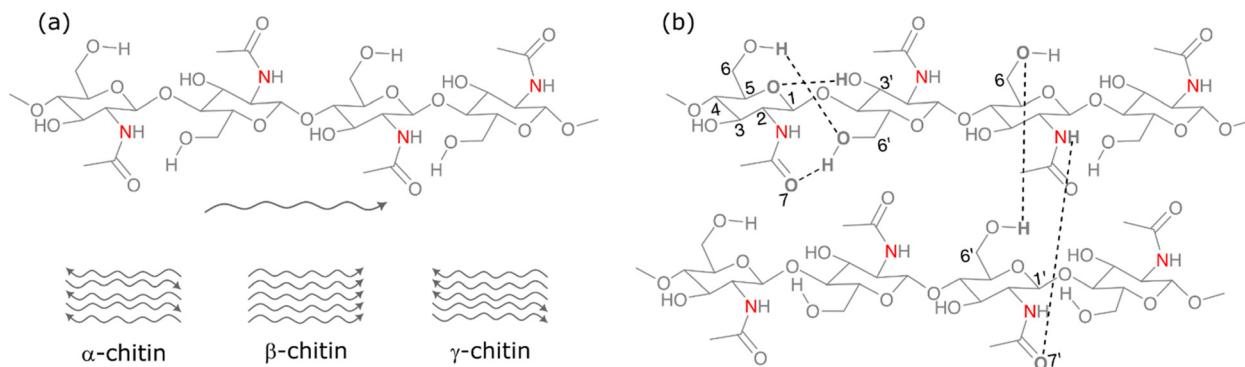


Fig. 3 (a) Stacking of polymer chains in different polymorphs of chitin and (b) intra- and inter-chain hydrogen bonding in chitin.

the reverse cannot be done. The crystallinity of  $\alpha$ -chitin is due to the presence of intra-chain (C3'-OH to O5, C6'-OH to acetamido carbonyl O7 and C6'-OH to O6') and interchain (between NH and the acetamido carbonyl O7' and C6'-OH to O6) hydrogen bonding between the polymeric chains of the chitin.<sup>33</sup> The intra- and inter-chain hydrogen bonding in chitin is shown in Fig. 3b.

$\alpha$ -Chitin is the most abundant among all of the chitin polymorphs, due to its thermodynamic stability, which makes it insoluble in most of the common solvents, consequently making it difficult to break into monomers and other chemicals. Chitin can undergo deacetylation of the acetamido group when treated with a base at elevated temperature to form chitosan, where an amino group is present instead of an acetamido group. The monomer unit of chitosan is D-glucosamine (GA) or 2-(amino)-2-deoxy-D-glucose. Chitosan can have a varying degree of deacetylation (DD) according to the deacetylation conditions. Chitin with more than 50% of DD is considered to be chitosan. The transformation of chitosan is easier since it is less crystalline and has reduced rigidity compared with chitin.<sup>34</sup> Chitin and chitosan contain nitrogen along with carbon, hydrogen, and oxygen in their structure which makes them an excellent resource to produce various valuable chemicals. The attractive aspect of chitin valorization lies in its ability to produce nitrogen-containing chemicals, which are particularly valuable compared with those derived from its cellulose counterparts. Moreover, the production of N-containing chemicals requires ammonia or ammonia derivatives, and it is typically a laborious and energy intensive process. The Haber-Bosch process for ammonia synthesis requires high temperature and high pressure, and the hydrogen supply for the process is mainly from the reforming of fossil fuel. Hence, chitin can be a potential resource which is inexpensive and sustainable to produce nitrogen-containing chemicals. Section 4 provides a detailed discussion on the application of chitin as a feedstock and its valorization process.

Apart from the fact that chitin is a sustainable feedstock material, in its native form chitin has got so many interesting properties. The biological properties of both chitin and chito-

san such as antibacterial, antioxidative, biocompatibility, biodegradability, *etc.* have made both chitin and chitosan versatile materials for a variety of applications in the biomedical,<sup>35</sup> pharmaceutical,<sup>36</sup> and food processing<sup>37</sup> fields *etc.* The advantageous feature of chitin's structure lies in its ease of transformation into diverse physical forms, including fibers, membranes, films, spheres, beads, mats, disks, and more. This inherent flexibility facilitates the creation of chitin-based materials for applications such as wastewater treatment<sup>38</sup> and innovative biomedical solutions like tissue engineering, drug delivery, and the fabrication of medical implants with notable effectiveness.<sup>39-42</sup> Chitin is thermally and chemically stable and it has an abundance of hydroxyl, primary amino, and acetylamino functional groups that can bind to a diverse range of metal ions. Notably, the occurrence of the amino group is uncommon in polysaccharides, and that makes the tuning and functionalization of chitin a feasible process. The chemically modified chitin in the form of various organo-catalysts and metal incorporated catalysts is explored and utilized in many reactions.<sup>13,43-46</sup>

In addition to fine chemicals, chitin is also used as a feedstock for biobased nitrogen-doped carbon.<sup>47</sup> This is a greener alternative to conventional nitrogen-doped carbon, as it reduces the use of expensive and toxic nitrogen sources like  $\text{NH}_3$ , amines such as urea, melamine, dicyanodiamine, DMF, ethylenediamine,  $\text{N}_2\text{H}_4$ , aniline,<sup>48-52</sup> or nitrogen-containing polymers, ionic liquids, and metal-organic frameworks (MOFs).<sup>53-55</sup> The synthesis procedure and utilization of these nitrogen-doped carbons as catalysts,<sup>56-58</sup> catalyst supports,<sup>59-61</sup> adsorbents<sup>61,62</sup> *etc.* are discussed in several earlier literature works. The majority of them are being utilized for electrochemical applications<sup>63-68</sup> and various organic transformations.<sup>58,59,69,70</sup> Readers are redirected to the references for further reading.

Minor fractions of proteins and lipids are also found in the shell waste. The protein hydrolyzate which is found in some shrimp shells can be used in applications such as animal feed, pharmaceuticals, human nutrition, and cosmetics.<sup>71</sup> The essential amino acid percentage in protein hydrolyzate determines the food protein nutritional value. Several species of



shrimp shells found to have proteins constituting amino acids glutamic acid, lysine, histidine, and valine which represent shell waste can be used as a nutritious protein source as animal feed and a food supplement.<sup>72</sup> Lipids are biomolecules which contain hydrocarbons and are vital building blocks for the structure and functioning of cells. Examples of lipids are fats, waxes, oils, hormones, certain vitamins, and cell membrane *etc.* The lipids in shrimp shells comprise fatty acids as the majority. These fatty acids are composed of 30–50% saturated and 50–70% unsaturated fats. Eicosanoic acid is the prevalent saturated fatty acid found in the shells of shrimps. Additionally, fatty acids such as docosahexaenoic acid and eicosapentaenoic acid are polyunsaturated, and can also be found in crustacean shells.<sup>9</sup> These lipids are used in cosmetics, food, and pharmaceutical applications.

Pigments like astaxanthin, astathin, lutein, canthaxanthin and  $\beta$ -carotene *etc.* are found in crustacean shells.<sup>73</sup> When the crustaceans are alive, they appear in different colors or even as transparent, as the pigments in their shells are bound to the protein. However, upon denaturation when the protein unfolds, the pigment is released. This is the reason for the transformation of seafood to a reddish hue when cooked. Astaxanthin has remarkable antioxidant activity, 10-fold higher than carotenoids and 500 times more advanced than vitamin E; hence, it is used as a dietary compound.<sup>74</sup> Since astaxanthin shows antioxidant, anti-immunomodulating, and anti-inflammatory effects it is widely used as a coloring agent in pharmaceuticals, food, and the cosmetics industry. The separation of lipids, proteins and pigments is mainly biochemical using enzymes and microorganisms and is briefly discussed in section 3.

### 3 Shell waste fractionation methods for the extraction of chitin

Fractionation protocols for shell waste have been developed primarily to extract chitin from discarded shells. Several methods exist for extracting chitin from shell waste (as shown in Fig. 4), in which the chemical extraction method is commonly employed industrially (Industrial method), whereas there are biological extraction procedures based on enzymes and microorganisms (Biological methods). Additionally, ionic liquid and deep eutectic solvent-based solvent extraction procedures have emerged recently (Solvent extraction methods).

#### 3.1 Industrial method

Industrially, chitin extraction from shell waste follows a well-established chemical method starting from demineralization followed by deproteinization, and decolouration steps.<sup>75</sup> The demineralization step is conducted after the drying and powdering of waste shells. Mineral acids like hydrochloric acid (HCl), sulphuric acid (H<sub>2</sub>SO<sub>4</sub>), nitric acid (HNO<sub>3</sub>) and even acetic acid or formic acid are used for demineralization. However, commonly, HCl is used for the treatment, in a concentration ranging from 0.2 to 2 N.<sup>30</sup> The time and tempera-

ture conditions for extracting chitin from shell waste can vary depending on the type of shells and the desired quality of the chitin. It usually takes a few hours to a couple of days, and the temperature can range from room temperature to around 100 °C. During the acid treatment, the calcium carbonate and other minerals are removed:  $(\text{CaCO}_3 + 2\text{HCl} \rightarrow \text{CaCl}_2 + \text{H}_2\text{O} + \text{CO}_2\uparrow)$ .

Deproteinization is typically performed by alkaline treatment using 0.1 to 2 M concentration of NaOH at temperatures of 50 to 100 °C.<sup>76</sup> Proteins and lipids are hydrolysed and removed from the shell waste in this step. The process of base treatment not only removes proteins but also causes the chitin to undergo hydrolysis, resulting in a decrease in its molecular weight and partial deacetylation. After the deproteinization process, residual NaOH is removed by repeated washing with water and oven dried to obtain the chitin. Sometimes, to remove the pigments and to get colorless chitin for commercial applications oxidative bleaching is carried out using H<sub>2</sub>O<sub>2</sub> or NaOCl. The depigmentation step can be carried out before the demineralization to extract valuable pigments like astaxanthin. Even though this method is widely used for commercial processes, the procedure is costly, destructive, and not environmentally friendly. Since it involves corrosive mineral acids and bases it requires corrosion-resistant equipment, and a huge amount of wastewater is generated from the neutralization process which causes extra treatment expenses. These factors account for the high price of chitin in the market. The need for a green and cost-effective method for shell fractionation resulted in many novel strategies, namely, solvent-extraction methods and bioprocessing methods.

#### 3.2 Biological method

Biological extraction of chitin involves the use of enzymes and microorganisms for the isolation of chitin. Biological methods for extracting chitin typically involve two processes: deproteinization using enzymes and microorganism-mediated fermentation. Proteolytic enzymes like proteases, which are found in plants, microbes, and animals, are used for deproteinization of shell waste.<sup>30</sup> These protease enzymes (*e.g.* pepsin, papain, trypsin, devolvase *etc.*) can remove proteins from shells with minimal depolymerization and deacetylation during the extraction of chitin.<sup>77</sup> Enzymatic deproteinization of shrimp shells after demineralization has yielded chitin and protein hydrolysate.<sup>76</sup> Deproteinization can be conducted later or before the demineralization using crude enzymes as well as pure enzymes. Crude proteases can be obtained from bacteria and fish viscera. Even though enzymatic methods offer high-quality products and remain an eco-friendly process, they are costly, and the overall efficiency is lower than that of chemical processes.<sup>78</sup> Around 5 to 10% of residual proteins are found associated with isolated chitin. Additional alkali treatment can carry out the purity enhancement of the isolated chitin fraction.

The fermentation method can be utilized effectively by introducing specific microbial strains and endogenous microbes for deproteinization instead of using high-cost

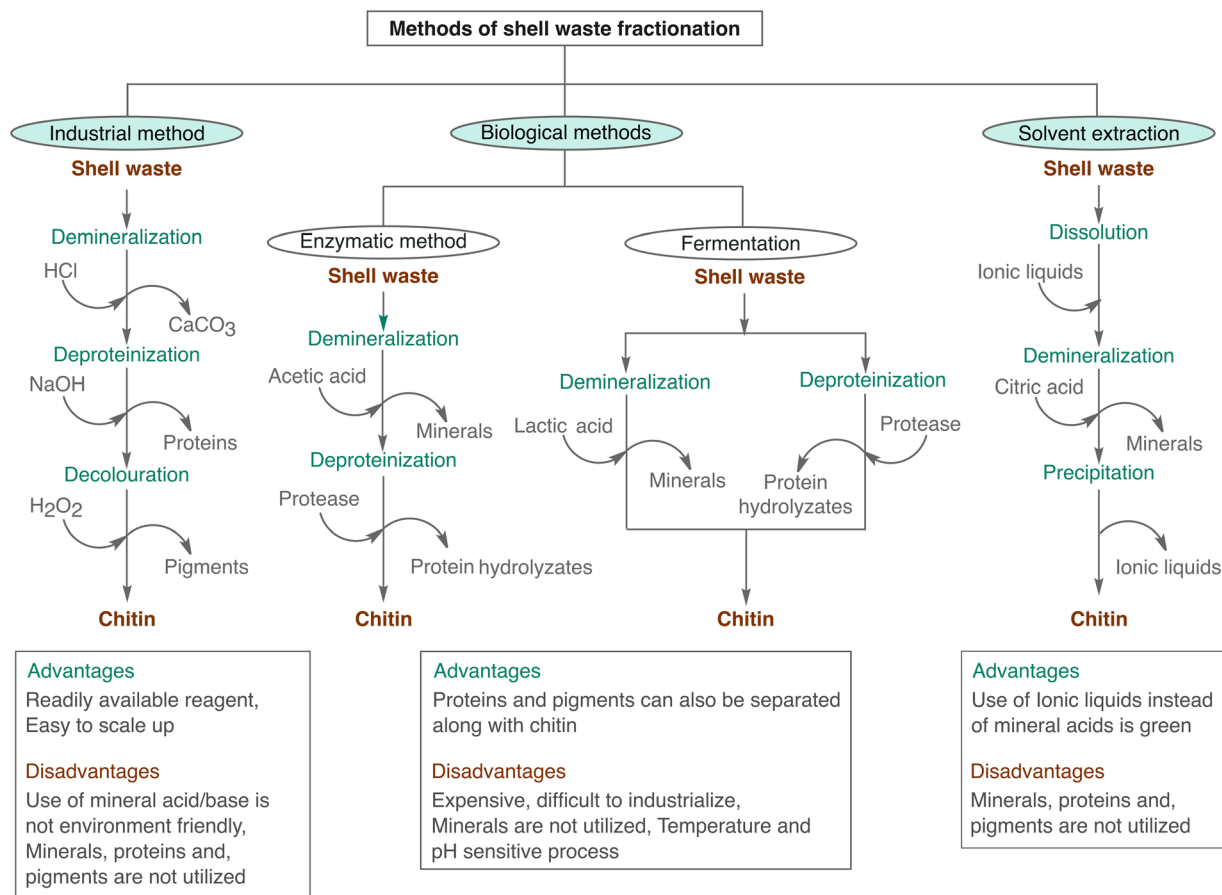


Fig. 4 Methods of shell waste fractionation.

enzymes.<sup>75</sup> The fermentation process combines the processes of deproteinization and demineralization into a single step. As a result of fermentation, a water-soluble liquor enriched with Ca<sup>2+</sup> and protein hydrolysates is produced, which can be utilized as a supplement in animal feed. It should be noted that the efficiency of deproteinization and demineralization of shrimp shells can vary substantially based on the specific types of microorganism employed and the conditions of fermentation.<sup>9</sup>

There are two types of fermentation process, lactic acid-mediated fermentation and non-lactic acid-mediated fermentation. Lactic acid fermentation of shell waste uses *Lactobacillus* sp. bacterial strains which are capable of producing proteases and lactic acid during the fermentation process.<sup>79</sup> Glucose is converted to lactic acid, which causes a lowering of the overall pH of the feed. This acidic environment helps to inhibit the development of harmful microorganisms. Several factors affect the efficiency of the lactic acid fermentation process. These include the amount and composition of the microbial inoculum, initial pH, change in pH throughout fermentation, concentration and source of carbon, duration, and temperature of fermentation.<sup>80</sup> In non-lactic acid-based fermentation processes, various fungi and bacterial species such as *Bacillus*, *Pseudomonas*, and *Aspergillus* etc. have been

employed. Among these, the protease-producing bacteria *Pseudomonas aeruginosa* demonstrated the highest deproteinization efficiency (74.8%) and demineralization efficiency (78.5%).<sup>81</sup>

### 3.3 Solvent extraction methods

Even though chitin cannot be solubilized in normal solvents, ionic liquids (ILs)<sup>82</sup> in the category of alkyl imidazolium halides or acetates or its acid functionalized derivatives and deep eutectic solvents (DES) (e.g., choline chloride-urea (CCU), choline chloride-thiourea and betaine hydrochloride-urea etc.) can dissolve chitin.<sup>83</sup> The literature extensively describes the dissolution of various biopolymers, such as cellulose, lignin, keratin, and others, in several ionic liquids. These studies provide detailed information on the capability of ionic liquids to effectively dissolve these biopolymers.<sup>84</sup> The strong interaction of anions in the ionic liquids with the hydroxyl group of the chitin helps to reduce the extent of hydrogen bonding in the structure and aids the dissolution of chitin. This dissolution ability of ILs has been utilized for the extraction of chitin in shell waste. The use of 1-ethyl-3-methylimidazolium acetate ([Emim]OAc) was reported for chitin extraction from shrimp shells. For 0.4 g shell waste with 10 g IL, loading under microwave heating for 2 minutes extracted chitin with high

purity and molecular weight.<sup>85</sup> Along with chitin, the dissolution of minerals and other components in the shell waste was also observed. Introducing a further step of demineralization by employing citric acid was found to be effective in reducing the mineral contamination in chitin extraction by ILs.<sup>86</sup> Recently *in situ* extraction of chitin was reported using 1-butyl-3-methylimidazolium hydrogen sulfate ([Bmim]HSO<sub>4</sub>) acidic ionic liquid. This [Bmim]HSO<sub>4</sub> acidic ionic liquid facilitates the extraction of chitin and effectively separates it from the protein–mineral matrix simultaneously. This innovative approach offers a more streamlined and efficient method for chitin extraction.<sup>87</sup> Acidic and natural DES systems have been found to be effective in the dissolution and extraction of superior quality chitin from raw shell waste effectively.<sup>88,89</sup> Extraction methods based on mechanochemistry where the solid-state milling of shell waste with solid acids is followed by aging are emerging as novel and sustainable methods nowadays.<sup>90</sup>

As we discussed earlier, the methods intended to extract chitin from shell waste involve demineralization using acids, in which minerals are often decomposed to carbon dioxide and metal oxide or metal hydroxides, which means that they cannot be used as is. Similarly, base-aided deproteinization causes the denaturation of proteins and they cannot be isolated successfully. Hence, the traditional chemical methods of shell waste fraction can recover only a single component of it. However, the simultaneous extraction of protein, chitin, minerals, and pigments is highly desirable.

Biological extraction methods using protease enzymes have been successful in recovering the protein part in the form of protein hydrolyzate along with the recovery of chitin, astaxanthin and minerals.<sup>91,92</sup> *Recombinant aspartic proteases P6281* (protease A) and *saccharopepsin* (protease B) showed high rates of deproteinization and could yield 40–71% of protein portions with an EAA (essential amino acid) content of 45–49%.<sup>91</sup> The extraction of minerals, particularly CaCO<sub>3</sub>, is highly desirable as they can serve as a reliable component in food and pharmaceutical applications because of their biological origin. The extraction of minerals from crustacean shell waste is not as popular as the mineral extraction from eggshells or the shells of mollusks. However similar methods can be adopted for mineral recovery from crustacean shell wastes. A typical method involves acid digestion of the shell waste followed by Na<sub>2</sub>CO<sub>3</sub> treatment to precipitate out the CaCO<sub>3</sub>.<sup>93</sup>

## 4 Conversion of chitin biomass to chemicals

Chitin, being the bearer of naturally occurring nitrogen in its structure along with carbon, hydrogen, and oxygen, holds the potential for the production of biobased chemicals. Chitosan, the deacetylated chitin derivative, is more suitable for chemical transformation since it has enhanced solubility and less crystallinity than chitin. Hence, both chitin and chitosan are considered as substrates for chemical transformations. There

are different classes of chemicals derived from the valorization of chitin and its derivatives. Examples of chitin biomass-derived chemicals explored so far are given in Fig. 5. As the monomers of chitin and chitosan are the amino-sugars, *viz.*, *N*-acetyl-D-glucosamine (NAG) and D-glucosamine (GA), they are the first set of products that can be made from chitin or chitosan. In further cascade reactions, they can be converted to different chemicals. For example, the hydrogenation of amino sugars leads to the formation of amino or amide polyols, and dehydration reactions lead to various nitrogen heterocycles and nitrogen-containing furan derivatives or even furan derivatives without nitrogen. Oxidation leads to the formation of amino acids as well as acids without nitrogen. The following sections provide a comprehensive discussion on each of these transformations.

### 4.1 Conversion of chitin to nitrogen-containing chemicals

**4.1.1 Conversion of chitin biomass to chito-oligomers and monomers.** The first step in the chemical conversion of chitin and chitosan is their depolymerization or hydrolysis into chito-oligomers or monomeric amino sugars (Scheme 1). Chito-oligomers and amino sugars, GA and NAG, are used in the biomedical,<sup>94</sup> pharmaceutical and food industries for various applications.<sup>95</sup> The depolymerization methods can be chemical, physical, enzymatic and combinations of any of these methods as well. Chemical methods include hydrolysis in the presence of acids and bases,<sup>96</sup> oxidative degradation using hydrogen peroxide<sup>97,98</sup> and ozone treatment<sup>99</sup> at elevated temperatures. Specific enzymes *viz.* chitinase, chitosanase and lysozyme and some non-specific enzymes like cellulose, protease, lipase, and pepsin are effective for enzymatic hydrolysis.<sup>100</sup> Physical methods like microwave,<sup>101</sup> ultrasound<sup>102,103</sup> and mechanical milling<sup>104</sup> techniques were also found to be useful along with chemical and enzymatic methods which can reduce the reaction time and increase the solubility of chitin by reducing its recalcitrant nature.

The acid-catalyzed hydrolysis of chitin and chitosan mostly involves the use of homogeneous acid catalysts like mineral acids in either water or ionic liquid media. The hydrolysis process for both chitin and chitosan comprises two important steps: the breakdown of the glycosidic bonds that link the NAG units and the deacetylation of the acetamido group within the NAG units. The rate of acid-catalyzed hydrolysis of the glycosidic linkage in chitin has been observed to be 2–3 times faster than that in chitosan.<sup>105,106</sup> The probable reason is that the acetamido group at C2 helps in stabilizing the oxo carbonium ion transition state and accelerates the cleavage of the glycosidic bond. Meanwhile the protonated amino group in the C2 position of the GA unit hinders the proton attack on the glycosidic oxygen atom. The use of HCl (6.0 wt%) promoted the hydrolysis of chitosan in 1-butyl-3-methylimidazolium chloride ([Bmim]Cl) ionic liquid media resulting in a mixture of total reducing sugars (TRS) with a total yield of 60% within 7 hours at 100 °C.<sup>107</sup> The H<sub>2</sub>SO<sub>4</sub>-catalysed liquefaction of chitin in ethylene glycol (EG) medium has been reported by the same group; at 165 °C within 90 minutes, 75%


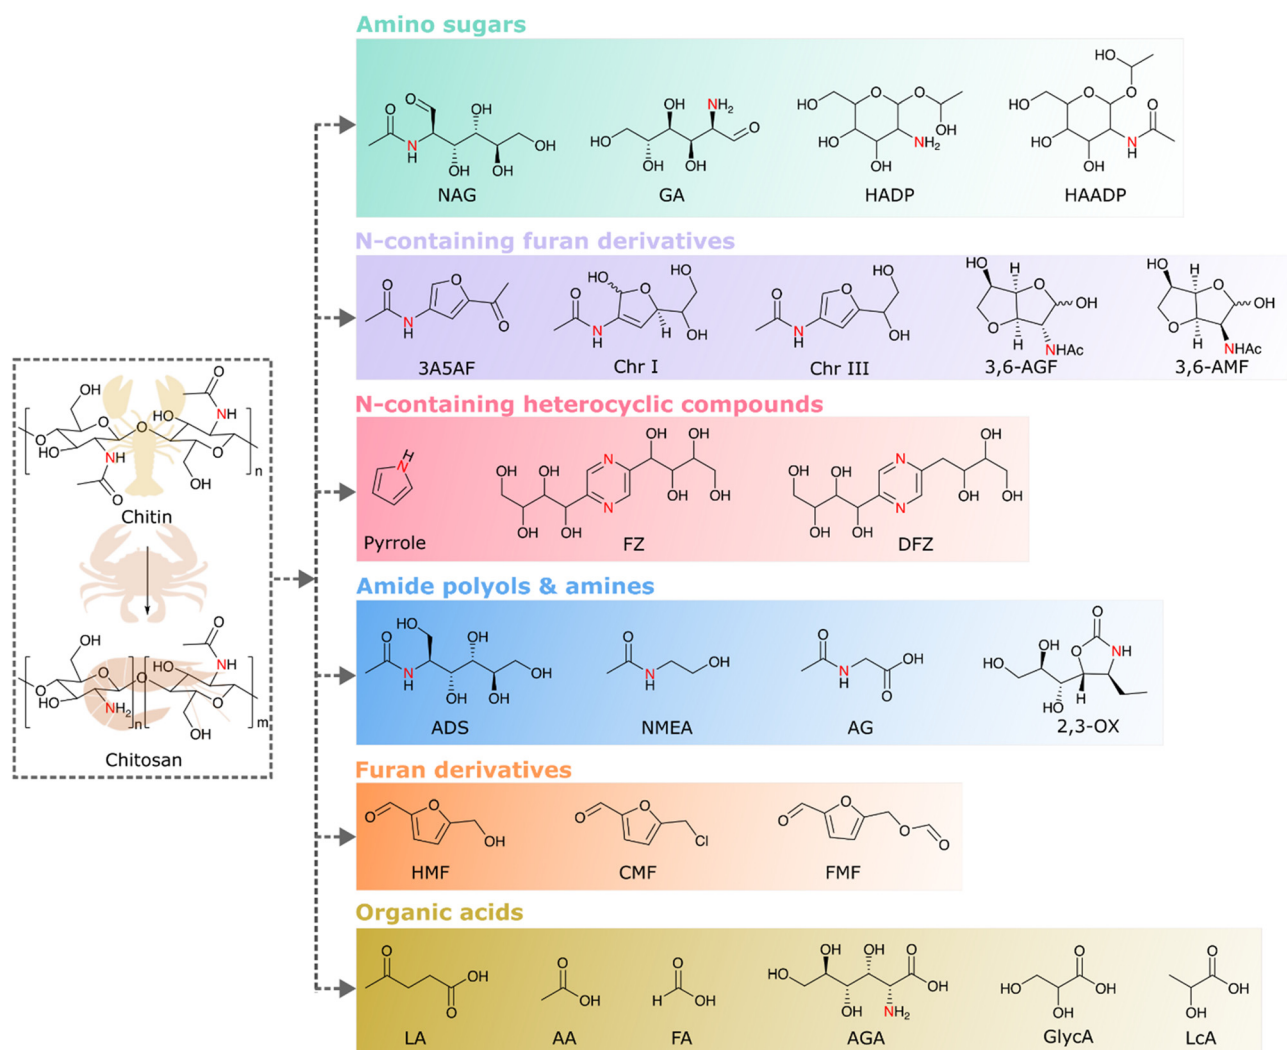


Fig. 5 Different classes of chemicals derived from chitin biomass valorization.

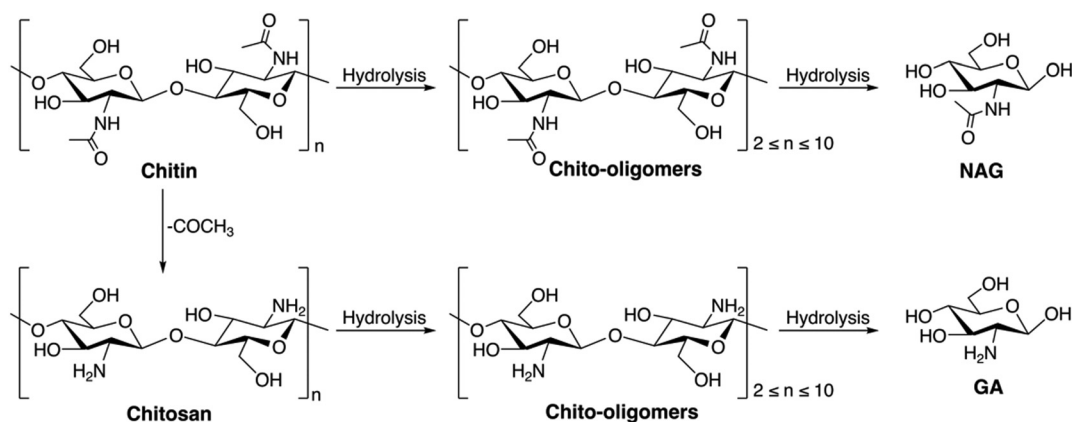

Scheme 1 Reaction pathway for chitin biomass hydrolysis to chito-oligomers and amino sugars.

of chitin was liquefied by using 8 wt% of acid. Hydroxyethyl-2-amino-2-deoxyhexopyranoside (HADP) and hydroxyethyl-2-acetamido-2-deoxyhexopyranoside (HAADP) were obtained as the major products in approximate yields of 30%.<sup>108</sup> In an attempt

to avoid the use of corrosive mineral acids, sulfonic acid functionalized imidazolium ILs have been used for the microwave-assisted hydrolysis of chitosan<sup>109</sup> where the IL 1-(3-sulfonic acid) propylpyridinium hydrogen sulfate ( $[\text{C}_3\text{SO}_3\text{Py}]\text{HSO}_4$ )



showed the best activity in DMSO because of its higher Brønsted acidity. The highest yield of 90% of TRS was obtained within 2 minutes at 640 W microwave power. Although these processes allow direct hydrolysis of chitin under mild reaction conditions, the use of strong mineral acids or other homogeneous alternatives is not desirable as they are corrosive and require a high post-processing cost.

In this context, the ball milling process has been successfully used to reduce the use of large amounts of mineral acids and ionic liquids, as mechanochemical forces can aid the hydrolysis process. Chitin depolymerization using a catalytic amount of  $\text{H}_2\text{SO}_4$  was reported by Kobayashi *et al.* Ball milling of acid-impregnated chitin under solvent-free conditions yielded soluble short-chain oligomers, and further hydrolysis and methanolysis of the ball-milled (BM) sample at 170 °C for 1 hour gave 53% of NAG and 1–70% of *O*-methyl-*N*-acetylglucosamine (MeNAG) yield.<sup>110</sup> Ning Yan *et al.* employed a similar strategy for the hydrolysis of chitin, where instead of a water medium, co-solvent systems were used. Various polar aprotic solvents were screened in which with a 4 : 1 diethylene glycol diethyl ether (DGDE)/water co-solvent system along with sulfuric acid, an 80% yield of glucosamine was achieved at 175 °C in 1 h from ball-milled chitin.<sup>111</sup> The depolymerization and functionalization of ball-milled chitin and chitin from shrimp shells were achieved during formic acid-mediated chitin liquefaction. The total yield of monomeric products obtained was 60% at 100 °C in 12 h.<sup>112</sup> Upon longer reaction times, the monomeric products underwent dehydration, resulting in the formation of 5-(formyloxymethyl)furfural (FMF) as the final product.

Another way to reduce the use of mineral acids was using lithium halide molten salt hydrate (MSH) systems due to their greater ability to disrupt the hydrogen bonding network of chitin.<sup>113</sup> The use of only 40 mM HCl along with 60 wt% LiBr AMSH resulted in the formation of 71.5% NAG at 120 °C in 30 min. The higher acidity of the catalyst, the higher nucleophilicity of  $\text{Br}^-$  anions and the interaction of  $\text{Li}^+$  cations with acetamide oxygen helps in breaking the glycosidic bonds without losing the acetamido groups and in turn increases the swelling and dissolution of the chitin. Other successful MSH systems constitute the use of 50%  $\text{CaCl}_2$  along with 1a 0%  $\text{ZnBr}_2$  mixture which resulted in a 67% yield of NAG at 120 °C in a 1 h reaction time. However, the chitin was aged in  $\text{H}_2\text{SO}_4$  in this case.<sup>114</sup>

In an attempt to completely get rid of mineral acids, the same group studied use of zeolites in the lithium halide salt hydrate-mediated hydrolysis of chitin.<sup>115</sup> Among various zeolites used, both commercial and synthesized SAPO-34 (CHA-type zeolite system) zeolite was found to be a suitable catalyst and gave an NAG yield up to 60%. The authors proposed that the  $\text{Li}^+$  ions exchange with  $\text{H}^+$  ions during the reaction and hence the hydrolysis reaction does not happen inside the pores of the catalyst and the released proton hydrolyzed the chitin dissolved in the LiBr molten salt hydrolysate. While the catalytic activity was not related to the zeolite morphology, the higher Brønsted acidity of the SAPO-34 had the key role to

play. Meanwhile, the low concentration of Lewis acid sites avoided the formation of undesirable side products.

Carbon-based solid catalysts possess higher stability compared with zeolite catalysts. A glucose-based carbon solid acid catalyst (GCSA) was employed for the hydrolysis of chitosan successfully, with a 98.1% yield of GA at 110 °C in 6 h. The presence of the amino groups in chitosan possesses challenges for solid acid catalysts as they can poison the acid sites. The authors overcame the problem by acidification of the chitosan amino group prior to the reaction. Along with higher activity the catalyst was found to be stable up to 6 catalytic cycles.<sup>116</sup> Recently Kobayashi *et al.* overcame the use of any mineral acids and solvents by employing the mechanochemical hydrolysis of chitin using air-oxidized carbon as a catalyst (AC-Air).<sup>117</sup> The weak acid sites induced by air oxidation of carbon in the form of carboxylic acid and hydroxyl groups were found to be responsible for the selective formation (94%) of chito-oligosaccharides. The solid carbon catalyst was able to hydrolyze chitin in a non-aqueous state and when compared with mineral acids and other solid acid catalysts, the selectivity of oligomers was higher in case of carbon catalyst.

Even though acid-catalyzed depolymerization is most favorable for chitin, the base-catalyzed depolymerization of chitin and chitosan has also been explored. Chebotok and co-workers studied the effects of bases on the depolymerization of chitin and chitosan.<sup>118</sup> The hydrolysis was performed in various conditions such as in solutions of NaOH, KOH, NaCl, NaI, and KI, and also in air, under  $\text{O}_2$ , and under  $\text{N}_2$ . It was observed that the changes in molecular weight of chitin during its hydrolysis were essentially similar. It was found that neither hydroxide ions nor oxygen initiates the cleavage of the glycosidic bonds, but the excess water present in the system is playing this role. The  $\text{H}^+$  ions formed by the dissociation of water (even trace amounts) caused the formation of carbenium ions which act as electrophiles in the reaction. Yan *et al.* studied the base-catalyzed mechano-chemical conversion of chitin and raw shrimp shell waste into low molecular weight chitosan.<sup>119</sup> Chitin was ball milled along with different bases such as NaOH, KOH, LiOH,  $\text{Ba}(\text{OH})_2$ , and  $\text{Ca}(\text{OH})_2$ . It was observed that both NaOH and LiOH are effective in depolymerization as since  $\text{Li}^+$  and  $\text{Na}^+$  are small, they can easily coordinate to the C1 and C4 oxygens. However, NaOH is more effective in doing both deacetylation and depolymerization. A certain base concentration is necessary, but higher amounts of base cause the absorption of water which hinders the mechanical process. The amount of base used does not significantly affect the conversion of chitin, but notable improvements in conversion have been observed by optimizing ball milling parameters such as the number of balls, mill-cycles, *etc.* Chitosan obtained from raw shell waste had more than 90% purity and this process enabled a degree of deacetylation and a molecular weight in the range of 40–83% and 1–13 kDa, respectively.

The overall analysis of the conversion of chitin/chitosan to monomeric products shows that conventional acid and base systems are not very selective in forming the monomers, and

**Table 1** Oligomers and amino sugar monomers from chitin biomass

Substrate	Catalyst	Reaction conditions			Product (% yield)	Ref.
		Solvent	Temperature (°C)	Time (h)		
Chitosan	HCl	[Bmim]Cl	100	7	TRS (60)	107
Chitin	H <sub>2</sub> SO <sub>4</sub>	EG	165	1.5	HADP + HAADP (30)	108
Chitosan	[C <sub>3</sub> SO <sub>3</sub> Py]HSO <sub>4</sub>	DMSO	640 W (MW <sup>a</sup> )	0.03	TRS (90)	109
Ball milled chitin	H <sub>2</sub> SO <sub>4</sub>	Water	170	1	NAG (53)	110
		Methanol	190	1	MeNAG (70)	
		DGDE/water (4 : 1 v/v)	175	1	GA (80)	111
Ball milled chitin	Formic acid	Formic acid	100	12	Monomeric products (60)	112
Chitin	LiBr + HCl	Water	120	0.5	NAG (71.5)	113
Acid aged chitin	CaCl <sub>2</sub>	Water	120	1	NAG (51)	114
	CaCl <sub>2</sub> + ZnBr <sub>2</sub>				NAG (66.8)	
Chitin	LiBr + SAPO-34	Water	130	2	NAG (61)	115
Chitosan	GCSA	HCl	110	6	GA (98.1)	116
Ball milled chitin	AC-Air	—	—	48	Oligomers (66) NAG (8.3)	117
Chitin	NaOH (50%)	Water	150	0.25	Chitosan (DD, 65%)	118
Ball milled chitin	NaOH	—	—	3	Chitosan (DD, 83%)	119

<sup>a</sup> MW: microwave heating.

moreover they often require extreme reaction conditions. At the same time the incorporation of ball milling or aging techniques was found to be very effective along with acid–base catalysts. The use of carbon-based catalysts results in an improved yield and selectivity for monomeric products. The combination of MSH and acid catalyst systems gives better yields of products. Further improvements in the process can be expected when heterogeneous catalyst systems are explored. The literature reports on the conversion of chitin biomass to chito-oligomers and amino sugars are tabulated in Table 1.


#### 4.1.2 Synthesis of N-containing furan derivatives

**4.1.2.1 Synthesis of 3-acetamido-5-acetylfuran (3A5AF).** The utilization of cellulosic biomass for producing furan derivatives such as HMF and furfural has been extensively researched. Similarly, researchers have investigated the chemical conversion of chitin and chitin-derived compounds like GA and NAG to obtain nitrogen-containing furan derivatives, which are more valuable substitutes compared with those derived from cellulose valorization. 3-Acetamido-5-acetylfuran (3A5AF) is the first reported N-containing furan compound from animal biomass sources. It was first obtained as a pyrolysis product of NAG with a yield of 2% along with 3-acetamidofuran (5%) and acetamidoacetaldehyde (3%).<sup>120</sup> Later in the thermal degradation of NAG at 200 °C various degradation products were obtained and 3A5AF was identified as the major compound, along with 2-acetylfuran, 3-acetamidofuran, pyrazine, pyridine, ethylpyrazine, methylpyrazine, 2-ethyl-6-methylpyrazine, 2,3-dimethylpyrazine, and acetamide.<sup>121</sup>

The use of imidazolium ILs for the conversion of glucose and fructose to HMF is known. Drover *et al.* were pioneers in reporting the chemical conversion of NAG to 3A5AF using ILs. The inherent acidity of imidazolium ionic liquids and the effect of chloride counter-anions aid the dehydration process. They achieved a 25.5% yield of 3A5AF by subjecting NAG to microwave heating at 180 °C for 3 minutes in the presence of [Bmim]Cl.<sup>122</sup> The freely bound chloride ions had a positive

effect on the reaction and the addition of NaCl could make only a 38.3% yield of 3A5AF. Meanwhile, the use of boric acid (H<sub>3</sub>BO<sub>3</sub>) as an additive at 180 °C increased the yield up to 60% during a 1 hour reaction. The Lewis acidity of the H<sub>3</sub>BO<sub>3</sub> along with the formation of a borate–hexose complex accelerated the dehydration process; however due to the presence of the *N*-acetyl group in NAG, higher amounts of the additive were required.<sup>122</sup> Furthermore, they tried the combination of NaCl and boric acid in a ratio 2 : 1 in the presence of dimethylacetamide (DMA) as the solvent under microwave heating at 220 °C for 15 minutes. The yield of 3A5AF could be maximized to 62% by using of 4 equivalents of NaCl.<sup>123</sup> The formation of 3A5AF directly from chitin was reported by Yan *et al.*, where they screened 6 organic solvents and 27 additives, including organic/inorganic acids, metal chlorides, bases, and heteropolyacids for the reaction. At 215 °C for 1 h, a 7.5% yield of 3A5AF was obtained with 50% chitin conversion by using *N*-methyl-2-pyrrolidone (NMP) as the solvent and H<sub>3</sub>BO<sub>3</sub>, LiCl and HCl as additives.<sup>124</sup> In addition to 3A5AF, several other products, including levoglucosenone, acetic acid, 4-(acetylamino)-1,3-benzenediol, and humins, were also identified in the reaction mixture, which offers insights into the reaction network. A mechanistic exploration through NMR studies highlights the formation of a boron complex intermediate, explaining boric acid's role. Kinetic analysis underscores the importance of disrupting hydrogen bonding in the chitin crystalline region for improved yields. A probable mechanism for the formation of 3A5AF from chitin is depicted in Scheme 2.

Subsequently, their research extended to the conversion of chitin and NAG to 3A5AF, involving the testing of 10 different ionic liquids (ILs) and 25 various additives. Replacing NMP with IL resulted in improved yields while lowering the required reaction temperature. In the presence of [Bmim]Cl, along with H<sub>3</sub>BO<sub>3</sub> and HCl as additives, they achieved a 6.2% product yield at 180 °C in just 1 hour.<sup>125</sup> This work emphasized the importance of using additives and mineral acids in combi-

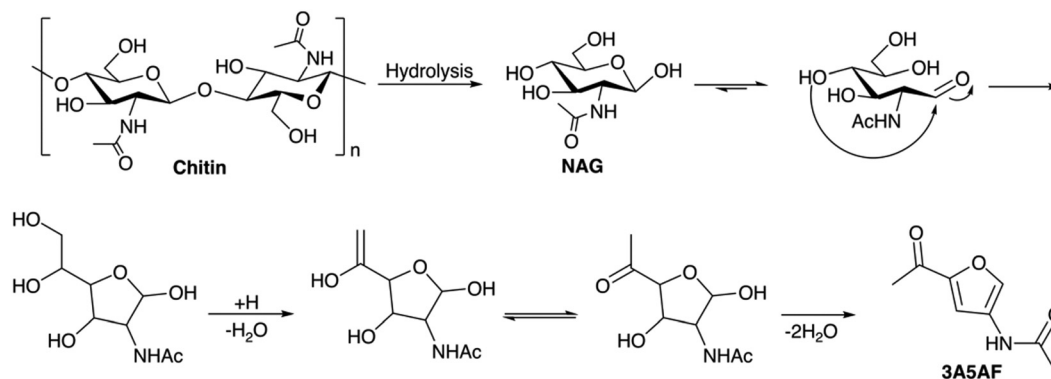

**Scheme 2** Plausible pathway for the formation of 3A5AF from chitin.

nation with ILs to enhance chitin conversion. The crystalline nature of chitin posed a challenge in its conversion, prompting the exploration of different pre-treatment methods, including ball milling, steam explosion, alkaline treatment, phosphoric acid treatment, and dissolution/precipitation using ionic liquids.<sup>126</sup> Ball milling in dry conditions was found to be effective in reducing the crystallinity and H-bonding in chitin; ball-milled chitin yielded 28% 3A5AF, when boric acid and HCl were used as additives and [Bmim]Cl as the solvent at 180 °C and 1 h reaction time.<sup>126</sup>

While ILs proved to be efficient in this transformation, their higher cost is a notable concern. Therefore, several efforts have been made to render them more cost-effective and tailored to specific tasks. Wang *et al.* studied the amino acid ionic liquid (AIL) catalyzed conversion of NAG to 3A5AF. Among them, glycine chloride ionic liquid, without any additive, yielded 43.2% 3A5AF in just 10 minutes at 200 °C. When CaCl<sub>2</sub> was introduced as an additive, the yield of 3A5AF increased to 52.6%, with improved conversion.<sup>127</sup> The AIL proved to be reusable, maintaining yields ranging from 43.22% to 36.59% over eight cycles. Zang *et al.* utilized pyridinium-based ionic liquids to produce 3A5AF from NAG. They achieved a 37.5% yield of 3A5AF with the 1-carboxymethyl pyridinium chloride ([CMPy]Cl) ionic liquid catalyst. This yield was further enhanced to 67.37% at 180 °C in 20 minutes by incorporating B<sub>2</sub>O<sub>3</sub> and CaCl<sub>2</sub> as additives. However, this system was applicable to chitin monomer only. Additionally, ethanolamine ionic liquids were employed for NAG conversion, resulting in a 62% yield using triethanolamine hydrochloride (TEA-HCl) at 170 °C within 20 minutes.<sup>128</sup> This catalyst proved to be recyclable for five reaction runs. In another study Zang and co-workers tried a series of quaternary ammonium ionic liquids for the conversion of NAG to 3A5AF. Using pyrazine hydrochloride ([Pyz]Cl) in combination with boric acid and CaCl<sub>2</sub> as additives in DMA at 190 °C for 60 minutes, they achieved a remarkable (69.5%) yield of 3A5AF.<sup>129</sup> The catalyst, [Pyz]Cl, exhibits strong acidity, and when heated, it ionizes to release protons, facilitating the hydrolysis of NAG. This aligns with the known impact of ionic liquid acidity on NAG degradation. The acidic nature of [Pyz]Cl

allows H<sup>+</sup> and Cl<sup>-</sup> ions to disrupt the original intramolecular hydrogen bonds in NAG, enhancing the degradation process. In contrast, substituted pyrazinyl ionic liquids show weaker degradation effects, with methyl-substituted ionic liquids exhibiting limited catalytic efficiency due to steric hindrance and hindered interaction with NAG. However, the catalytic activity of [Pyz]Cl was poor for the chitin degradation.

Deep eutectic solvents (DESs), similar to ionic liquids, have gained prominence for their eco-friendly nature. They are formed by mixing hydrogen-bond donors and acceptors, resulting in solutions with lower melting points than their components. DESs offer advantages like easy preparation, low toxicity, and cost-effectiveness. They prove to be effective as catalysts and solvents in biorefining processes for biomass and its derivatives.<sup>130,131</sup> Zhang and his team introduced an innovative method for converting NAG and chitin into 3A5AF using a DES based on choline chloride and citric acid (CCCA).<sup>132</sup> They explored a range of biobased DESs, incorporating choline chloride and various acids like citric, succinic, malonic, malic, and lactic acids, along with urea and glycerol. By introducing CaCl<sub>2</sub>·2H<sub>2</sub>O as an additive along with CCCA, they achieved a 47 mol% yield of 3A5AF from NAG at 210 °C in 20 minutes, with a 1:2 NAG to CCCA ratio. The addition of H<sub>3</sub>BO<sub>3</sub> also improved yields when used as a catalyst. The catalyst proved to be reusable for at least 5 cycles, maintaining a 30 mol% yield in the fifth cycle. Notably, the study also accomplished the direct conversion of chitin to 3A5AF using the same system, achieving a maximum yield of 5 mol% with chitin concentrations of 1 wt% at 210 °C in 120 minutes. Furthermore, they successfully isolated 99% pure 3A5AF from the crude product using a simple extraction followed by concentration, decolorization, crystallization, and drying processes.

Previously mentioned methods have commonly required high temperatures exceeding 180 °C, N-containing aprotic solvents, and chloride additives. However, Padovan *et al.* recently introduced an alternative approach involving the dehydration of NAG using AlCl<sub>3</sub>·6H<sub>2</sub>O and *N,N*-dimethylformamide (DMF) solvent at a notably lower temperature of 120 °C. This marks a significant reduction in the required temperature for NAG conversion *via* conventional heating.<sup>133</sup> They could achieve a 30%

yield of 3A5AF within 30 minutes and also presented a straightforward procedure for obtaining high-purity (98%) 3A5AF through column chromatography with an isolated yield of 18%. Zhang and Chen explored  $\text{NH}_4\text{Cl}$  as an economical catalyst for converting NAG to 3A5AF. In the presence of LiCl and DMF, they achieved a 43% product yield at 160 °C in 5 minutes.<sup>134</sup>  $\text{NH}_4\text{Cl}$  outperformed other chloride compounds tested as a catalyst. Notably, it surpassed a recent study using  $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ . The catalyst maintained 94% residual activity through five reaction runs. Scaling up the reaction to 200 mL demonstrated consistent results, and a purification protocol similar to that of Padovan *et al.* enabled the isolation of 99% pure 3A5AF with an isolated yield of 30%. Another study using  $\text{MgCl}_2 \cdot 6\text{H}_2\text{O}$  achieved a 41.6% yield of 3A5AF from NAG, at 180 °C in 1 hour with  $\text{B}_2\text{O}_3$  as an additive. They evaluated various N-containing polar aprotic solvents, with NMP demonstrating superior performance. Interestingly, under lower temperatures (120 °C),  $\text{MoCl}_5$  outperformed  $\text{MgCl}_2 \cdot 6\text{H}_2\text{O}$ .<sup>135</sup>

The analysis of the literature highlights the effectiveness of ionic liquids and Lewis acid catalysts in the formation of 3A5AF from NAG. However, these methods typically require higher temperatures and N-containing aprotic solvents. The use of chloride salts and boric acid as additives plays a pivotal role in the reaction. Direct conversion of chitin to 3A5AF remains challenging due to chitin's structural rigidity. Pretreatment methods like ball-milling have proved effective but necessitate the use of mineral acids. Addressing the commercial feasibility issue with expensive ILs, the utilization of bio-based ILs, deep eutectic solvents (DES), and cost-effective Lewis acids shows potential. However, N-containing solvents are often unavoidable. Hence, these studies underscore the need for a heterogeneous catalytic system together with suitable pretreatment methods for chitin conversion. It is significant to tune the catalyst's acidic properties to accommodate chitin's recalcitrant nature and preserve the amino groups

during conversion. The successful isolation and purification of 3A5AF on a lab scale holds promise for further valuable transformations into N-containing chemicals. Table 2 provides an overview of literature reports on the conversion of chitin and NAG to 3A5AF.

The potential of 3A5AF as an important organic compound and building block for the synthesis of other valuable chemicals has been explored by several groups. 3-Aminofuran is a molecule with unique substitution and its chemical transformations provide synthetic scope for novel heterocycles. Moreover, this is the only way of sustainably producing N-heterocycles. The hydrolysis of amido groups and reduction of acetyl groups in 3A5AF have resulted in 2-acetyl-4 aminofuran and 3-acetamido-5-(1-hydroxyethyl)furan.<sup>137</sup> Sperry *et al.* have studied the synthesis scopes for 3-amidofuran from 3A5AF by various ring and keto group functionalizations of 3A5AF.<sup>138</sup> Proximicins are excellent chemotherapeutic drug leads. Sperry and co-workers have attempted the synthesis of proximicin A, from chitin-derived 3A5AF. The synthetic steps were found to be greener and more sustainable than the conventional route.<sup>139</sup> The oxidative ring expansion of 3A5AF to 2-amino sugars like *N*-acetyl-L-rednose (RedNac) was reported with good yield and enantiopurity.<sup>140</sup> Deacetylation of RedNac gives L-rednose. Natural antibiotics such as anthracycline and angucyline contain L-rednose. The compound 3A5AF undergoes Pincatelli rearrangement, resulting in the formation of a 3-aminocyclopentenone. This 3-aminocyclopentenone can be easily transformed into diverse 4-aminocyclopentanones and 4-aminocyclopentene-1,3-diones. These compounds have significant utility in the synthesis of various nitrogen-containing heterocycles.<sup>141</sup> The reaction between 3A5AF and aliphatic ketones resulted in the formation of a dihydrodifurapyridine and it is an important heteroaromatic scaffold.<sup>142</sup> The chemical transformations of 3A5AF are schematically presented in Scheme 3.

**Table 2** Conversion of chitin and NAG to 3A5AF

Substrate	Catalyst	Reaction conditions			3A5AF (% yield)	Ref.
		Solvent	Temperature (°C)	Time (min)		
NAG	[Bmim]Cl	Water	180 (MW <sup>a</sup> )	3	25.5	122
NAG	$\text{H}_3\text{BO}_3 + \text{NaCl}$	DMA	220 (MW)	15	58	123
Chitin	$\text{H}_3\text{BO}_3 + \text{LiCl} + \text{HCl}$	NMP	215	60	7.5	124
Chitin (8 wt%)	[Bmim]Cl + $\text{H}_3\text{BO}_3 + \text{HCl}$	[Bmim]Cl	180	60	6.2	125
NAG	[Bmim]Cl + $\text{H}_3\text{BO}_3$	EtOAc	180 (MW <sup>a</sup> )	3	32	
NAG	[Bmim]HSO <sub>4</sub> + NaCl				19.7	
Ball milled chitin	$\text{H}_3\text{BO}_3 + \text{HCl}$	[Bmim]Cl	180	60	28	126
NAG	[Gly]Cl + $\text{CaCl}_2$	DMAc	200	10	52.6	127
NAG	TEA·HCl		170	20	62	128
NAG	[Pyz]Cl + $\text{B}_2\text{O}_3 + \text{CaCl}_2$	DMAc	190	60	69.5	129
NAG	CCCA + $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$	DMAc	210	20	47	132
Chitin (1 wt%)				120	5	
NAG	$\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$	DMF	120	30	30	133
NAG	$\text{NH}_4\text{Cl} + \text{LiCl}$	DMF	160	5	43	134
NAG	$\text{MgCl}_2 \cdot 6\text{H}_2\text{O} + \text{B}_2\text{O}_3$	NMP	180	60	41.6	135
NAG	[CMPy]Cl + $\text{B}_2\text{O}_3 + \text{CaCl}_2$	NMP	180	20	67.4	136


<sup>a</sup> MW: microwave heating.





High-temperature water was used as a dehydration medium for the conversion of NAG to chromogens, and is noteworthy for being non-catalytic and greener. This approach takes advantage of the higher ion product constant of water in the

An extended work on the non-catalytic conversion of NAG in high-temperature water by Osada, *et al.* has reported 37% and 34.5% of Chr I and III respectively at 180–280 °C and 250 bar in 5–34 seconds. 3A5AF was also obtained in less than 1% yield from the dehydration of Chr III.<sup>149</sup> The dehydration of Chr III proved to be challenging in the absence of a catalyst, resulting in the lower yield of 3A5AF. The effect of acidic and basic catalysts was studied under similar reaction conditions. Acid catalysts were found to suppress the formation of Chr I while promoting the dehydration of Chr I to Chr III. On the other hand, base catalysts exhibited a negative effect on the reactions. The same research group also explored the direct conversion of chitin to Chr I, using a similar approach. The reaction took place at higher temperatures, specifically

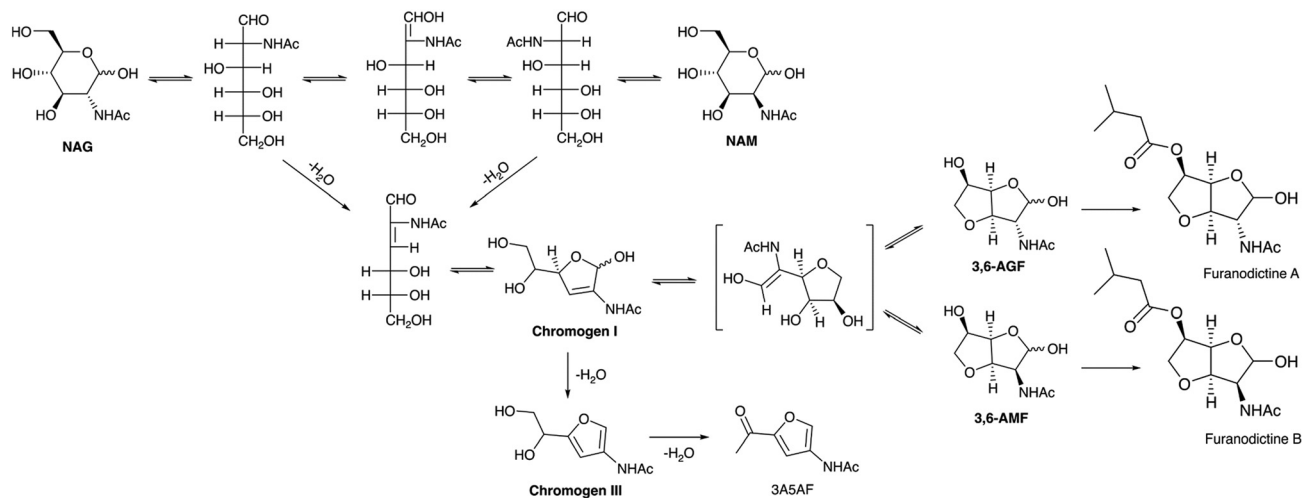

**Scheme 4** Probable reaction pathway for the formation of Chromogen I, Chromogen III, 3A5AF and 3,6-anhyrohexofuranoses form NAG.

between 290 and 390 °C, under a pressure of 250 bar, and over a longer duration of 180 minutes.<sup>150</sup> Despite their efforts, the yield of Chr I from chitin was only 2.6%, and the conversion of chitin to chromogens was found to be relatively insignificant. This observation suggests that the non-catalytic conversion of chitin and the associated dehydration reactions are sluggish processes.

In summary, chromogens and 3,6-anhydro sugars are rare *N*-furan derivatives derived from the conversion of chitin or NAG. So far, there are no reported catalytic systems for this conversion, apart from the non-catalytic systems, as mentioned earlier. The mechanism of NAG conversion to these products indicates that designing an effective catalyst poses a significant challenge, as excessive acidity can lead to the formation of 3A5AF or undesirable products. To successfully advance the application of these compounds, proper methods for separation and purification must be devised, especially for Chr I, in order to enable their further transformation into important molecules like furanodictines. A compilation of reports on 3,6-anhydrosugar and chromogen synthesis is given in Table 3.

**4.1.3 Other heterocyclic compounds from chitin and chitin derivatives.** Nitrogen-containing heterocyclic compounds are an essential part of many bioactive molecules. The formation of heterocycles was found during the pyrolysis of chitin with trivial yields. The direct transformation of chitin to

acetic acid and pyrrole was reported by Yan, *et al.*<sup>151</sup> where the reaction was carried out in the presence of copper oxide (CuO) catalyst and sodium hydroxide (NaOH) in the presence of oxygen at 250 to 325 °C. Even though acetic acid and other organic acids were the major products obtained, a few pyrazine and pyridine derivatives were also observed along with pyrrole (2% yield) in the nitrogen-containing product fraction. The use of an external ammonia source increased the pyrrole yield to 6% within a minute by using 1 M NaOH at 325 °C. The proposed reaction mechanism suggests that the dehydration of chitin monomer forms a furanic compound, which on O–N exchange followed by hydrolysis at the side chain led to the formation of pyrrole. When shrimp shell powder was directly used as the starting material, the major product obtained was acetic acid. The formation of pyrazine derivatives like fructosazine (FZ) or 2,5-bis(*D*-arabino-tetrahydroxybutyl)pyrazine and deoxyfructosazine (DFZ) or (2-(arabo-tetrahydroxybutyl)-5-(*erythro*-2,3,4-trihydroxybutyl)-pyrazine) were reported from GA. These compounds are used in therapeutic applications and the food industry as antimicrobial and flavoring agents.<sup>152</sup>

These compounds are naturally produced through the Maillard reaction involving reducing sugars and ammonia-containing compounds. Synthetic pathways for the formation of these compounds from monosaccharides (glucose/fructose) and polysaccharides (cellobiose/inulin) have been established, employing ammonium salts as catalysts in a weak acid

**Table 3** Synthesis of chromogens and anhydrosugars from NAG and chitin

Substrate	Reaction conditions				Product (% yield)	Ref.
	Solvent	Temperature (°C)	Time (s)	Pressure (bar)		
NAG	Borate buffer (pH 7)	100	2	—	3,6-AGF (10.2), 3,6-AMF (9.8)	145
NAG	High-temperature water	220	39	250	Chr I (23), Chr III (23.1)	147
NAG	High-temperature water	280	34	250	Chr I (37), Chr III (34.5)	149
Chitin	High-temperature water	390	3600	250	Chr I (2.6)	150


aqueous solution. However, these routes require additional nitrogen resources, which does not comply with green chemistry aspects.

There have been few efforts to make these compounds from GA condensation. In the presence of methanol and sodium methoxide at 70 °C, glucosamine hydrochloride (GA-HCl) and mannosamine hydrochloride (MA-HCl) were converted to FZ within 4 hours, yielding 24.8% and 39.4% respectively.<sup>153</sup> Candiano *et al.* tried GA condensation in the presence of lysine in water under simulated physiological conditions [100 mM lysine was incubated with 100 mM GA in phosphate buffer (0.02 M, pH 7.4) for 1 week at 37 °C in the dark] and the condensation product formed was FZ (70% yield).<sup>154</sup> This reaction represents the browning process of amino acids and proteins in systems that resemble human blood serum. It also serves as a fundamental tool for studying the circulating and structural proteins in diabetes mellitus and their browning and aging.<sup>154</sup> A unique method for producing DFZ was described, involving a condensation reaction of GA-HCl in the presence of phenylboronic acid and NaOH. Remarkably, this approach yielded a 96% of DFZ after 2 hours of reaction. Comparable results were achieved when using disodium tetraborate, sodium metaborate, or a solution of boric acid in NaOH.<sup>155</sup>

Ionic liquid aiding the conversion of GA-HCl was also studied by several groups. The self-condensation of GA-HCl catalysed by an ethanolic solution of a basic ionic liquid, 1-butyl-3-methylimidazolium hydroxide ([Bmim]OH), was reported. The IL was used as both catalyst and solvent, and a mixture of FZ and DFZ (49%) was obtained at 120 °C in 3 h in a DMSO-IL system.<sup>152</sup> Changing the IL to 1-ethyl-3-methylimidazolium acetate ([Emim]OAc) could give a total yield of 37% FZ and DFZ at 100 °C in 1.5 hours.<sup>156</sup> The effectiveness of these ionic liquids stemmed from their strong hydrogen bonding capabilities with amino and hydroxyl groups, facilitating the activation of GA and promoting the dehydration reaction to form the desired products. A detailed mechanism for the formation of FZ and DFZ from GA is presented in Scheme 5. The bifunctional nature of the IL has been antici-

pated in DFT calculations. It was found that the acidity of the cationic component within the IL plays a role in catalyzing the dehydration process, while the basic counter-anion assists in the dehydrogenation step. The formation of an intermediate dihydrofructosazine and the observation of a lower thermodynamic barrier for the formation of DFZ have been corroborated by both computational and experimental findings.<sup>157</sup> Furthermore, the impact of various additives on the condensation of GA into FZ and DFZ was investigated. 40.2% of DFZ was obtained *via* a dehydration process while using the boric acid as additive.<sup>158</sup> The dehydrogenation reaction was enhanced when the oxidizing agent used was H<sub>2</sub>O<sub>2</sub> and the major product was FZ (25.3%). Boron coordination helped in a ring-opening and successive dehydration reaction and was favored by both thermodynamic and kinetic factors. Dehydration of the intermediate dihydrofructosazine was fundamental in controlling the complete reaction. A choline chloride (ChCl) based deep eutectic solvent system was also employed for GA condensation as an alternative to ILs. Amino acids were used as cocatalysts, among which arginine was found to be most effective. 13.5% DFZ was obtained at 100 °C and 150 minutes in a choline chloride/urea system.<sup>159</sup> The use of arginine enhanced the yield to 30.1% while FZ was found only in traces. The hydrogen bonding interaction of arginine and the presence of the dihydrofructosazine intermediate was observed from *in situ* NMR studies, suggesting that the mechanism of formation of the products is similar in both cases.

The synthesis of heterocyclic compounds from chitin is a nascent field requiring in-depth exploration. Investigating the diverse synthetic possibilities for various heterocycles derived from chitin and characterizing them is essential. Compounds like FZ and DFZ hold significant value, and their sustainable synthesis from chitin biomass could be a viable avenue in biomass biorefinery. The use of basic ILs in polar aprotic solvents has demonstrated the ability to produce FZ and DFZ; however challenges remain in addressing their separation and purification. The elevated cost of ILs and concerns about the stability<sup>160</sup> of basic ILs add complexity. Separating these compounds from solvents like DMSO is problematic and possesses

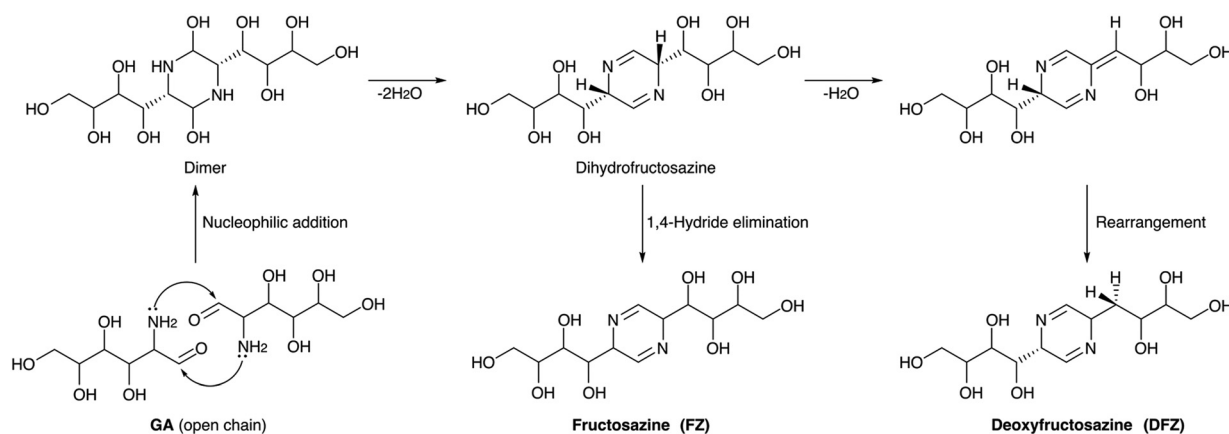

**Scheme 5** Mechanism of formation of FZ and DFZ from GA condensation.

risks in food industry applications. The use of bio-based DES shows promises due to their tunable properties, cost-effectiveness, and scalability. However, there is a need to explore novel heterogeneous catalytic systems, and effective methods for the separation and purification of these compounds must be developed. Detailed information on the formation of heterocyclic compounds from chitin biomass can be found in Table 4.

**4.1.4 Amide polyols and amines from chitin and chitin derivatives.** Metal catalysts facilitate the conversion of cellulose and glucose in the presence of hydrogen, forming a variety of polyols, including sorbitol, mannitol, ethylene glycol (EG), and propylene glycol (PG).<sup>161,162</sup> These polyols hold potential applications in the chemical industry, as they can be directly utilized in various industrial processes or serve as essential building blocks for the production of functional polymers, pharmaceuticals, and clean hydrogen fuel.<sup>163,164</sup> The hydrogenation of chitin and chitin monomers could form the amino sugar alcohols, similar to the cellulose and glucose hydrogenation products. These N-containing sugar derivatives such as amide polyols can be used for the synthesis of aromatic polyamides. CO<sub>2</sub> absorption of ethanolamine is an instance of another potential application.<sup>165</sup>

Yan *et al.* were the first to report the hydrogenation of NAG using noble metal-supported catalyst (Pt/C, Pd/C, Rh/C and Ru/C) in the presence of hydrogen.<sup>166</sup> Ru(1 mol%)/C was found to be effective in converting NAG to 8.7% N-acetylmonoethanolamine (NMEA) under conditions of 180 °C and 40 bar H<sub>2</sub> pressure within 1 hour. 6.1% of C4 polyols, and 71.9% of C6-nitrogen-containing polyols were also obtained. 2-Acetamido-2-deoxy-D-sorbitol (ADS) was the major product, and its selectivity was higher at lower temperatures. At high temperature a yield of C2–C4 polyols was increased due to the breaking of C6-polyols. NMEA and C4-polyols were formed in a single step *via* retro-aldol condensation and the use of NaOH enhanced the yields of the C2 and C4 products. According to the proposed mechanism, four parallel reaction pathways have been elucidated which involve the direct hydrogenation of NAG to ADS, NAG undergoing a retro-aldol reaction followed by hydrogenation to yield NMEA and C4-polyols, deacetylation of NAG to GA and its hydrogenation to form C6-

amino sugar alcohols without further breakage to smaller polyols and lastly the dehydration of NAG and its subsequent hydrogenation to form the partially oxygenated C6-amino sugar alcohol. The proposed reaction pathways are outlined in Scheme 6. The catalyst demonstrated recyclability for at least three cycles, with minimal Ru leaching observed at only ppb levels. Reactions using chitin and chitosan as substrates revealed that at elevated temperatures (260 °C), no C6 polyols were detected. Instead, 8% liquid products, including NMEA (from chitin), MEA (from chitosan), ethylene glycol (EG), and acetic acid (AA), were observed, along with 10% gaseous products, primarily methane and carbon dioxide. The generation of gaseous products was attributed to the exceptionally high reaction temperature.


Later Kobayashi and co-workers reported a hydrolytic hydrogenation procedure to obtain ADS directly from chitin.<sup>167</sup>

They ball-milled chitin with H<sub>2</sub>SO<sub>4</sub>, and the resulting chito-oligomeric mixture, along with acid, underwent one-pot hydrogenation using 5 wt% Ru/TiO<sub>2</sub> as the catalyst at 40 bar H<sub>2</sub> pressure. Rapid heating to 200 °C and rapid cooling led to a 25% ADS yield. Improved selectivity and yield were achieved by separating the hydrolysis and hydrogenation steps. The precise control of pH and temperature during hydrolysis (pH 2, 175 °C) and hydrogenation (pH 3–4, 120 °C) was crucial to prevent side reactions under acidic conditions and retro-aldol reactions under basic conditions caused by the Ru catalyst. In a two-step hydrolytic hydrogenation reaction with a maintained pH of 3–4, an overall hydrogenation selectivity of 85% and a 52% ADS yield were obtained. The study indicated ADS stability under the reaction conditions, suggesting that a high-temperature, low pH hydrogenation catalyst holds promise for the rapid and selective conversion of NAG to ADS. Their group also described a method to synthesize acetyl glycine (AG) and NMEA from NAG *via* oxidation and hydrogenation reactions.<sup>168</sup> Using 5 wt% Ru/C as the catalyst with NaHCO<sub>3</sub>, NAG underwent a base-catalyzed retro-aldol reaction, forming 2-acetamido-acetaldehyde and erythrose. Subsequently, 2-acetamido-acetaldehyde was hydrogenated to NMEA using the metal catalyst at 40 bar H<sub>2</sub> pressure and 120 °C in 1 hour, yielding 15% NMEA along with other products such as ADS, 2-acetamido-2-deoxymannitol (ADM), 2-acetamido-2,3-dideoxyhexitols, and

**Table 4** Formation of heterocyclic compounds from chitin biomass

Substrate	Catalyst	Reaction conditions			Product (% yield)	Ref.
		Solvent	Temperature (°C)	Time (min)		
Chitin	CuO	NaOH	325	35	Pyrrole (6)	151
GA·HCl	NaOMe	MeOH	70	240	FZ (24.8)	153
MA·HCl					FZ (39.4)	
GA	Lysine	Water	37	1 week	FZ (70)	154
GA	Phenylboronic acid + NaOH	Water		120	DFZ (96)	155
GA·HCl	[Bmim]OH ethanolic solution	[(Bmim)OH] + DMSO	120	180	FZ + DFZ (49)	152
GA	[Emim]OAc	DMSO	100	90	FZ + DFZ (37)	156
GA	[Emim]OAc + B(OH) <sub>3</sub>	DMSO	90	180	DFZ (40.2)	158
GA	[Emim]OAc + H <sub>2</sub> O <sub>2</sub>	DMSO	80	180	FZ (25.3)	
GA	ChCl-urea + arginine	ChCl-urea	100	150	FZ (30.1)	159



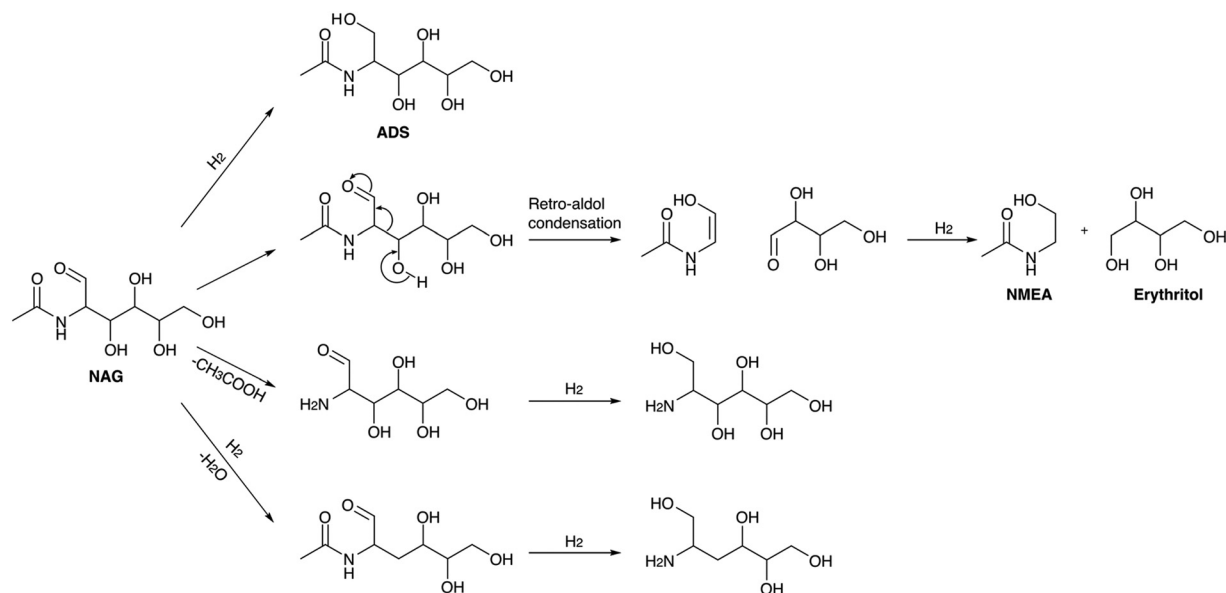

**Scheme 6** Reaction pathways for the formation of C4, C6 polyols and NMEA from NAG.

acetic acid. The oxidation of the OH group on the NMEA was achieved with the same catalyst in  $\text{NaHCO}_3$  solution under 10 bar  $\text{O}_2$  pressure at 120 °C for 1 hour, resulting in 21% AG under optimized conditions. The Ru/C catalyst, with Ru species present on the carbon as hydrous  $\text{RuO}_2$  with a hydroxo, aqua,  $\mu$ -hydroxo, and  $\mu$ -oxo ligand environment, facilitated the oxidation process.

The hydrolysis of NMEA yields ethanolamine (ETA), a versatile component used in  $\text{CO}_2$  sequestration, dermatological formulations, cleaning agents, and surfactants. Chowdhury *et al.* explored the hydrogenation of NAG to NMEA using a Ni (10 wt%)/ $\text{CeO}_2$  catalyst.<sup>169</sup> Among the various ceria supports (cubic/rod/polyhedral shaped) employed, cubic  $\text{CeO}_2$  demonstrated the highest activity under optimized conditions. With  $\text{NaHCO}_3$  as an additive, 42% NMEA was obtained at 120 °C in 8 hours and 40 bar  $\text{H}_2$  pressure. Two proposed pathways for NMEA formation involve the retro-aldol condensation of NAG to produce 2-acetamidoacetaldehyde and erythrose, followed by hydrogenation to NMEA over a Ni catalyst. Alternatively, NAG can undergo hydrogenation to ADS, and its subsequent hydrodeoxygenation with C–C cleavage leads to NMEA formation. Control experiments and intermediate compound detection confirm the reaction pathway involving the formation of ADS.

Amine synthesis is crucial for developing pharmaceuticals, materials, and agrochemicals, given the role of amines in biological molecules, drugs, polymers, and pesticides. Amine synthesis from NAG was reported by Lin and co-workers. They have carried out the deoxygenation of NAG using  $\text{H}_2$  and a Ru/C catalyst under acidic conditions.<sup>170</sup> The highest total amine yield (47.5 mol%) was achieved at 250 °C with 33 bar  $\text{H}_2$  in 2 hours, using a 4.45 molar ratio of  $\text{H}_3\text{PO}_4$  to NAG. The identified amine products included *n*-butylamine, pyrrolidine,

2-methylpyrrolidine, *n*-amylamine, 2,5-dimethylpyrrolidine, piperidine, 2-methylpiperidine, 3-methylpiperidine, and 1-ethylpiperidine, with cyclic amines prevailing. The hydrogenation environment with Ru/C likely led to the removal of oxygen atoms from the NAG as  $\text{H}_2\text{O}$  and/or  $\text{CO}/\text{CO}_2$ , generating methane as the primary by-product through the hydrogenation of CO. The *in situ* formation of acetic acid also resulted in the production of ethane. Additionally, various polyol-based side products were detected in the reaction.

Analogous to the conversion of sorbitol to isosorbide, ADS can be converted to 2-acetamido-2-deoxyisobutane. Unlike sugar compounds, ADS's solubility is better due to its sole hydroxyl group, and it could be a potential precursor of nitrogen-containing polymers. Kobayashi *et al.* converted chitin-derived amino sugar alcohol (ADS) to an isosorbide analogue (ADI). NAG to ADS conversion involved a hydrogenation reaction using Ru/C at 1 bar  $\text{H}_2$  and 150 °C for 3 hours.<sup>171</sup> ADS was then transformed into ADI through acid-catalyzed dehydration, utilizing trifluoromethanesulfonic acid ( $\text{CF}_3\text{SO}_3\text{H}$ ) under vacuum conditions.  $\text{CF}_3\text{SO}_3\text{H}$  ( $\text{pK}_a = -15$ ,  $\text{S/C} = 2$ ) produced the highest ADI yield (33%) under pressures less than 1 bar. Seeking an alternative to the corrosive  $\text{CF}_3\text{SO}_3\text{H}$ , they employed phosphorous acid ( $\text{H}_3\text{PO}_3$ ) for the ADS to ADI conversion through cyclization *via* phosphite ethers.<sup>172</sup> The optimal yield of ADI (25%) was achieved at 130 °C for 3 hours, with  $\text{H}_3\text{PO}_3$ 's reducing property aiding in reducing the humin formation. DFT calculations also supported the reaction proceeding through the formation of phosphite intermediates, lowering the activation energy compared with typical acid-catalyzed dehydration condensation reactions.

Kobayashi *et al.* explored another possible transformation of ADS. They studied the catalytic conversion of ADS to chiral oxazolidinones namely 4-(1,2,3,4-tetrahydroxybutyl)-1,3-oxazo-

lidin-2-one (1,2-OX) and 4-hydroxymethyl-5-(1,2,3-trihydroxypropyl)-1,3-oxazolidin-2-one (2,3-OX). The reaction was done in methanol and dimethyl carbonate (DMC) at 80 °C for 24 h using  $\text{KHCO}_3$  and it selectively formed 84% 2,3-OX (5(*S*)-isomer) which is a potential antibiotic agent.<sup>173</sup> DFT calculations revealed that the inner molecular hydrogen bonds in the transition states facilitated 2,3-OX formation by reducing the energy barrier. Interestingly, the direct conversion of NAG to oxazolidinones did not occur under the same conditions. The addition of  $\text{Na}_2\text{B}_4\text{O}_7$  slightly modified the reaction selectivity, increasing the yield of 1,2-OX threefold. Scheme 7 shows the possible transformation of chitin-derived ADS to ADI and oxazolidinones.


In summary, the hydrogenation of NAG presents a novel avenue for the synthesis of N-containing polyols and amines directly sourced from biomass. While ruthenium-based supported metal catalysts demonstrate superior performance, they all operate under a high hydrogen pressure. Directly hydrogenating chitin proves challenging due to the need for the precise tuning of hydrolysis and hydrogenation conditions to maximize the product yield, making single-step conversion difficult. Exploring low-cost metal catalysts is an alternative, but their selective transformation into specific products remains unexplored. The subsequent upgrading of products, such as ADS to ADI and oxazolidinones, shows potential, with further investigations needed to explore their potential transformations and application. The literature summary of conver-

sion of chitin and chitin-derived chemicals to amide polyols and amines has been listed in Table 5.

## 4.2 Conversion of chitin to non-nitrogen chemicals

### 4.2.1 Furan derivatives from chitin.

5-Hydroxymethylfurfural (HMF) stands out as a versatile platform chemical obtained through biomass valorization.<sup>174</sup> Its production from cellulosic biomass materials is widely recognized, and the feasibility of deriving HMF from chitin biomass has also been established. The acid catalysts typically played a catalytic role in the hydrolysis and dehydration reactions involved. Earlier methodologies primarily employed mineral acid catalysts such as HCl,  $\text{H}_2\text{SO}_4$ , and acetic acid to facilitate the conversion of chitin to furan derivatives such as HMF. Chitin was converted into 5-chloromethylfurfural (CMF) and levulinic acid (LA) in a biphasic system of HCl/dichloroethane (DCE) (1 : 2 v/v) at 150 °C in 3 hours, resulting in a yield of 45% for CMF and 29% for LA.<sup>175</sup> Cellulose exhibited a more favorable transformation, producing 85% CMF. This discrepancy underscored the inherent challenge associated with chitin conversion, attributed to its structural rigidity. Furthermore, CMF displayed facile conversion into HMF through hydrolysis. When subjected to reactions with ethanol and hydrogen, CMF yielded 5-(ethoxymethyl)furfural and 5-methylfurfural, respectively. In a separate HCl-catalyzed conversion of chitosan, microwave irradiation at 200 °C for 30 minutes resulted in a modest 2.2% HMF yield.<sup>176</sup> A low-

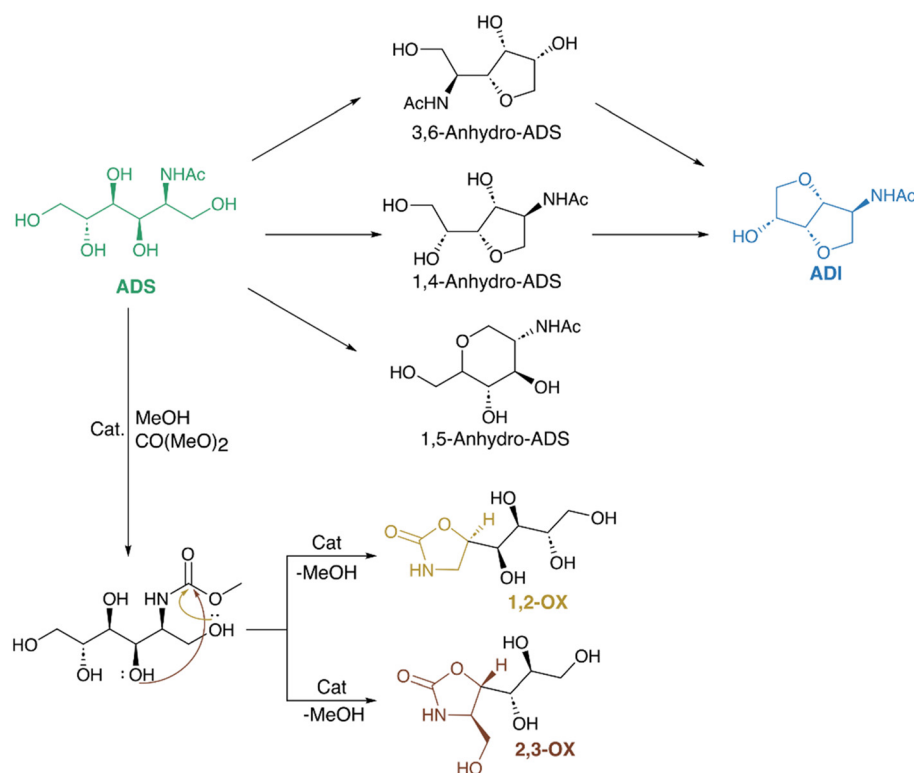

**Scheme 7** Possible transformation of chitin-derived ADS to ADI and oxazolidinones.

**Table 5** Conversion of chitin and chitin derivatives to amide polyols and amines

Substrate	Catalyst	Reaction conditions				Product (% yield)	Ref.
		Solvent	Temperature (°C)	Time (h)	Pressure (bar)		
NAG	Ru(1)/C	Water	180	1	H <sub>2</sub> (40)	C2–C4 polyol (6.1), C6-polyols with N (71.9), NMEA (8.7)	166
Chitin <sup>a</sup>	Ru(5)/TiO <sub>2</sub>	Water	175 <sup>b</sup> , 120 <sup>c</sup>	2	H <sub>2</sub> (40)	ADS (52)	167
NAG	Ru(5)/C + NaHCO <sub>3</sub>	Water	120	1	H <sub>2</sub> (40)	NMEA (15)	168
			120	1	O <sub>2</sub> (10)	AG (21)	
NAG	Ni(10)/CeO <sub>2</sub>	NaHCO <sub>3</sub>	120	8	H <sub>2</sub> (40)	NMEA (42)	169
NAG	Ru/C	H <sub>3</sub> PO <sub>4</sub>	250	2	H <sub>2</sub> (40)	Amines (47.5)	170
ADS	Ru/C + CF <sub>3</sub> SO <sub>3</sub> H	Water	150	3	H <sub>2</sub> (1)	ADI (33)	171
ADS	H <sub>3</sub> PO <sub>3</sub>		130	3	—	ADI (25)	172
ADS	KHCO <sub>3</sub>	MeOH + DMC	80	24	—	2,3-OX (84), 1,2-OX (6.9)	173

<sup>a</sup> Chitin ball milled with H<sub>2</sub>SO<sub>4</sub>. <sup>b</sup> Hydrolysis temperature. <sup>c</sup> Hydrogenation temperature.

temperature hydrothermal process involving dilute H<sub>2</sub>SO<sub>4</sub> at 174 °C for 36.9 minutes achieved a more substantial 12.1% HMF yield.<sup>177</sup> Notably, under similar conditions, glucosamine (GA) produced only a 1.8% HMF yield in 5 minutes. Levulinic acid (LA), a recurring byproduct of HMF synthesis, was commonly observed in conjunction with HMF formation. Ultrasound-assisted chitosan degradation, utilizing a 0.5% (v/v) acetic acid solution, yielded 12.1% HMF.<sup>103</sup> Additionally, sonication of chitosan at 40 °C for 30 minutes resulted in a concentrated soluble fraction of chitosan.


The use of weak acids such as formic acid was also employed for the chitin conversion. During the liquefaction of chitin mediated by formic acid, the formation of 5-(formyloxy-methyl)furfural (FMF) was observed with a yield of up to 35% after an extended reaction time of 168 hours at 80 °C.<sup>112</sup> The hydroxyl group undergoes formylation, resulting in the formation of soluble polymeric products. These polymers subsequently undergo hydrolysis, leading to the generation of both monomeric products and rehydrated products. Examining GA conversion in the presence of 0.1 M methanesulfonic acid (MSA) at 160 °C for 40 minutes produced a 2.3% HMF yield, accompanied by LA and formic acid (FA).<sup>178</sup> A parallel study on chitosan conversion with MSA at 200 °C for 15 minutes resulted in a more substantial 15% HMF yield,

employing 2% (w/w) chitosan and 0.2 M MSA as catalyst.<sup>179</sup> Mineral Brønsted acids, while providing ease of operation, often cause by-product formation and non-selective transformation, necessitate costly post-treatment, and their inherent corrosiveness that can contribute to reactor part corrosion. In light of these drawbacks, researchers have explored alternative acid catalysts, such as Lewis acidic catalysts including metal chlorides and ionic liquids, for chitin biomass conversion. Table 6 summarizes reports on the synthesis of HMF through mineral and organic acid catalyzed transformations of chitin biomass. Various metal chloride systems were utilized as catalysts, leveraging their Lewis acidity, in the conversion of chitin biomass. Hydrolysis of chitosan using SnCl<sub>4</sub>·5H<sub>2</sub>O at 200 °C for 30 minutes under microwave heating was found to produce HMF.<sup>176</sup> In this study, metal-containing catalysts were found to be effective among all those screened. Lower SnCl<sub>4</sub>·5H<sub>2</sub>O concentrations produced 10 wt% HMF, while higher concentrations yielded 21.6% LA in chitosan hydrolysis. Chitin hydrolysis under similar conditions resulted in 11.5–12.6% LA, and without catalysts or conventional heating, no HMF or LA formed. GA was treated in similar conditions to explain the mechanism of hydrolysis, and under optimised conditions 32 wt% of LA was obtained without HMF formation. The coordination of amino groups with a metal center or proton

**Table 6** Chitin biomass transformation to HMF using Brønsted acid catalysts

Substrate	Catalyst	Reaction conditions			Product (% yield)	Ref.
		Solvent	Temperature (°C)	Time (h)		
Chitin	HCl	DCE	150	3	CMF (45)	175
Chitosan	HCl	Water	200 (MW <sup>a</sup> )	0.5	HMF (2.2)	176
Chitosan	H <sub>2</sub> SO <sub>4</sub>	Water	174	0.6	HMF (12.1)	177
GA				0.08	HMF (1.8)	
Chitosan	CH <sub>3</sub> COOH	Water	40 (US <sup>b</sup> )	0.5	HMF (12.1)	103
Chitin	HCOOH	HCOOH	80	168	FMF (35)	112
GA	0.1 M MSA	Water	160	0.67	HMF (2.3)	178
Chitosan	0.2 M MSA	Water	200	0.25	HMF (15)	179

<sup>a</sup> MW: microwave heating. <sup>b</sup> US: ultrasound.

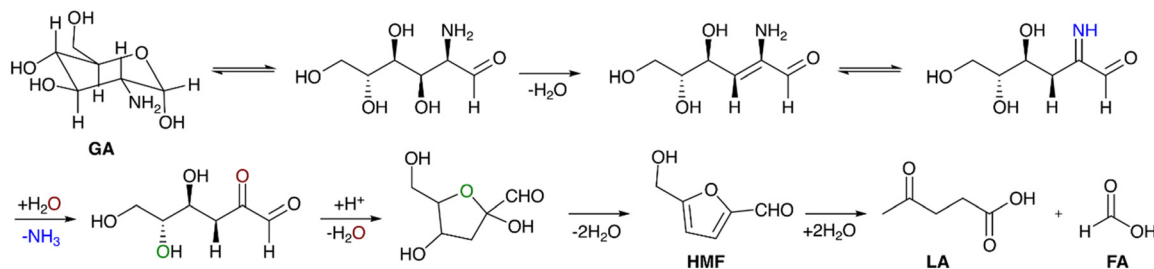

**Scheme 8** Mechanism for HMF and LA production from GA.

aided the cleavage of glycosidic bonds in the chitosan to yield glucosamine which on subsequent dehydration and deamination forms HMF.

Further rehydration by two molecules of water produces LA according to the proposed mechanism (Scheme 8).  $\text{SnCl}_4$  often forms  $\text{SnO}_2$  and  $\text{HCl}$  in aqueous solution. The reaction carried out using both  $\text{SnO}_2$  and  $\text{HCl}$  together produced 27.4 wt% LA from chitosan. They have also compared the effect of microwave heating by keeping the same reactions under conventional heating conditions. The formation of 12.08 wt% LA was found after 9 days of conventional heating whereas there was no HMF formation observed. In another work, a 67 wt% aqueous solution of  $\text{ZnCl}_2$  was found to catalyse the hydrolysis of chitosan, GA, and NAG to HMF.<sup>180</sup> At 120 °C in 90 minutes, 10.1% of HMF was formed from chitosan, and GA and NAG produced 21.6% and 2.8% of HMF respectively. The yield of HMF and conversion of substrate decreased with a decrease in the  $\text{ZnCl}_2$  concentration. Eight Lewis acidic metal chlorides were screened as cocatalysts, out of which  $\text{H}_3\text{BO}_3$  and  $\text{AlCl}_3$  were having promotional effects in HMF formation. The complex formation of  $\text{Zn}^{2+}$  with amino and hydroxyl groups weakened the polymeric backbone and eased the hydrolysis step to form the monomers. The zinc-monomer complex in pyranose form isomerises into open form and then back into cyclic furanose form unlike in the case of tin chloride catalyst, and further dehydration and deamination led to the formation of HMF. HMF formation from NAG was poor, because the presence of the amino group was essential for the HMF formation.

Zang *et al.* have screened 16 metal salts in a DMSO–water biphasic system for the hydrothermal conversion of chitin biomass.<sup>181</sup>  $\text{FeCl}_2 \cdot 4\text{H}_2\text{O}$  showed the best catalytic activity in the conversion of GA, NAG, chitosan, and chitin to HMF. The yield of HMF obtained was 24.5, 37.9 (at 180 °C in 5 h), 26.6, and 19.3 mol% (at 190 °C in 6 h) respectively from GA, NAG, chitosan, and chitin. In Lewis acid catalyzed reactions, it has been observed that the coordination of the  $\text{Cl}^-$  anions with  $-\text{NH}_2$  and  $-\text{OH}$  groups plays a key role in breaking the hydrogen bonding network present in chitosan and chitin. Also, metal cation interactions weaken the  $\beta$ -glycosidic bond and promote hydrolysis.

Sulfamic acid, also known as amidosulfonic acid, is considered a safer alternative to other strong acids like  $\text{HCl}$  or  $\text{H}_2\text{SO}_4$  in various applications due to its lower corrosivity and higher stability. It possesses several advantageous properties,

including being non-volatile, odorless, non-corrosive, moderately acidic ( $\text{p}K_a = 1.0$ ), non-hygroscopic, and cost-effective. The catalytic properties of sulfamic acid can be attributed to its inherent zwitterionic nature ( $\text{H}_3\text{N}^+\text{SO}_3^-$ ), which arises from its tautomeric structure.<sup>182</sup> Under the conditions of 200 °C and 2 minutes, the conversion of 3% (w/w) chitosan yielded 21.5% HMF in the presence of 0.7 M sulfamic acid.<sup>183</sup> This marks a notable improvement over previous studies, demonstrating higher HMF yields in a shorter time frame with sulfamic acid as the catalyst. In a related study by the same group, the conversion of GA to LA was explored. Interestingly, at lower sulfamic acid concentrations, the production of HMF was reduced. Specifically, using 0.3 M sulfamic acid at 200 °C for 15 minutes resulted in 0.14 mol% HMF and 33.76 mol% LA.<sup>182</sup>

Polyoxometalates (POMs) were another group of catalysts explored for HMF synthesis. They represent a versatile group of anionic metal–oxygen clusters that encompass a broad range of early transition metals. These clusters exhibit diverse chemical properties, including redox potential, acid–base properties, and solubility in both aqueous and organic media. Remarkably, the chemical characteristics of POMs can be readily and precisely adjusted across a wide range by intentionally manipulating their composition and structure. A microwave-assisted chitin conversion using polyoxometalate (POM) clusters as a catalyst was reported recently.<sup>184</sup> Using silicotungstic acid ( $\text{H}_4[\text{SiW}_{12}\text{O}_{40}]$ ), a 23.1% HMF yield was obtained at 200 °C within 3 minutes where the solvent system used was 67% DMSO–water. The chitin was first ball milled in the presence of  $\text{H}_2\text{SO}_4$ , which boosted the reduction in crystallinity and resulted in an improvement in the solubility of the chitin. Table 7 shows the literature reports on Lewis acid-catalyzed transformations of chitin biomass to HMF.

Heterogeneous catalysts offer advantages over homogeneous catalysts, primarily in terms of their potential for separation, recovery, and recyclability. Additionally, they tend to be environmentally friendly and do not corrode the reaction equipment. In the area of biomass conversion reactions, various solid acid–base catalysts have been explored. However, the conversion of chitin biomass to HMF using heterogeneous catalysts is a relatively unexplored area, with only a few recent studies addressing this aspect. Recently, H- $\beta$ -zeolite was used in combination with acetic acid, to produce HMF from chitosan by Dandekar *et al.*<sup>185</sup> Different catalysts were screened



**Table 7** Formation of HMF from chitin biomass using Lewis acid catalysts

Substrate	Catalyst	Reaction conditions			HMF (% yield)	Ref.
		Solvent	Temperature (°C)	Time (h)		
Chitosan	SnCl <sub>4</sub> ·5H <sub>2</sub> O	Water	200 (MW <sup>a</sup> )	0.5	10	176
Chitosan	ZnCl <sub>2</sub>	Water	120	1.5	10.1	180
NAG					2.8	
GA					21.6	
Chitin	FeCl <sub>2</sub> ·4H <sub>2</sub> O	DMSO	190	6	19.3	181
Chitosan			180	5	26.6	
NAG					37.9	
GA					24.5	
GA	0.3 M Sulfamic acid	Water	200	0.25	0.14	182
Chitosan	0.7 M Sulfamic acid	Water	200	0.03	21.5	183
Chitin (BM with H <sub>2</sub> SO <sub>4</sub> )	H <sub>4</sub> [SiW <sub>12</sub> O <sub>40</sub> ]	DMSO + water	200	0.05 (MW)	23.1	184

<sup>a</sup> MW: microwave heating.

where H-β-zeolite and Amberlyst-15 were found to have the best performance along with 10% acetic acid as additive. Under the optimized reaction conditions (180 °C and 60 minutes in the presence of a 5% catalyst concentration) chitosan with molecular weight 20 kDa, NAG, and GA·HCl yielded 25.16 ± 0.75%, 12.42 ± 0.25%, and 23.78 ± 0.15% of HMF. In this system, the Lewis acidity of the solid catalyst, coupled with the Brønsted acid sites (hydronium ions) from aqueous acetic acid, facilitates the rapid isomerization of the pyranose ring into furan and its subsequent hydrolysis. The addition of acetic acid, at a concentration of 10% v/v, enhances the surface coverage of the solid acid catalyst with the substrate and product. However, using acetic acid alone resulted in a poor yield of HMF. It was observed that higher acid loading resulted in the poisoning of the H-β-zeolite catalyst and the recovered catalyst gave only 7.43% of HMF.

Later Chung *et al.* reported HMF production from chitosan using Nafion®50 resin in a biphasic solvent system consisting of methyl isobutyl ketone (MIBK) and water (v/v = 2).<sup>186</sup> A 32.6 ± 4.2 mol% of reasonable yield of HMF was obtained as in the case of homogeneous acid systems at 180 °C in 2 h. The catalyst's efficacy in converting chitosan can be attributed to the interactions between the chitosan and the perfluorinated surface of the resin, coupled with its highly acidic characteristics. Unfortunately, the recyclability of the catalyst was not demonstrated. A notable challenge in this process involves the deactivation of catalytic sites (acid) due to the release of ammonia from the acetamido/amino group during the reaction. Hence the development of innovative heterogeneous cata-

lytic systems is crucial for efficient HMF production from chitin biomass. The literature studies on the formation of HMF using heterogeneous catalysts are summarized in Table 8.

Ionic liquids are organic salts characterized by a lower melting point (<100 °C) when compared with conventional inorganic salts. In contrast to traditional organic solvents, they possess minimal vapor pressure. Additionally, they demonstrate a broad liquid temperature range, conductivity, broad electrochemical window, and exceptional dissolving power for most organic, inorganic, and organometallic substances.<sup>187</sup> The various combinations of cation and anion enable the tuning of their properties desirable for task specific applications.<sup>188–190</sup> Over the last two decades, ionic liquids have played a crucial role as both solvents and catalysts in the dissolution and conversion of biomass.<sup>191,192</sup> Their extensive use extends to the transformation of lignocellulosic materials, such as cellulose, lignin,<sup>193</sup> and hemicellulose,<sup>194</sup> into essential platform chemicals. Researchers are actively exploring the use of ILs to depolymerize chitin, leveraging its structural similarity to cellulose. Various attempts have been made to convert chitin biomass specifically into HMF using ILs.

Zang *et al.* reported the conversion of chitosan to HMF under hydrothermal conditions using 5 wt% of 1-butyl-3-methylimidazolium hydrogen sulfate ([Bmim]HSO<sub>4</sub>) ionic liquid and AlCl<sub>3</sub>·6H<sub>2</sub>O (100 mol%) as co-catalyst. They could achieve 25.2 mol% of HMF in 5 h at 180 °C.<sup>195</sup> The catalysts were recyclable, and the activity was found to be constant for the first five cycles. Chitosan was converted into HMF using


**Table 8** Conversion of chitosan and chito-monomers to HMF using heterogeneous acid catalysts

Substrate	Catalyst	Reaction conditions			HMF (% yield)	Ref.
		Solvent	Temperature (°C)	Time (min)		
Chitosan	H-β-zeolite + CH <sub>3</sub> COOH	Water	180	60	25.2	185
NAG					12	
GA					23.8	
Chitosan	Nafion®50	MIBK + water	180	120	32.6	186

different acidic ionic liquids *via* a hydrothermal reaction by Zang and co-workers.<sup>196</sup> 4 wt% of *N*-methyl imidazolium hydrogen sulfate ([MIM]HSO<sub>4</sub>) aqueous solution at 180 °C in 5 h produced 29.5 mol% and 19.3 mol% of HMF from chitosan and chitin, respectively. Among the 9 ILs screened, [MIM]HSO<sub>4</sub> was found to be more efficient. The catalyst demonstrated recoverability through straightforward post-processing and remained recyclable for up to five runs. The IL anions' coordination with hydroxyl and amino groups played a crucial role in disrupting the hydrogen bonding, while the IL cations weakened glycosidic bonding, facilitating monomer formation. The anticipated mechanism involves isomerization, cyclization to furan form, and subsequent dehydration, ultimately leading to HMF formation. Scheme 9 illustrates the anticipated mechanism of HMF formation facilitated by IL. Later, a series of Lewis-Brønsted acidic ionic liquids were employed for the hydrothermal synthesis of HMF from chitosan.<sup>197</sup> A 1.25 wt% aqueous solution of the IL 1-hexyl-3-methylimidazolium hydrogen sulfate along with FeCl<sub>2</sub> ([Hmim][HSO<sub>4</sub>]-0.5FeCl<sub>2</sub>) produced 44.1% of HMF at 180 °C in 4 h. This IL system showed remarkable activity for the first four catalytic cycles. In the DMSO–water system, NAG was successfully converted to HMF through hydrothermal synthesis at 180 °C for 6 hours. Utilizing the [Hmim]HSO<sub>4</sub> ionic liquid, a notable 64.6 mol% yield of HMF was achieved.<sup>198</sup> Evaluation of various imidazo-

lium and thiazolium cation-based ILs revealed the essential role of the HSO<sub>4</sub><sup>−</sup> anion for higher HMF yields. Under similar conditions, GA, chitosan, and chitin produced 54.9, 34.7, and 25.7 mol% of HMF, respectively. The decreased accessibility of HSO<sub>4</sub><sup>−</sup> anions to chitosan and chitin resulted in lower HMF yields due to reduced polymer hydrolysis. The catalyst, along with the DMSO, was recovered and reused for up to five catalytic cycles, demonstrating reasonable activity. Benzimidazole and NMP-based ionic liquids were also studied for chitosan degradation by the same group. The catalytic efficiency of the ionic liquid benzimidazolium chloride ([Hbim]Cl) was exceptional, yielding 30.8 mol% HMF in a water medium and 34.9 mol% in a 10% DMSO–water system. The addition of DMSO improved the solubility of the chitosan and minimized side-product formation. The catalyst demonstrated reusable capability for five cycles without compromising its effectiveness.

Table 9 presents a summary of studies on the IL-catalyzed conversion of chitin and its derivatives to HMF. Notably, acidic ionic liquids have demonstrated superior performance compared with conventional acid catalysts in terms of yield, conversion, catalyst recovery, and recyclability for HMF production from chitin biomass. The optimization of ionic liquid properties, either independently or along with co-catalysts, holds potential for enhancing catalytic activity. Future endeavors in

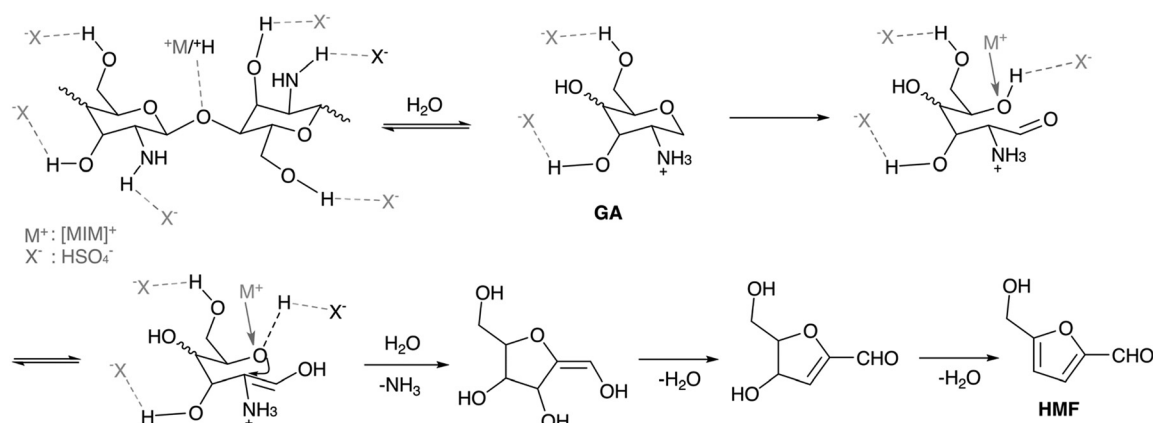

**Scheme 9** Proposed mechanism of IL-promoted conversion of chitosan to HMF.

**Table 9** Ionic liquid catalysed conversion of chitin and chitosan to HMF

Substrate	Catalyst	Reaction conditions			HMF (% yield)	Ref.
		Solvent	Temperature (°C)	Time (h)		
Chitosan	[BMIM][HSO <sub>4</sub> ] + AlCl <sub>3</sub> ·6H <sub>2</sub> O	Water	180	5	25.2	195
Chitosan	[MIM]HSO <sub>4</sub>	Water	180	5	19.3	196
Chitosan	[Hmim][HSO <sub>4</sub> ]-0.5FeCl <sub>2</sub>	Water	180	4	44.1	197
Chitin	[Hmim]HSO <sub>4</sub>	Water + DMSO	180	6	25.7	198
Chitosan					34.7	
NAG					64.6	
GA					54.9	
Chitosan	[Hbim]Cl	Water + DMSO	180	3	34.9	199

this research area should focus on conducting reactions at lower temperatures, with attention given to the specific choice of reaction solvents due to concerns about IL and product separation.

**4.2.2 Organic acids from chitin biomass.** Levulinic acid or 4-oxopentanoic acid is a potent platform chemical, which is formed as a by-product in the conversion of C6-sugars to HMF.<sup>200</sup> HMF undergoes rehydration under elevated temperatures and acidic conditions to yield levulinic acid (LA) and formic acid (FA). The formation of LA is commonly observed alongside HMF in many reactions discussed in the preceding section. Similar to HMF synthesis, various acid catalysts, including mineral acids, organic acids, metal chlorides, ILs, and solid acid catalysts, are employed for the production of levulinic acid.

In the context of reports on mineral acid-catalyzed chitin conversion to LA, a microwave-assisted hydrothermal process using 2 M H<sub>2</sub>SO<sub>4</sub> at 190 °C for 30 minutes resulted in a yield of 37.8 mol% of LA.<sup>201</sup> Similarly, employing HCl under comparable conditions yielded 32.7 mol% of LA. This approach was extended to GA, NAG, and various chitosan samples, where 19.3 to 37 mol% of LA was observed with both HCl and H<sub>2</sub>SO<sub>4</sub> within 10 to 30 minutes. In a separate study, 4 wt% of H<sub>2</sub>SO<sub>4</sub> successfully converted GA into LA (25.3 wt%) at 188 °C in 49 minutes.<sup>202</sup> Methanesulfonic acid (MSA) is an environmentally benign and green catalyst. Even though it is a strong acid (pK<sub>a</sub> = −1.9), it is non-oxidizing, non-foaming, less corrosive and bio-degradable compared with other mineral acids. In a hydrothermal conversion of GA at 200 °C using 0.5 M MSA, 49.9% LA and 50.8% FA was formed in 30 min.<sup>178</sup> Under the same reaction conditions 28.2% of LA was formed from 2% chitosan when 0.2 M MSA was used.<sup>179</sup>

When Lewis acids such as SnCl<sub>4</sub>·5H<sub>2</sub>O were used in the hydrothermal conversion of chitosan at 200 °C under microwave irradiation, in 30 minutes 23.9% LA was formed and the conversion of chitin produced 11.5% LA.<sup>176</sup> The poor yield of LA from chitin polymer is due to its structural rigidity, intensive network of hydrogen bonding and crystallinity. A very low yield of LA (0.48%) was obtained in a 0.7 M sulfamic acid catalysed hydrothermal degradation of chitosan at 200 °C within 2 min.<sup>183</sup> At the same temperature the 0.3 M sulfamic acid catalysed hydrolysis of GA yielded 33.76 mol% of LA within 15 min. 39.03 mol% FA and 26.48 wt% humins (insoluble products) were also detected.<sup>182</sup> Zirconium oxychloride (ZrOCl<sub>2</sub>) was able to catalyse the hydrothermal degradation of chitosan. At 200 °C and 20 min 21.3 mol% of LA was obtained from 5 wt% chitosan using 15 mol% catalyst.<sup>203</sup> Solid acid Amberlyst-15 was able to transform GA into 36.9% LA at 180 °C in 60 minutes.<sup>204</sup>


Sulfonic acid-functionalized imidazolium ionic liquids were used for the transformation of chitosan to LA, and various anion combinations were tried by keeping the cation the same. Among them 1-methyl-3-(3-sulfopropyl)-imidazolium hydrogen sulphate ionic liquid ([C<sub>3</sub>SO<sub>3</sub>Hmim]HSO<sub>4</sub>) showed the best activity. At 170 °C and 5 h, 1 g of the catalyst was able to convert 250 mg of chitosan in water (4 g) to 49% LA.<sup>205</sup> The

presence of water played a pivotal role in the reaction, as the absence of water led to a decrease in LA yield and the formation of a significant amount of humins. Reducing the substrate amount to 50 mg increased the LA yield to 64%, indicating a dilution effect. The increased selectivity for LA was attributed to the highly acidic nature of the IL. According to the proposed mechanism, chitosan underwent quaternization and depolymerization, forming the glucosammonium salt. This salt then underwent dehydration and deamination to produce HMF. Subsequent rehydration resulted in the formation of LA. However, the catalytic activity of the IL decreased after two cycles due to a reduction in acidity caused by ammonia released during the reaction. The researchers quantified the amount of NH<sub>4</sub><sup>+</sup> ion in the reaction mixture using ion chromatography analysis. Remarkably, the catalyst was found to be reusable for up to five catalytic cycles when 1 equivalent of H<sub>2</sub>SO<sub>4</sub> was added after recovery.

Liu *et al.* have recently reported the direct conversion of chitin to LA using the acidic ionic liquid [C<sub>3</sub>SO<sub>3</sub>Hmim]HSO<sub>4</sub>.<sup>206</sup> The effect of the structural properties of IL on the chitin conversion and the role of the acetamino group was investigated in detail. At 180 °C and 5 h, 56.5 mol% of LA was obtained from 3.4 wt% of chitin. A significant increase in LA yield (67 mol%) was observed when 0.7 wt% of chitin was used. [C<sub>3</sub>SO<sub>3</sub>Hmim]Cl was found to have remarkable efficiency in LA (54 mol%) formation despite its lower acidity compared with [C<sub>3</sub>SO<sub>3</sub>Hmim]HSO<sub>4</sub>. However, the catalyst's activity decreased in recycling experiments, with the LA yield reaching 34 mol% in the fifth catalytic cycle, likely due to a decline in acidity resulting from an interaction with NH<sub>3</sub> released during the reaction. The addition of 1 equivalent of H<sub>2</sub>SO<sub>4</sub> as a supplement maintained a consistent catalytic activity. A two-way approach to the depolymerization and formation of LA was proposed by the investigators (Scheme 10). It can be either *via* deacetylation followed by depolymerization to GA and LA or by direct depolymerization to NAG and its conversion to GA and LA.

In another study, they presented a highly selective one-step method for synthesizing LA from raw crab shells using [C<sub>3</sub>SO<sub>3</sub>Hmim]HSO<sub>4</sub>.<sup>207</sup> They achieved a notable 77.9% LA yield at 180 °C in a 5 hour reaction. The acidity and hydrogen-bonding ability of the IL played a crucial role in the catalytic activity.

Monitoring the degree of acetylation at various time intervals provided insight into the reaction's mechanism, revealing that direct depolymerization and successive deacetylation or depolymerization occurring on the outer surface of the chitin while the inner crystalline structure remained inert were viable pathways. However, the catalytic activity of the IL diminished within the first three cycles due to the deamination of NAG and the CaCO<sub>3</sub> component in crab shells. The addition of H<sub>2</sub>SO<sub>4</sub> during recycling proved effective in restoring the activity. Theoretical investigations on chitin to LA conversion also appeared in recent literature. Tian *et al.* investigated the impact of −SO<sub>3</sub>H functionalized ionic liquids on chitin conversion to LA through a comprehensive analysis using DFT

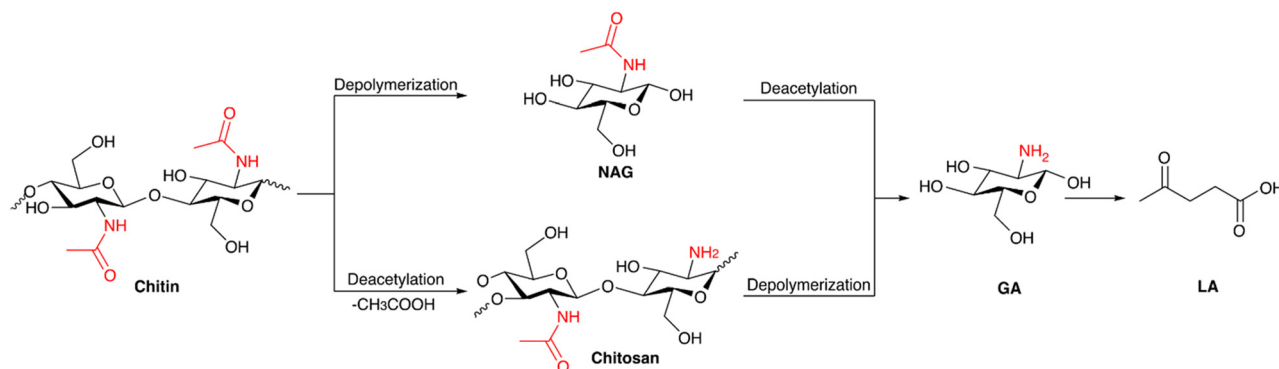

**Scheme 10** Proposed mechanism of formation of LA from chitin.

studies. In their research, the relative catalytic activity of the IL was predicted by calculating the LUMO–HOMO band gap of the most stable complexes of IL–NAG. Imidazolium-based ILs exhibited the highest activity, followed by pyridinium cation- and ammonium cation-based ILs. Through  $^1\text{H}$  NMR and DFT analysis,  $[\text{C}_4\text{SO}_3\text{Hmim}]\text{HSO}_4$  was identified as the catalyst of choice for converting chitin to LA. Under reaction conditions of 190 °C for 5 hours, utilizing 1 g of chitin with a catalyst amount of 1.5 g in 6 g of water,  $[\text{C}_4\text{SO}_3\text{Hmim}]\text{HSO}_4$  showed a remarkable LA yield of 74.7%.<sup>208</sup>

Table 10 summarizes literature findings on converting chitin biomass into LA. These data reveal that for LA synthesis, a catalyst with higher acidity is essential with control of acidity to minimize humin formation. MSA and acid-functionalized ionic liquids exhibited a superior performance among all the catalysts. Although ILs required longer reaction times, they proved to be effective for the direct conversion of raw shell waste. However, challenges arise due to the deactivation of acid catalysts in the presence of minerals in shell waste and the removal of acetamido groups in the form of  $\text{NH}_3$ . Also, the

separation and purification of products remain unresolved in the current solvent and catalytic systems. This complexity underscores the need for designing an efficient, recyclable, cost-effective, and environmentally friendly catalyst for the chitin to LA conversion process.

Acetic acid (AA) is another important organic acid that can be obtained from chitin. The production of acetic acid is more practical from chitin biomass in comparison with lignocellulosic biomass. This is due to the fact that the hydrolysis of the acetamido group in chitin invariably results in the simultaneous removal of acetic acid. Yan and co-workers have demonstrated the hydrothermal oxidation of raw shrimp shells and chitin to produce AA and pyrrole in a single-step transformation.<sup>151</sup> 100 mg of chitin in 5 mL of 2 M NaOH solution was converted into 23.5% of AA without any oxidant and metal oxide additives at 300 °C in 35 min, while the use of ball milled CuO and 5 bar oxygen enhanced the AA yield up to 38.1% and 47.9% of AA was obtained from crude shrimp shell waste, under similar conditions. Along with AA, other acid products such as LA, FA, oxalic acid (OxA), glycolic acid (GlyA),

**Table 10** Levulinic acid formation from chitin biomass

Substrate	Catalyst	Reaction conditions			LA (% yield)	Ref.
		Solvent	Temperature (°C)	Time (h)		
Chitosan	HCl	Water	190 (MW <sup>a</sup> )	0.5	32.7	201
	H <sub>2</sub> SO <sub>4</sub>				37.8	
GA	H <sub>2</sub> SO <sub>4</sub>	Water	188	0.82	25.3	202
Chitin	HCl	DCE	150	3	29	
GA	0.5 M MSA	Water	200	0.5	49.9	178
Chitosan	0.2 M MSA	Water	200	0.5	28.2	179
Chitosan	SnCl <sub>4</sub> ·5H <sub>2</sub> O	Water	200 (MW <sup>a</sup> )	0.5	23.9	176
Chitin					11.5	
Chitosan	Sulfamic acid	Water	200	0.25	33.8	182
Chitosan	ZrOCl <sub>2</sub>	Water	200	0.3	21.3	203
GA	Amberlyst-15	Water	180	1	36.9	204
Chitosan	$[\text{C}_3\text{SO}_3\text{Hmim}]\text{HSO}_4$	Water	170	5	49	205
Chitin	$[\text{C}_3\text{SO}_3\text{Hmim}]\text{HSO}_4$	Water	180	5	56.5	206
	$[\text{C}_3\text{SO}_3\text{Hmim}]\text{Cl}$				54	
Crab shell	$[\text{C}_3\text{SO}_3\text{Hmim}]\text{HSO}_4$	Water	180	5	77.9	207
Chitin	$[\text{C}_4\text{SO}_3\text{Hmim}]\text{HSO}_4$	Water	190	5	74.7	208

<sup>a</sup> MW: microwave heating.



and various other C4–C6 acids containing hydroxyl groups were also identified and quantified using GC-MS, GC-FID and TOC (total organic carbon) analyses. Using  $^{13}\text{C}$ -labeled acetamido groups in NAG, the relative ratio of AA formed from the pyranose ring and the sidechain acetamido group was determined *via* GC-MS. The analysis revealed that 60% of AA formation resulted from acetamido group hydrolysis, while the remaining 40% originated from pyranose ring decomposition and oxidation. The proposed mechanism involves chitin deacetylation and depolymerization to GA and AA, with subsequent deamination leading to C6-sugars. Parallel reactions were evidenced by the presence of unstable intermediates, ultimately converting into various stable organic acids. Untreated tiger shrimp shell powder, utilized under similar conditions, yielded 47.9% AA, suggesting the protein content in shrimp shells contributes to AA formation.

2-Amino-2-deoxy-D-gluconic acid or glucosaminic acid (AGA) is an  $\alpha$ -amino acid which is having potential applications as a starting material in synthetic chemistry and used in various biomedical applications.<sup>209</sup> GA can be converted into AGA by the oxidative cleavage of the O–C bond in the pyranose form of GA. While numerous enzymatic and microbial methods exist for this conversion, the literature reports only a limited number of chemo-catalytic approaches for the transformation of GA to AGA. In 1915 oxidation of GA to AGA was tried with  $\text{HgO}$  and  $\text{H}_2\text{S}$  but the process was not well considered due to environmental concern and lack of consistency in the activity, and also the mercuric sulphide left in the reaction was not separable easily.<sup>210</sup> Later an active charcoal-supported Pd–Bi bimetallic catalyst in the presence of molecular oxygen was found to oxidize GA to form AGA at 30 °C.<sup>211</sup> 70% of the AGA was achieved in the reaction in pure form. The mechanism was proposed to be the oxidative dehydrogenation of glucosamine hydrochloride. The role of Bi was as the co-catalyst, and it reduced the over-oxidation of the Pd surface during the reaction. The catalyst was recyclable for eight cycles. Tominaga and colleagues introduced an electrocatalytic method for oxidizing glucosamine (GA) in both basic and neutral pH environments.<sup>212</sup> They utilized a carbon electrode modified with 2 nm-sized gold nanoparticles and a gold plate

electrode. In an alkaline solution, the conversion to AGA achieved a remarkable current efficiency of 100% at  $-0.2\text{ V}$ , while in a neutral pH, AGA was detected with an approximate current efficiency of 70% at  $0.4\text{ V}$ .

Ebitani *et al.* investigated the air oxidation of GA-HCl and its derivatives in a base-free environment using gold (Au) particles supported on heterogeneous basic supports.<sup>213</sup> Various supports were examined, with Au/HT (hydrotalcite) and Au/MgO catalysts showing the best activity. At 40 °C and 3 hours under  $\text{O}_2$  flow, Au (2 wt%)/HT and Au (0.9 wt%)/MgO produced 89% and 93% of AGA, respectively. Other amino sugars such as NAG and NAM were also oxidized to yield the corresponding acids at approximately 90% under similar conditions. However, Au/HT exhibited reduced activity in successive cycles, with an agglomeration of Au particles in the spent catalyst. Conversely, the high basicity of MgO prevented Au particle growth, maintaining high catalytic activity during the first and second reuses. Furthermore, Yan *et al.* developed a two-step process for the transformation of chitosan salts to form AGA using an Au/MgO catalyst system.<sup>214</sup> Initially, mineral/organic acid-treated chitosan underwent hydrolysis with the solid acid catalyst Amberlyst-15. Subsequently, oxidation using Au/MgO yielded AGA. A monomer yield of 58% was achieved when chitosan treated with  $\text{H}_2\text{SO}_4$  was utilized as the substrate at 160 °C in 2 hours. However, the presence of polymeric material and humins during hydrolysis impeded the oxidation catalyst's activity, limiting the AGA yield to 17%. The introduction of a detoxification method using activated carbon for the hydrolyzed product, followed by oxidation, significantly increased the AGA yield to 63% under 5 bar  $\text{O}_2$  pressure at 40 °C in 3 hours.

Recently Chen *et al.* reported the conversion of chitin-derived NAG into organic acids. The reaction employed 0.1 M NAG and 0.5 M NaOH at 35 °C for 48 hours, utilizing various oxidants.<sup>215</sup> Under ambient air, the total yield of organic acid products reached 72.3%, encompassing acetic acid (AA), formic acid (FA), and glyceric acid (GlycA). Product selectivity was influenced by the choice of oxidants, with a predominant formation of FA (57.1%) observed when hydrogen peroxide ( $\text{H}_2\text{O}_2$ ) was utilized. Conversely, the use of oxygen favored the production of AA and GlycA, constituting 41.2% of the major

**Table 11** Formation of other organic acids from chitin biomass

Substrate	Catalyst	Reaction conditions				Product (% yield)	Ref.
		Solvent	Temperature (°C)	Time (h)	$\text{O}_2$ (bar)		
Chitin	CuO	NaOH	300	0.58	5	AA (38.1)	151
Shrimp shell						AA (47.9)	
GA	Pd–Bi/C + $\text{KHCO}_3$	Water	30	6	Bubbled $\text{O}_2$	AGA (70)	211
GA	Au on carbon electrode	Alkaline water	—	—		AGA (100)	212
GA	Au(0.9)/MgO	Water	40	3	1	AGA (93)	213
	Au(2)/HT					AGA (89)	
Chitosan– $\text{H}_2\text{SO}_4$	Amberlyst-15 + Au/MgO	Water	40	3	5	AGA (63)	214
NAG	NaOH + $\text{H}_2\text{O}_2$	Water	35	48	—	FA (57.1)	215
	NaOH	Water	35	48	5	AA + GlycA (41.2)	
Chitin	MgO	Water	260	6	—	LcA (10.8)	216
GA						LcA (23.3)	
NAG						LcA (7.7)	

products. Following this, various metal oxide catalysts were assessed for the direct oxidation of chitin itself, with MgO exhibiting the most efficient catalytic activity, resulting in a significant yield of 10.8% lactic acid (LcA) as the major product at 260 °C in a 6 hour reaction.<sup>216</sup> The conversion of GA and NAG under similar reaction conditions showed LcA yields of 23.3% and 7.7%, respectively. While the catalyst demonstrated recyclability for the initial three runs, the first recycling revealed 15% Mg leaching. The accelerated leaching of Mg was attributed to the formation of acidic products.

Table 11 summarizes literature reports on organic acids obtained from chitin biomass oxidation reactions. Given the limited number of studies conducted on the oxidation of chitin biomass, there exists a significant scope for exploring various catalytic systems in this reaction.

The incorporation of a base or basic support is crucial in oxidation reactions and designing a suitable catalyst for achieving the selective formation of acids, such as AGA and LcA, is highly desirable. Additionally, addressing the challenge of separating the various acids formed during the reaction underscores the importance of research focused on selectivity.

## 5 SWOT analysis

A SWOT analysis for the conversion of chitin to value-added chemicals can help to identify the strengths, weaknesses, opportunities, and threats associated with this process. As the drive toward eco-friendly and sustainable solutions gains momentum, understanding the potential and constraints of this process becomes vital. A SWOT analysis diagram for the production of chemicals from chitin is given in Fig. 6.

### 5.1 Strengths

Chitin is the second most abundant biopolymer, making it an excellent resource for the production of renewable chemicals.

Chitin is primarily derived from crustacean shells, a byproduct of fisheries and marine aquaculture, ensuring its continued production in the future. The production of nitrogen-containing chemicals from renewable resources, which does not require ammonia synthesized from the energetically inefficient Haber process, is expected to play a vital role in achieving net zero emissions and sustainable development goals. In this context, chitin, as the only nitrogen-containing renewable resource, is invaluable as a feedstock. Furthermore, the use of shell waste would decrease environmental pollution and waste management costs.

### 5.2 Weaknesses

The main weakness is that basic research on chitin as a feedstock is still in its early stages. The major advances in chitin chemistry have been made by drawing parallels with cellulose chemistry due to structural similarities. The general principles of chitin chemistry are not well understood. Furthermore, there is no techno-economic analysis done so far in the field of production of chemicals from the catalytic conversion of chitin biomass to determine the industrial viability of the associated process. Another issue is that commercial chitin extraction methods are not environmentally friendly, as most of the processes focus solely on chitin extraction, while the other components of shell waste are not properly utilized.

### 5.3 Opportunities

The abovementioned weakness creates significant opportunities. More systematic research is needed in the field to determine a chitin extraction process that focuses on utilizing the protein, lipid, and mineral components of shell waste in addition to chitin, as the co-production of all the components would reduce costs. Understanding the reaction mechanism provides ample opportunities for rationally designing catalytic active sites for chitin conversion to chemicals. Because chitin-

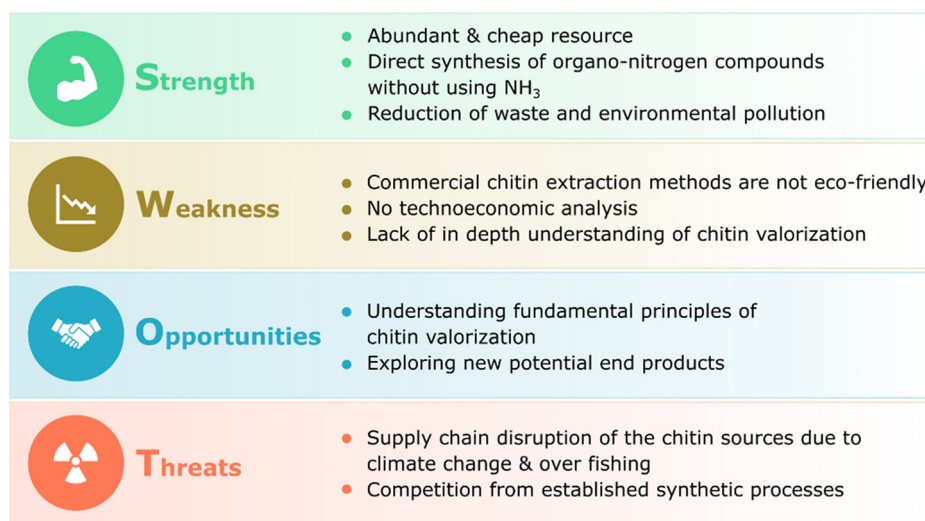


Fig. 6 SWOT analysis for the production of chemicals from chitin biomass.

derived chemicals have a wide range of applications in the polymer and pharmaceutical industries, also the new end products can be compared with existing related products. For example, the properties of polymers that can be synthesized from chitin-derived monomers should be investigated, as this will aid in identifying important monomers and providing researchers with a meaningful goal for the development of catalytic reactions.

#### 5.4 Threats

Despite these opportunities, several threats loom over the process. The most serious threat to the process is likely to be the cost competitiveness of the end products. The main competition would come from existing similar products. Furthermore, the industrialization of chitin-based end products may necessitate a different infrastructure than what is currently in place, which could serve as a bottleneck. On the other hand, shell waste supply chain disruptions may occur as a result of rapid climate change, overfishing, or other causes.

Overall, the establishment of a chitin-based bio-refinery would require more careful fundamental research and careful governance and policies.

## 6 Analysis of products in chitin chemistry

As we have discussed in the previous sections there are a reasonable number of studies on the valorization of chitin and chitosan to yield various chemicals with or without nitrogen. However, it is observed from the literature that the reported analytical methods can detect and quantify either oligomer or monomer or furan derivatives. The polarity of amino sugars and sugar derivatives are very close to each other and mostly soluble in water, and that is why they are hard to separate. Moreover, due to lack of optimum analytical conditions, a few products were not separated, and some were undetected. From the literature, it was seen that chitin/chitosan-derived compounds can be separated and quantified by various analytical methods like chromatographic (gas chromatography (GC),<sup>111,186,217</sup> column chromatography, high-performance liquid chromatography (HPLC)<sup>181,186,218</sup>), chemical (Fehling's test, gravimetric analysis)<sup>219</sup> and colorimetric methods (DNS method).<sup>181,195,218,220</sup>

In our work, firstly, the properties (*e.g.*, kinetic diameter, melting point, boiling point, degradation temperature, solubility, molecular weight) of chitin-derived compounds (mainly acid-catalysed depolymerization and degradation products of chitin biomass such as GA, NAG and HMF) were examined, which is very essential before starting the analytical method development.<sup>221</sup> The study suggested that the compounds may not be separated only on the basis of their polarities since they are mostly polar in nature, which was evidenced from their higher solubility in water compared with methanol. The size-based separation of these compounds is not possible as they have very minimal differences in their size (kinetic diameter of

GA, NAG and HMF is 6.954 Å, 7.460 Å, and 6.186 Å respectively). The amino sugar compounds GA and NAG cannot be analyzed by gas chromatography as they degrade at the higher temperatures used to vaporize the samples. A TLC (thin layer chromatography) experiment was conducted to understand the trend in polarity of these compounds and  $R_f$  (retention factor) values. It was realized that the polarity trend follows the order GA > NAG > HMF. Considering all these factors, we have presumed that HPLC is the easiest, most convenient, rapid, and sensitive technique to separate chitin-derived chemicals which are both water soluble and organic. Researchers have extensively employed HPLC as a primary analytical technique for chitin/chitosan valorization chemistry. However, there is a lack of prior reports on the simultaneous separation and quantification of all the compounds derived from chitin/chitosan during the reaction. This is primarily due to the limited research conducted in selecting suitable analytical techniques capable of effectively separating and quantifying these compounds.<sup>108,186,221</sup>

After a thorough literature survey on the analysis of chitin/chitosan-derived products, our group has worked towards the investigation and optimization of various HPLC parameters which can simultaneously separate and quantify various chitin-derived compounds.<sup>221</sup> Initially, the mixture of GA, NAG, and HMF was analyzed using a previously reported HPLC method employed in chitin chemistry for HMF analysis. In this analysis, an C18 column (non-polar), a mobile phase consisting of methanol and water (2.3/7.7 v/v), and a UV detector set at a wavelength of 284 nm were used.<sup>181</sup> However, only HMF was detected, and no peaks corresponding to GA and NAG were observed. From the UV-Visible absorption study of the compounds, we have observed that the  $\lambda_{\max}$  (maximum absorption wavelength) value for amino sugars was at 195 nm. This indicates that the UV wavelength on the detector should be set at 195 nm to effectively detect these compounds. In the previously reported literature, a UV detector with a wavelength of 284 nm was employed, resulting in the detection of only HMF ( $\lambda_{\max}$  = 284 nm). As a consequence, compounds that do not exhibit UV activity below 284 nm could not be analyzed using this method.

In our study, setting the UV wavelength to 195 nm allowed the detection of all the compounds, based on the understanding that higher energy is associated with lower wavelengths, effectively exciting electrons in all the compounds. Another challenge that arose was the selection of the VWD wavelength when using a methanol/water mobile phase. It was crucial to set the wavelength above 205 nm due to methanol's UV cut-off at that value. According to the literature, the measurement wavelength should be higher than the UV cut-off of the mobile phase to prevent any contribution from the mobile phase in the measured absorbance.<sup>222</sup>


To address the limitations posed by methanol's UV cut-off, we replaced it with acetonitrile, which has a lower UV cut-off (<190 nm). The use of acetonitrile led to less difference in the retention times of the compounds compared with methanol, owing to the different polarity index of acetonitrile. Our ana-

lysis was conducted with a C18 column, utilizing an acetonitrile/water ratio of 2.3/7.7 v/v and a VWD wavelength of 195 nm. To further enhance the compound separation, we introduced a more polar solvent, specifically water, into the mobile phase. By varying the acetonitrile-to-water ratio, we explored different combinations. After evaluating all the possible ratios, we found that a 1/9 v/v ratio of acetonitrile to water provided the best separation of GA, NAG, and HMF. This optimized condition allowed us to achieve improved resolution and differentiation between the compounds.

During our investigation, we also examined the effect of column length on compound separation. It was determined that longer columns are more effective in separating compounds as they allow for a greater interaction time with the stationary phase, minimizing the chance of peak merging. However, when utilizing a non-polar C18 column for analyzing other sugars and chitin valorized products, the retention times showed only minimal differences, making it difficult to achieve distinct peaks. In an attempt to improve the separation, we opted to use a polar column (amino column) since

polar compounds are expected to exhibit strong interactions with a polar stationary phase. However, the chromatogram obtained using the polar column showed peak tailing, suggesting that the compounds were strongly retained on the stationary phase due to strong interactions. This finding led us to conclude that polar columns are not suitable for separating these polar compounds, as they tend to exhibit tailing and peak merging, resulting in undesirable separation. Based on our previous experimental observations, it became clear that the stationary phase should possess an optimum polarity to facilitate the rapid adsorption-desorption of the compounds on the stationary phase. Then we carried out the experiments on an ion-exchange column (monosaccharide lead ( $\text{Pb}^{2+}$ ) column). In this column the stationary phase is composed of sulfonated styrene divinyl benzene polymer with  $\text{Pb}^{2+}$  exchanged cations and offering medium polarity. A suitable separation was observed when water was used as the mobile phase ( $0.5 \text{ mL min}^{-1}$  flow rate), a column temperature of  $80^\circ\text{C}$ , and a VWD wavelength of 195 nm. In addition to this, other sugars and chitin-derived compounds showed clear separation with this column and the abovementioned analysis conditions. A schematic representation of the separation of various amino sugars and chitin-derived chemicals using  $\text{Pb}^{2+}$  is given in Fig. 7. Method validation was done by ensuring precision, day to day variations and repeatability and proved to be accurate and sensitive.

In order to accomplish effective separation of chitin/chitosan-derived compounds, we evaluated various columns with different properties, including polarity, length, and stationary phase, together with mobile phases of varying polarity. Through our experimental study, we discovered that both the C18 (non-polar) column and the cation exchange  $\text{Pb}^{2+}$  column (medium polar) was suitable for the detection and separation of amino sugar monomers and dimers, other N-containing compounds, and furan derivatives. Although the non-polar C18 column exhibited better separation compared with the polar amino column, it struggled to separate sugars with

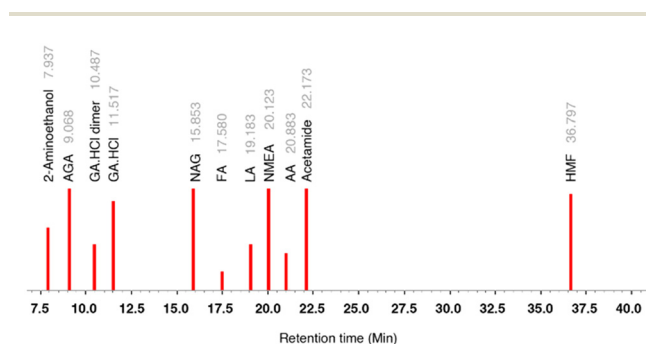

**Fig. 7** Separation of various chitin-derived chemicals by HPLC on a  $\text{Pb}^{2+}$  monosaccharide column (analysis conditions: column temperature:  $80^\circ\text{C}$ , mobile phase: water, flow rate:  $0.5 \text{ mL min}^{-1}$ , VWD wavelength: 195 nm).

**Table 12** Summary of the separation of different compounds using various columns, and analysis conditions using HPLC

Column	Polarity, phase, (length $\times$ internal diameter in mm, matrix, particle size in $\mu\text{m}$ , pH range)	Analysis conditions (mobile phase, flowrate, column temperature, VWD wavelength)	Remarks on separation [compounds (RT in minutes)]
C18	Non-polar, reverse ( $250 \times 4.6$ , octadecylsilane, 5, 2–9)	Acetonitrile : water (1 : 9 v/v), $0.5 \text{ mL min}^{-1}$ , $25^\circ\text{C}$ , 195 nm	Good separation of GA (4.037), NAG (5.582) and HMF (9.735) but retention times of other products were merging [AA (5.983), NAG (5.582)], [GA-HCl dimer (3.994), GA (4.037), AGA (4.126)]
Amino	Non-polar, reverse ( $100 \times 4.6$ , octadecylsilane, 5, 2–9)	Acetonitrile : water (1 : 9 v/v), $0.5 \text{ mL min}^{-1}$ , $25^\circ\text{C}$ , 195 nm	Peaks of GA and NAG were merged as compounds got less interaction time with the stationary phase
Monosaccharide $\text{Pb}^{2+}$	Polar, normal ( $250 \times 4.6$ , silica, 2–8)	Acetonitrile : water (8 : 2 v/v), $0.5 \text{ mL min}^{-1}$ , $30^\circ\text{C}$ , 195 nm	Tailing of peaks due to strong interaction; peaks of HMF (7.130), acetamide (7.990) and AGA (7.493) were merged due to peak tailing
	Medium polar, reverse ( $300 \times 7.8$ , sulfonated styrene divinyl benzene, 8, 7)	Water, $0.5 \text{ mL min}^{-1}$ , $80^\circ\text{C}$ , 195 nm	Very good separation of GA (11.517), NAG (15.853) and HMF (36.797). Separations of other products were also good [AGA (9.068), GA-HCl dimer (10.487), LA (19.183), AA (20.883), acetamide (22.173)]



similar functionality and polarity, while the cation exchange  $\text{Pb}^{2+}$  column was able to effectively separate most of the compounds due to its optimum polarity. A summary of the HPLC analysis parameters and separation of compounds is given in Table 12. With the developed HPLC method, we achieved separation of amino sugars and HMF within 39 minutes and observed a strong linear relationship as indicated by the regression analysis. As a result, we have successfully established a simple, quick, accurate, and precise HPLC method that enables the separation and quantification of chitin/chitosan-derived products.

## 7 Conclusions

1. In this review, we described various methods of fractionating shell waste into different components. We have described in detail the various products obtained so far from the catalytic conversion of chitin and chitin derivatives to N-containing furan compounds, amino sugars, heterocyclic compounds such as pyrazines and pyrrole, amino acids, amines, amino sugar alcohols, and 5-hydroxymethylfurfural, levulinic acid, acetic acid, and glucosaminic acid, among others.

2. Even though shell waste is inexpensive, the current fractionation methods require a higher price for high-purity chitin. New fractionation techniques that are inexpensive, environmentally friendly, and efficient must be developed to obtain chitin without compromising the product purity or resulting in the loss of other valuable components.

3. The direct transformation of chitin is difficult due to the recalcitrant structure of chitin, while the products were easily attainable from low molecular weight chitosan and monomeric compounds.

4. In the hydrolysis and dehydration reactions of chitin biomass, while homogeneous acid and base catalysts exhibit efficiency in achieving reasonable conversion, their drawbacks, including corrosiveness, poor recovery and reusability, and the loss of nitrogen atoms from product molecules pose significant challenges. Conversely, ionic liquid catalytic systems demonstrate promising performance in terms of product selectivity.

5. Due to the significant risk of catalytic site poisoning by ammonia during dehydration reactions, prioritizing the production of nitrogen-containing furan derivatives or other heterocycles over the synthesis of HMF and LA from chitin is recommended. This preference is based on the potential transformations of these nitrogen-containing compounds, underscoring the crucial importance of preserving the amino/acetamido group intact during the catalytic processes.

6. Given the environmentally benign nature and ease of separation, there is a strong inclination towards employing heterogeneous catalysts in chitin biomass conversion. While recent attempts have utilized heterogeneous catalysts for chitin valorization, there remains massive potential for exploration and

innovation in the realm of heterogeneous catalytic systems for this purpose.

7. The vast potential of hydrogenation and oxidation reactions remains largely unexplored. There is a need for extensive research into various catalytic systems to selectively produce desired products. Additionally, the exploration of potential upgrades for hydrogenation products represents a promising avenue that has yet to be thoroughly investigated.

8. It is crucial to comprehend both the potential and constraints of chitin valorization to propel this research area into a commercially viable process. Conducting a SWOT analysis enabled us to do a comprehensive exploration of the strengths, weaknesses, opportunities, and threats associated with chitin valorization, thereby enhancing the current scope of this review.

9. Future research in this field is expected to focus on several key directions. First, there will be efforts to develop efficient methods for extracting high-purity chitin from shell waste, optimizing the process to maximize yield and minimize waste and production cost.

10. Another area of interest will be the synthesis of nitrogen-containing chemicals from chitin. Researchers may explore novel approaches and reaction pathways to convert chitin into valuable nitrogen-based compounds, such as amino acids, amines, and other nitrogen-containing derivatives.

11. Designing suitable catalysts for the chemical transformation of chitin biomass will also be a priority. Catalyst development can enable more efficient and selective reactions, leading to improved yields and reduced energy consumption in chitin valorization processes. The designing of the catalysts should also consider the structural rigidity and the features of the target chemicals.

12. Moreover, conducting a thorough examination of reaction mixtures through the utilization of suitable analytical tools should be essential. Employing advanced analytical techniques to characterize reaction intermediates, by-products, and end products will offer profound insights into the intricacies of reaction mechanisms, reaction kinetics, catalyst impact, and the optimization of reaction conditions. This acquired knowledge will play a pivotal role in enhancing the precision and optimization of chitin valorization processes in the future.

13. The separation of the products and their purification is another area which is lacking in the studies of chitin biomass valorization. Devising these protocols is mandatory for commercial viability of the end products. Developing efficient separation techniques, such as chromatography or membrane-based processes, will enable the extraction as well as purification of target compounds from complex reaction mixtures.

14. Detailed investigations are required to make this valorization process economically viable on a large scale in future.

15. Combining the process of chitin extraction from shell waste and its conversion into various value-added products is highly recommended in terms of industrial upscaling of the valorization of raw shell waste.

16. Awareness about the possibilities of shell waste applications should be passed on to the fisheries sector. Also, establishing industries on fisheries sites for the production of chitin and shell waste fractionation could be beneficial in terms of the commercial production of chitin.

17. Research efforts for making cascade processes for the direct conversion of shell waste to value-added chemicals have to be considered and the potential of this conversion process has to be acknowledged and emphasized properly to build a foundation for shell waste-based shell-biorefinery.

## Author contributions

Lavanya K: conceptualization, data curation, visualization, writing – original draft, and writing – review & editing, Neha Ghosh: writing – review & editing, Paresh L Dhepe: supervision and writing – review & editing.

## Conflicts of interest

The authors declare no conflicts of interest.

## Acknowledgements

Lavanya K thanks CSIR, New Delhi for the research fellowship.

## References

- 1 G. Velvizhi, C. Goswami, N. P. Shetti, E. Ahmad, K. Kishore Pant and T. M. Aminabhavi, *Fuel*, 2022, **313**, 122678.
- 2 Y. Liao, S.-F. Koelewijn, G. Van den Bossche, J. Van Aelst, S. Van den Bosch, T. Renders, K. Navare, T. Nicolai, K. Van Aelst, M. Maesen, H. Matsushima, J. M. Thevelein, K. Van Acker, B. Lagrain, D. Verboekend and B. F. Sels, *Science*, 2020, **367**, 1385–1390.
- 3 A. Corma Canos, S. Iborra and A. Velty, *Chem. Rev.*, 2007, **107**, 2411–2502.
- 4 H. Kobayashi, H. Ohta and A. Fukuoka, *Catal. Sci. Technol.*, 2012, **2**, 869–883.
- 5 P. Bhaumik and P. L. Dhepe, *Catal. Rev.*, 2016, **58**, 36–112.
- 6 FAO, *The State of World Fisheries and Aquaculture 2022, Towards Blue Transformation*, Rome, 2022, FAO, DOI: [10.4060/cc0461en](https://doi.org/10.4060/cc0461en).
- 7 J. P. Morris, T. Backeljau and G. Chapelle, *Rev. Aquac.*, 2019, **11**, 42–57.
- 8 X. Chen and N. Yan, *Catal. Surv. Asia*, 2014, **18**, 164–176.
- 9 X. Chen, H. Yang and N. Yan, *Chem. – Eur. J.*, 2016, **22**, 13402–13421.
- 10 M. J. Hülsey, *Green Energy Environ.*, 2018, **3**, 318–327.
- 11 A. Fukuoka and H. Kobayashi, *J. Jpn. Pet. Inst.*, 2023, **66**, 48–56.
- 12 M. J. Hülsey, H. Yang and N. Yan, *ACS Sustainable Chem. Eng.*, 2018, **6**, 5694–5707.
- 13 N. Lucas, A. A. Athawale and C. V. Rode, *Chem. Rec.*, 2019, **19**, 1995–2021.
- 14 C. Schmitz, L. G. Auza, D. Koberidze, S. Rasche, R. Fischer and L. Bortesi, *Mar. Drugs*, 2019, **17**, 452.
- 15 J. Dai, F. Li and X. Fu, *ChemSusChem*, 2020, **13**, 6498–6508.
- 16 X. Cai, Z. Wang, Y. Ye, D. Wang, Z. Zhang, Z. Zheng, Y. Liu and S. Li, *Renewable Sustainable Energy Rev.*, 2021, **150**, 111452.
- 17 D. Zhou, D. Shen, W. Lu, T. Song, M. Wang, H. Feng, J. Shentu and Y. Long, *Molecules*, 2020, **25**, 541.
- 18 B. Xu, Z. Du, J. Dai, R. Yang, D. Yang, X. Gu, N. Li and F. Li, *Catalysts*, 2022, **12**, 653.
- 19 X. Shi, X. Ye, H. Zhong, T. Wang and F. Jin, *Mol. Catal.*, 2021, **505**, 111517.
- 20 N. Islam, M. Hoque and S. F. Taharat, *World J. Microbiol. Biotechnol.*, 2023, **39**, 1–17.
- 21 N. Yan and X. Chen, *Nature*, 2015, **524**, 155–157.
- 22 V. Šimat, N. B. Rathod, M. Čagalj, I. Hamed and I. Generalić Mekinić, *Mar. Drugs*, 2022, **20**, 206.
- 23 M. L. Maia, C. Grosso, M. F. Barroso, A. Silva, C. Delerue-Matos and V. F. Domingues, *Antioxidants*, 2023, **12**, 1–12.
- 24 M. M. H. Al Omari, I. S. Rashid, N. A. Qinna, A. M. Jaber and A. A. Badwan, in *Profiles of Drug Substances, Excipients and Related Methodology*, ed. H. G. Brittain, Elsevier Inc., 1st edn, 2016, vol. 41, pp. 31–132.
- 25 G. O. Bamigboye, A. T. Nworgu, A. O. Odetoyan, M. Kareem, D. O. Enabulele and D. E. Bassey, *J. Build. Eng.*, 2021, **34**, 101864.
- 26 A. Naqi, S. Siddique, H. K. Kim and J. G. Jang, *Constr. Build. Mater.*, 2020, **230**, 116973.
- 27 B. A. Tayeh, M. W. Hasaniyah, A. M. Zeyad and M. O. Yusuf, *J. Cleaner Prod.*, 2019, **237**, 117723.
- 28 U. G. Eziefula, J. C. Ezech and B. I. Eziefula, *Constr. Build. Mater.*, 2018, **192**, 287–300.
- 29 Z. Pavlík, M. Záleská, M. Pavlíková, A. Pivák, A. M. Lauermannová, M. Lojka, A. Jiříčková, G. Łagód and O. Jankovský, *Constr. Build. Mater.*, 2023, **394**, 132069.
- 30 M. Yadav, P. Goswami, K. Paritosh, M. Kumar, N. Pareek and V. Vivekanand, *Bioresour. Bioprocess.*, 2019, **6**, 8.
- 31 D. Sahoo and P. L. Nayak, in *Biopolymers*, John Wiley & Sons, Inc., Hoboken, NJ, USA, 2011, pp. 129–166.
- 32 A. C. A. Wan and B. C. U. Tai, *Biotechnol. Adv.*, 2013, **31**, 1776–1785.
- 33 G. Cárdenas, G. Cabrera, E. Taboada and S. P. Miranda, *J. Appl. Polym. Sci.*, 2004, **93**, 1876–1885.
- 34 K. M. Varum, M. H. Ottoy and O. Smidsrod, *Carbohydr. Polym.*, 2001, **46**, 89–98.
- 35 M. He, X. Wang, Z. Wang, L. Chen, Y. Lu, X. Zhang, M. Li, Z. Liu, Y. Zhang, H. Xia and L. Zhang, *ACS Sustainable Chem. Eng.*, 2017, **5**, 9126–9135.
- 36 S. Rejinold N, K. P. Chennazhi, H. Tamura, S. V. Nair and J. Rangasamy, *ACS Appl. Mater. Interfaces*, 2011, **3**, 3654–3665.

- 37 J. Lv, X. Lv, M. Ma, D. H. Oh, Z. Jiang and X. Fu, *Carbohydr. Polym.*, 2023, **299**, 120142.
- 38 M. Nasrollahzadeh, M. Sajjadi, S. Iravani and R. S. Varma, *Carbohydr. Polym.*, 2021, **251**, 116986.
- 39 J. L. Shamshina, P. Berton and R. D. Rogers, *ACS Sustainable Chem. Eng.*, 2019, **7**, 6444–6457.
- 40 P. A. Sandford and A. Steinnes, in *Water-Soluble Polymers: Synthesis, Solution Properties, and Applications—Preface*, ed. S. W. Shalaby, C. L. McCormick and G. B. Butler, American Chemical Society, 1991, pp. 430–445.
- 41 N. Kulkarni, S. D. Shinde, G. S. Jadhav, D. R. Adsare, K. Rao, M. Kachhia, M. Maingle, S. P. Patil, N. Arya and B. Sahu, *Bioconjugate Chem.*, 2021, **32**, 448–465.
- 42 D. Sahoo, S. Sahoo, P. Mohanty, S. Sasmal and P. L. Nayak, *Des. Monomers Polym.*, 2009, **12**, 377–404.
- 43 Y. Tsutsumi, H. Koga, Z.-D. Qi, T. Saito and A. Isogai, *Biomacromolecules*, 2014, **15**, 4314–4319.
- 44 M. Nasrollahzadeh, N. Shafiei, Z. Nezafat, N. S. Soheili Bidgoli and F. Soleimani, *Carbohydr. Polym.*, 2020, **241**, 116353.
- 45 Á. Molnár, *Coord. Chem. Rev.*, 2019, **388**, 126–171.
- 46 W. Argüelles-Monal, J. Lizardi-Mendoza, D. Fernández-Quiroz, M. Recillas-Mota and M. Montiel-Herrera, *Polymers*, 2018, **10**, 342.
- 47 R. J. White, M. Antonietti and M. M. Titirici, *J. Mater. Chem.*, 2009, **19**, 8645–8650.
- 48 H. Watanabe, S. Asano, S. I. Fujita, H. Yoshida and M. Arai, *ACS Catal.*, 2015, **5**, 2886–2894.
- 49 Z. Li, J. Liu, Z. Huang, Y. Yang, C. Xia and F. Li, *ACS Catal.*, 2013, **3**, 839–845.
- 50 S. Chen, P. Qi, J. Chen and Y. Yuan, *RSC Adv.*, 2015, **5**, 31566–31574.
- 51 J. Luo, F. Peng, H. Wang and H. Yu, *Catal. Commun.*, 2013, **39**, 44–49.
- 52 R. P. Rocha, A. G. Gonçalves, L. M. Pastrana-Martínez, B. C. Bordoní, O. S. G. P. Soares, J. J. M. Órfão, J. L. Faria, J. L. Figueiredo, A. M. T. Silva and M. F. R. Pereira, *Catal. Today*, 2015, **249**, 192–198.
- 53 X. Xu, Y. Li, Y. Gong, P. Zhang, H. Li and Y. Wang, *J. Am. Chem. Soc.*, 2012, **134**, 16987–16990.
- 54 R. V. Jagadeesh, H. Junge, M. Pohl, J. Radnik, A. Bru and M. Beller, *J. Am. Chem. Soc.*, 2013, **135**, 10776–10782.
- 55 K. Shen, L. Chen, J. Long, W. Zhong and Y. Li, *ACS Catal.*, 2015, **5**, 5264–5271.
- 56 J. Zhou, L. Bao, S. Wu, W. Yang and H. Wang, *Carbohydr. Polym.*, 2017, **173**, 321–329.
- 57 M. Chu, Y. Zhai, N. Shang, P. Guo, C. Wang and Y. Gao, *Appl. Surf. Sci.*, 2020, **517**, 146140.
- 58 Y. Cao, M. Tang, M. Li, J. Deng, F. Xu, L. Xie and Y. Wang, *ACS Sustainable Chem. Eng.*, 2017, **5**, 9894–9902.
- 59 X. Xiao, S. H. Lim, W. Chu, Y. Liu, S. Hua Lim, W. Chu and Y. Liu, *ACS Sustainable Chem. Eng.*, 2021, **9**, 12655–12662.
- 60 N. Brun, S. A. Wohlgemuth, P. Osiceanu and M. M. Titirici, *Green Chem.*, 2013, **15**, 2514–2524.
- 61 Y. Gao, X. Chen, J. Zhang and N. Yan, *ChemPlusChem*, 2015, **80**, 1556–1564.
- 62 A. Primo, A. Forneli, A. Corma and H. García, *ChemSusChem*, 2012, **5**, 2207–2214.
- 63 X. Sun, X. Chen, Z. Wang, X. Ai, Y. Cao and J. Zhou, *ACS Appl. Energy Mater.*, 2022, **5**, 11825–11834.
- 64 W. Suginta, P. Khunkaewla and A. Schulte, *Chem. Rev.*, 2013, **113**, 5458–5479.
- 65 R. Vinodh, Y. Sasikumar, H. J. Kim, R. Atchudan and M. Yi, *J. Ind. Eng. Chem.*, 2021, **104**, 155–171.
- 66 D. Kasprzak and M. Galiński, *J. Power Sources*, 2023, **553**, 232300.
- 67 Y. Zhai, M. Chu, N. Shang, C. Wang, H. Wang and Y. Gao, *Appl. Surf. Sci.*, 2020, **506**, 144681.
- 68 K. Zhang, Q. Meng, H. Wu, T. Yuan, S. Han, J. Zhai, B. Zheng, C. Xu, W. Wu, M. He and B. Han, *Green Chem.*, 2021, **23**, 1621–1627.
- 69 Z. Lin, J. Zou, S. Li, C. Zhang, F. Xie, B. Li and D. Ye, *ACS Sustainable Chem. Eng.*, 2021, **9**, 1568–1575.
- 70 D. Polidoro, D. Rodríguez-Padron, A. Perosa, R. Luque and M. Selva, *Materials*, 2023, **16**, 575.
- 71 S. Ravichandran, G. Rameshkumar and A. Rosario Prince, *Am.-Eurasian J. Sci. Res.*, 2009, **4**, 191–194.
- 72 J. Synowiecki and N. A. A. Q. Al-Khateeb, *Food Chem.*, 2000, **68**, 147–152.
- 73 I. Aranaz, M. Mengibar, R. Harris, I. Panos, B. Miralles, N. Acosta, G. Galed and A. Heras, *Curr. Chem. Biol.*, 2009, **3**, 203–230.
- 74 X. Mao, N. Guo, J. Sun and C. Xue, *J. Cleaner Prod.*, 2017, **143**, 814–823.
- 75 W. Arbia, L. Arbia, L. Adour and A. Amrane, *Food Technol. Biotechnol.*, 2013, **9862**, 12–25.
- 76 A. Percot, C. Viton and A. Domard, *Biomacromolecules*, 2003, **4**, 1380–1385.
- 77 M. C. Gortari and R. A. Hours, *Electron. J. Biotechnol.*, 2013, **16**, 1–14.
- 78 S. Kaur and G. S. Dhillon, *Crit. Rev. Biotechnol.*, 2015, **35**, 44–61.
- 79 R. Castro, I. Guerrero-Legarreta and R. Bórquez, *Biotechnol. Rep.*, 2018, **20**, e00287.
- 80 P. Kandra, C. Murali Mohan, P. Smitha and K. P. Hemalatha, *Int. J. Appl. Biol. Pharm. Technol.*, 2010, **1**, 903–910.
- 81 O. Ghorbel-Bellaaj, I. Younes, H. Maâlej, S. Hajji and M. Nasri, *Int. J. Biol. Macromol.*, 2012, **51**, 1196–1201.
- 82 J. L. Shamshina, *Green Chem.*, 2019, **21**, 3974–3993.
- 83 M. Sharma, C. Mukesh, D. Mondal and K. Prasad, *RSC Adv.*, 2013, **3**, 18149–18155.
- 84 H. Tadesse and R. Luque, *Energy Environ. Sci.*, 2011, **4**, 3913–3929.
- 85 Y. Qin, X. Lu, N. Sun and R. D. Rogers, *Green Chem.*, 2010, **12**, 968–997.
- 86 T. Setoguchi, T. Kato, K. Yamamoto and J. ichi Kadokawa, *Int. J. Biol. Macromol.*, 2012, **50**, 861–864.
- 87 J. L. Shamshina and N. Abidi, *ACS Sustainable Chem. Eng.*, 2022, **10**, 11846–11855.

- 88 M. Bisht, I. P. E. Macário, M. C. Neves, J. L. Pereira, S. Pandey, R. D. Rogers, J. A. P. Coutinho and S. P. M. Ventura, *ACS Sustainable Chem. Eng.*, 2021, **9**, 16073–16081.
- 89 W. C. Huang, D. Zhao, N. Guo, C. Xue and X. Mao, *J. Agric. Food Chem.*, 2018, **66**, 11897–11901.
- 90 F. Hajiali, J. Vidal, T. Jin, L. C. De La Garza, M. Santos, G. Yang and A. Moores, *ACS Sustainable Chem. Eng.*, 2022, **10**, 11348–11357.
- 91 J. J. Deng, H. H. Mao, W. Fang, Z. Q. Li, D. Shi, Z. W. Li, T. Zhou and X. C. Luo, *J. Cleaner Prod.*, 2020, **271**, 122655.
- 92 S. S. Pattanaik, P. B. Sawant, K. A. M. Xavier, K. Dube, P. P. Srivastava, V. Dhanabalan and N. K. Chadha, *Aquaculture*, 2020, **515**, 734594.
- 93 H. B. Kwon, C. W. Lee, B. S. Jun, J. Do Yun, S. Y. Weon and B. Koopman, *Resour., Conserv. Recycl.*, 2004, **41**, 75–82.
- 94 L. Liu, Y. Liu, H. Shin, R. Chen, J. Li, G. Du and J. Chen, *Appl. Microbiol. Biotechnol.*, 2013, **97**, 6149–6158.
- 95 R. A. A. Muzzarelli, *Cell. Mol. Life Sci.*, 1997, **53**, 131–140.
- 96 V. K. Mourya, N. N. Inamdar and Y. M. Choudhari, *Polym. Sci., Ser. A*, 2011, **53**, 583–612.
- 97 F. Tian, Y. Liu, K. Hu and B. Zhao, *J. Mater.*, 2003, **8**, 4709–4712.
- 98 S. Tanioka, Y. Matsui, T. Irie, T. Tanigawa, Y. Tanaka, H. Shibata, Y. Sawa and Y. Kono, *Biosci. Biotechnol. Biochem.*, 1996, **60**, 2001–2004.
- 99 S. Seo, J. M. King and W. Prinyawiwatukul, *J. Food Sci.*, 2007, **72**, 522–526.
- 100 W. Xia, P. Liu and J. Liu, *Bioresour. Technol.*, 2008, **99**, 6751–6762.
- 101 A. Ajavakom, S. Supsvetson, A. Somboot and M. Sukwattanasinitt, *Carbohydr. Polym.*, 2012, **90**, 73–77.
- 102 E. Savitri, Sumarno and A. Roesyadi, *Model. Appl. Sci.*, 2015, **9**, 647–653.
- 103 E. Savitri, S. R. Juliastuti, A. Handaratri, Sumarno and A. Roesyadi, *Polym. Degrad. Stab.*, 2014, **110**, 344–352.
- 104 G. Margoutidis, V. H. Parsons, C. S. Bottaro, N. Yan and F. M. Kerton, *ACS Sustainable Chem. Eng.*, 2018, **6**, 1662–1669.
- 105 V. Y. Novikov, *Russ. J. Appl. Chem.*, 2004, **77**, 484–487.
- 106 A. Einbu and K. M. Vårum, *Biomacromolecules*, 2008, **9**, 1870–1875.
- 107 Z. Zhang, C. Li, Q. Wang and Z. K. Zhao, *Carbohydr. Polym.*, 2009, **78**, 685–689.
- 108 Y. Pierson, X. Chen, F. D. Bobbink, J. Zhang and N. Yan, *ACS Sustainable Chem. Eng.*, 2014, **2**, 2081–2089.
- 109 Q. Chen, W. Xiao, L. Zhou, T. Wu and Y. Wu, *Polym. Degrad. Stab.*, 2012, **97**, 49–53.
- 110 M. Yabushita, H. Kobayashi, K. Kuroki, S. Ito and A. Fukuoka, *ChemSusChem*, 2015, **8**, 3760–3763.
- 111 J. Zhang and N. Yan, *ChemCatChem*, 2017, **9**, 2790–2796.
- 112 J. Zhang and N. Yan, *Green Chem.*, 2016, **18**, 5050–5058.
- 113 G. Gözaydin, S. Song and N. Yan, *Green Chem.*, 2020, **22**, 5096–5104.
- 114 Y. Wang, J. Kou, X. Wang and X. Chen, *Green Chem.*, 2023, **25**, 2596–2607.
- 115 G. Gözaydin, Q. Sun, M. Oh, S. Lee, M. Choi, Y. Liu and N. Yan, *ACS Sustainable Chem. Eng.*, 2023, **11**, 2511–2519.
- 116 H. Zhang, Y. Lu, Y. Wang, X. Zhang and T. Wang, *RSC Adv.*, 2018, **8**, 5608–5613.
- 117 H. Kobayashi, Y. Suzuki, T. Sagawa, M. Saito and A. Fukuoka, *Angew. Chem., Int. Ed.*, 2023, **62**, e202214229.
- 118 E. N. Chebotok, V. Y. Novikov and I. N. Konovalova, *Russ. J. Appl. Chem.*, 2006, **79**, 1162–1166.
- 119 X. Chen, H. Yang, Z. Zhong and N. Yan, *Green Chem.*, 2017, **19**, 2783–2792.
- 120 R. A. Franich, S. J. Goodin and A. L. Wilkins, *J. Anal. Appl. Pyrolysis*, 1984, **7**, 91–100.
- 121 J. Chen, M. Wang and C. T. Ho, *J. Agric. Food Chem.*, 1998, **46**, 3207–3209.
- 122 M. W. Drover, K. W. Omari, J. N. Murphy and F. M. Kerton, *RSC Adv.*, 2012, **2**, 4642–4644.
- 123 K. W. Omari, L. Dodot and F. M. Kerton, *ChemSusChem*, 2012, **5**, 1767–1772.
- 124 X. Chen, S. L. Chew, F. M. Kerton and N. Yan, *Green Chem.*, 2014, **16**, 2204–2212.
- 125 X. Chen, Y. Liu, F. M. Kerton and N. Yan, *RSC Adv.*, 2015, **5**, 20073–20080.
- 126 X. Chen, Y. Gao, L. Wang, H. Chen and N. Yan, *ChemPlusChem*, 2015, **80**, 1565–1572.
- 127 J. Wang, H. Zang, S. Jiao, K. Wang, Z. Shang, H. Li and J. Lou, *Sci. Total Environ.*, 2020, **710**, 136293.
- 128 H. Zang, H. Li, S. Jiao, J. Lou, Y. Du and N. Huang, *ChemistrySelect*, 2021, **6**, 3848–3857.
- 129 Y. Du, H. Zang, Y. Feng, K. Wang, Y. Lv and Z. Liu, *J. Mol. Liq.*, 2022, **347**, 117970.
- 130 Y.-L. Loow, E. K. New, G. H. Yang, L. Y. Ang, L. Y. W. Foo and T. Y. Wu, *Cellulose*, 2017, **24**, 3591–3618.
- 131 K. T. T. Amesho, Y.-C. Lin, S. V. Mohan, S. Halder, V. K. Ponnusamy and S.-R. Jhang, *Environ. Chem. Lett.*, 2023, **21**, 183–230.
- 132 C. Wu, C. Wang, A. Zhang, K. Chen, F. Cao and P. Ouyang, *React. Chem. Eng.*, 2022, **7**, 1742–1749.
- 133 D. Padovan, H. Kobayashi and A. Fukuoka, *ChemSusChem*, 2020, **13**, 3594–3598.
- 134 C. Wang, C. Wu, A. Zhang, K. Chen, F. Cao and P. Ouyang, *ChemistrySelect*, 2022, **7**, e202104574.
- 135 H. Zang, Y. Feng, M. Zhang, K. Wang, Y. Du, Y. Lv, Z. Qin and Y. Xiao, *Carbohydr. Res.*, 2022, **522**, 108679.
- 136 H. Zang, J. Lou, S. Jiao, H. Li, Y. Du and J. Wang, *J. Mol. Liq.*, 2021, **330**, 115667.
- 137 Y. Liu, C. Stähler, J. N. Murphy, B. J. Furlong and F. M. Kerton, *ACS Sustainable Chem. Eng.*, 2017, **5**, 4916–4922.
- 138 T. T. Pham, A. C. Lindsay, S. W. Kim, L. Persello, X. Chen, N. Yan and J. Sperry, *ChemistrySelect*, 2019, **4**, 10097–10099.
- 139 A. D. Sadiq, X. Chen, N. Yan and J. Sperry, *ChemSusChem*, 2018, **11**, 532–535.



- 140 T. T. Pham, G. Gözaydın, T. Söhnle, N. Yan and J. Sperry, *Eur. J. Org. Chem.*, 2019, **2019**, 1355–1360.
- 141 T. T. Pham, X. Chen, T. Söhnle, N. Yan and J. Sperry, *Green Chem.*, 2020, **22**, 1978–1984.
- 142 T. T. Pham, X. Chen, N. Yan and J. Sperry, *Monatsh. Chem.*, 2018, **149**, 857–861.
- 143 H. Yoda, Y. Suzuki and K. Takabe, *Tetrahedron Lett.*, 2004, **45**, 1599–1601.
- 144 R. Kuhn and G. Krüger, *Chem. Ber.*, 1957, **90**, 264–277.
- 145 M. Ogata, T. Hattori, R. Takeuchi and T. Usui, *Carbohydr. Res.*, 2010, **345**, 230–234.
- 146 D. Matsuura, T. Mitsui, T. Sengoku, M. Takahashi and H. Yoda, *Tetrahedron*, 2008, **64**, 11686–11696.
- 147 M. Osada, K. Kikuta, K. Yoshida, K. Totani, M. Ogata and T. Usui, *Green Chem.*, 2013, **15**, 2960–2966.
- 148 M. Osada, K. Kikuta, K. Yoshida, K. Totani, M. Ogata and T. Usui, *RSC Adv.*, 2014, **4**, 33651–33657.
- 149 M. Osada, S. Shoji, S. Suenaga and M. Ogata, *Fuel Process. Technol.*, 2019, **195**, 106154.
- 150 M. Osada, H. Kobayashi, T. Miyazawa, S. Suenaga and M. Ogata, *Int. J. Biol. Macromol.*, 2019, **136**, 994–999.
- 151 X. Gao, X. Chen, J. Zhang, W. Guo, F. Jin and N. Yan, *ACS Sustainable Chem. Eng.*, 2016, **4**, 3912–3920.
- 152 L. Jia, Y. Wang, Y. Qiao, Y. Qi and X. Hou, *RSC Adv.*, 2014, **4**, 44253–44260.
- 153 S. Fujihira, R. Kikuchi and H. Kushida, *J. Org. Chem.*, 1966, **31**, 2239–2241.
- 154 G. Candiano, G. M. Ghiggeri, R. Gusmano, L. Zetta, E. Benfenati and G. Icardi, *Carbohydr. Res.*, 1988, **184**, 67–75.
- 155 J. Rohovec, J. Kotek, J. A. Peters and T. Maschmeyer, *Eur. J. Org. Chem.*, 2001, **2001**, 3899–3901.
- 156 L. Jia, C. M. Pedersen, Y. Qiao, T. Deng, P. Zuo, W. Ge, Z. Qin, X. Hou and Y. Wang, *Phys. Chem. Chem. Phys.*, 2015, **17**, 23173–23182.
- 157 L. Jia, X. Liu, Y. Qiao, C. M. Pedersen, Z. Zhang, H. Ge, Z. Wei, Y. Chen, X. Wen, X. Hou and Y. Wang, *Appl. Catal., B*, 2017, **202**, 420–429.
- 158 L. Jia, Z. Zhang, Y. Qiao, C. M. Pedersen, H. Ge, Z. Wei, T. Deng, J. Ren, X. Liu, Y. Wang and X. Hou, *Ind. Eng. Chem. Res.*, 2017, **56**, 2925–2934.
- 159 M. Wu, H. Ma, Z. Ma, Y. Jin, C. Chen, X. Guo, Y. Qiao, C. M. Pedersen, X. Hou and Y. Wang, *ACS Sustainable Chem. Eng.*, 2018, **6**, 9434–9441.
- 160 A. K. L. Yuen, A. F. Masters and T. Maschmeyer, *Catal. Today*, 2013, **200**, 9–16.
- 161 H. Baniamernian, M. Høj, M. J. Beier and A. D. Jensen, *Appl. Catal., B*, 2023, **330**, 122650.
- 162 J. R. Kadam, T. S. Khan and P. L. Dhepe, *New J. Chem.*, 2023, **47**, 7548–7555.
- 163 X. Pan and D. C. Webster, *ChemSusChem*, 2012, **5**, 419–429.
- 164 S. N. Gunasekara, R. Pan, J. N. Chiu and V. Martin, *Appl. Energy*, 2016, **162**, 1439–1452.
- 165 K. Li, P. H. M. Feron, T. W. Jones, K. Jiang, R. D. Bennett and A. F. Hollenkamp, *Fuel*, 2020, **263**, 116661.
- 166 F. D. Bobbink, J. Zhang, Y. Pierson, X. Chen and N. Yan, *Green Chem.*, 2015, **17**, 1024–1031.
- 167 H. Kobayashi, K. Techikawara and A. Fukuoka, *Green Chem.*, 2017, **19**, 3350–3356.
- 168 K. Techikawara, H. Kobayashi and A. Fukuoka, *ACS Sustainable Chem. Eng.*, 2018, **6**, 12411–12418.
- 169 Y. Zheng, L. Lu, W. Chen, A. Zheng, A. Lei and A. D. Chowdhury, *Catalysts*, 2022, **12**, 460.
- 170 S. Xie, C. Jia, S. S. Go Ong, Z. Wang, M. Jun Zhu, Q. Wang, Y. Yang and H. Lin, *iScience*, 2020, **23**, 101096.
- 171 T. Sagawa, H. Kobayashi, C. Murata, Y. Shichibu, K. Konishi and A. Fukuoka, *ACS Sustainable Chem. Eng.*, 2019, **7**, 14883–14888.
- 172 C. Yang, T. Sagawa, A. Fukuoka and H. Kobayashi, *Green Chem.*, 2021, **23**, 7228–7234.
- 173 T. Sagawa, H. Kobayashi, C. Murata, Y. Shichibu, K. Konishi, M. Hashizume and A. Fukuoka, *Bull. Chem. Soc. Jpn.*, 2022, **95**, 1054–1059.
- 174 R. J. Van Putten, J. C. Van Der Waal, E. De Jong, C. B. Rasrendra, H. J. Heeres and J. G. De Vries, *Chem. Rev.*, 2013, **113**, 1499–1597.
- 175 M. Mascal and E. B. Nikitin, *ChemSusChem*, 2009, **2**, 859–861.
- 176 K. W. Omari, J. E. Besaw and F. M. Kerton, *Green Chem.*, 2012, **14**, 1480–1487.
- 177 S. B. Lee and G. T. Jeong, *Appl. Biochem. Biotechnol.*, 2015, **176**, 1151–1161.
- 178 M. R. Park, H. S. Kim, S. K. Kim and G. T. Jeong, *Fuel Process. Technol.*, 2018, **172**, 115–124.
- 179 H. S. Kim, M. R. Park, S. K. Kim and G. T. Jeong, *Korean J. Chem. Eng.*, 2018, **35**, 1290–1296.
- 180 Y. Wang, C. M. Pedersen, T. Deng, Y. Qiao and X. Hou, *Bioresour. Technol.*, 2013, **143**, 384–390.
- 181 S. Yu, H. Zang, S. Chen, Y. Jiang, B. Yan and B. Cheng, *Polym. Degrad. Stab.*, 2016, **134**, 105–114.
- 182 H. S. Kim, S. K. Kim and G. T. Jeong, *RSC Adv.*, 2018, **8**, 3198–3205.
- 183 H. S. Kim, M. R. Park, Y. J. Jeon, S. K. Kim, Y. K. Hong and G. T. Jeong, *Energy Technol.*, 2018, **6**, 1747–1754.
- 184 M. S. Islam, M. Nakamura, N. N. Rabin, M. A. Rahman, M. Fukuda, Y. Sekine, J. N. Beltramini, Y. Kim and S. Hayami, *RSC Adv.*, 2021, **12**, 406–412.
- 185 N. D. Kalane, R. A. Krishnan, V. D. Yadav, R. Jain and P. Dandekar, *Cellulose*, 2019, **26**, 2805–2819.
- 186 T.-W. Tzeng, P. Bhaumik and P.-W. Chung, *Mol. Catal.*, 2019, **479**, 110627.
- 187 J. Wang, A. Zhu and L. Li, in *Sustainable Catalytic Processes*, ed. B. Saha, M. Fan and J. Wang, Elsevier, 2015, pp. 61–98.
- 188 J. P. Hallett and T. Welton, *Chem. Rev.*, 2011, **111**, 3508–3576.
- 189 M. Watanabe, M. L. Thomas, S. Zhang, K. Ueno, T. Yasuda and K. Dokko, *Chem. Rev.*, 2017, **117**, 7190–7239.
- 190 K. Goossens, K. Lava, C. W. Bielawski and K. Binnemans, *Chem. Rev.*, 2016, **116**, 4643–4807.

- 191 A. Pinkert, K. N. Marsh, S. Pang and M. P. Staiger, *Chem. Rev.*, 2009, **109**, 6712–6728.
- 192 L. Zhou, R. Liang, Z. Ma, T. Wu and Y. Wu, *Bioresour. Technol.*, 2013, **129**, 450–455.
- 193 S. K. Singh and P. L. Dhepe, *Green Chem.*, 2016, **18**, 4098–4108.
- 194 B. M. Matsagar and P. L. Dhepe, *Catal. Sci. Technol.*, 2015, **5**, 531–539.
- 195 J. X. Feng, H. J. Zang, Q. Yan, M. G. Li and B. W. Cheng, *Adv. Mater. Res.*, 2015, **1095**, 411–414.
- 196 M. Li, H. Zang, J. Feng, Q. Yan, N. Yu, X. Shi and B. Cheng, *Polym. Degrad. Stab.*, 2015, **121**, 331–339.
- 197 Y. Jiang, H. Zang, S. Han, B. Yan, S. Yu and B. Cheng, *RSC Adv.*, 2016, **6**, 103774–103781.
- 198 H. Zang, S. Yu, P. Yu, H. Ding, Y. Du, Y. Yang and Y. Zhang, *Carbohydr. Res.*, 2017, **442**, 1–8.
- 199 M. Zhang, H. Zang, B. Ma, X. Zhang, R. Xie and B. Cheng, *ChemistrySelect*, 2017, **2**, 10323–10328.
- 200 B. Girisuta and H. J. Heeres, *Production of Platform Chemicals from Sustainable Resources*, Springer Singapore, Singapore, 2017.
- 201 Á. Szabolcs, M. Molnár, G. Dibó and L. T. Mika, *Green Chem.*, 2013, **15**, 439–445.
- 202 G.-T. Jeong, *Ind. Crops Prod.*, 2014, **62**, 77–83.
- 203 M. R. Park, S. K. Kim and G. T. Jeong, *J. Ind. Eng. Chem.*, 2018, **61**, 119–123.
- 204 M. R. Park, H. S. Kim, S. K. Kim and G. T. Jeong, *Korean Chem. Eng. Res.*, 2018, **56**, 61–65.
- 205 W. Hou, L. Liu and H. Shen, *Carbohydr. Polym.*, 2018, **195**, 267–274.
- 206 W. Hou, Q. Zhao and L. Liu, *Green Chem.*, 2020, **22**, 62–70.
- 207 Q. Zhao and L. Liu, *ACS Sustainable Chem. Eng.*, 2021, **9**, 1762–1771.
- 208 X. Y. Tian, Y. Z. Zheng and Y. C. Zhang, *J. Mol. Liq.*, 2022, **368**, 120735.
- 209 R. Dalirfardouei, G. Karimi and K. Jamialahmadi, *Life Sci.*, 2016, **152**, 21–29.
- 210 J. Zhang, W. Xia, P. Liu, Q. Cheng, T. Tahiri, W. Gu and B. Li, *Mar. Drugs*, 2010, **8**, 1962–1987.
- 211 G. Wen and X. Wen, *J. Carbohydr. Chem.*, 2006, **25**, 297–301.
- 212 M. Tominaga, M. Nagashima and I. Taniguchi, *Electrochem. Commun.*, 2007, **9**, 911–914.
- 213 Y. Ohmi, S. Nishimura and K. Ebitani, *ChemSusChem*, 2013, **6**, 2259–2262.
- 214 J. Dai, G. Gözaydın, C. Hu and N. Yan, *ACS Sustainable Chem. Eng.*, 2019, **7**, 12399–12407.
- 215 J. Wu, M. Qi, G. Gözaydın, N. Yan, Y. Gao and X. Chen, *Ind. Eng. Chem. Res.*, 2021, **60**, 3239–3248.
- 216 K. Kun-asa, P. Reubroycharoen, K. Yamazaki, N. Mimura, O. Sato and A. Yamaguchi, *ChemistryOpen*, 2021, **10**, 308–315.
- 217 B. M. Matsagar, M. K. Munshi, A. A. Kelkar and P. L. Dhepe, *Catal. Sci. Technol.*, 2015, **5**, 5086–5090.
- 218 A. Pandit, C. Deshpande, S. Patil, R. Jain and P. Dandekar, *Carbohydr. Polym.*, 2020, **230**, 115600.
- 219 C. Erb and F. W. Zerban, *Ind. Eng. Chem., Anal. Ed.*, 1938, **10**, 246–250.
- 220 M. Garriga, M. Almaraz and A. Marchiaro, *Actas Ing.*, 2017, **3**, 173–179.
- 221 N. Ghosh and P. L. Dhepe, *Carbohydr. Polym. Technol. Appl.*, 2021, **2**, 100139.
- 222 D. Corradini, *Handbook of HPLC*, CRC Press, Boca Raton, 2nd edn, 2016.