Nanoscale Advances



PAPER

View Article Online
View Journal | View Issue



Cite this: Nanoscale Adv., 2024, 6, 4672

Impact of morphology and oxygen vacancy content in Ni, Fe co-doped ceria for efficient electrocatalyst based water splitting†

Abhaya Kumar Mishra, a Joshua Willoughby, a Shanna L. Estes, b Keliann Cleary Kohler and Kyle S. Brinkman b *a

Designing a highly efficient, low-cost, sustainable electrocatalyst for the hydrogen evolution reaction (HER) and oxygen evolution reaction (OER) through water splitting is a current challenge for renewable energy technologies. This work presents a modified sol-gel route to prepare metal-ion(s) doped cerium oxide nanostructures as an efficient electrocatalyst for overall water splitting. Nickle (Ni) and iron (Fe) codoping impacts the morphology in cerium oxide resulting in 5 nm nanoparticles with a mesoporous-like microstructure. The high level 20 mol% (1:1 ratio) of Ni + Fe bimetal-ion(s) doped CeO_2 shows excellent HER and OER activities compared to the monodoped Fe/Ni and pristine CeO_2 . The co-doped catalysts required a low overpotential of 104 mV and 380 mV for HER and OER, respectively, in 1 M KOH, at a current density of 10 mA cm⁻². The Tafel slopes of 95 mV dec⁻¹ and 65 mV dec⁻¹ were measured for HER and OER with the same representative samples which demonstrated excellent stability even after continuous operation for 20 hours in the alkaline medium. The unique morphology, enhanced oxygen vacancy (O_v) content and the synergistic effects of dopants in CeO_2 play essential roles in enhancing the activities of Ni + Fe doped samples.

Received 15th June 2024 Accepted 22nd July 2024

DOI: 10.1039/d4na00500g

rsc.li/nanoscale-advances

1. Introduction

Renewable energy technologies are required to address worldwide energy demands and environmental pollution issues.1 In this regard, hydrogen fuel generated by electrochemical watersplitting is considered a promising chemical method for energy storage.2-5 The efficiency of water electrolysis relies on the electrochemical activities of two half-reactions: the hydrogen evolution reaction (HER) at the cathode to produce hydrogen; and the oxygen evolution reaction (OER) at the anode to produce oxygen.⁶⁻⁸ It is often found that HER active electrocatalysts are not suited for OER and vice versa due to the complexity of the reaction mechanisms. 9,10 Platinum (Pt)-based cathodes and RuO₂/IrO₂ anodes serve as current benchmarks for HER and OER activity;11,12 however, the high cost and scarcity of these noble metal based electrodes hinder industrial applications. 13-16 Additionally, during water splitting, catalysts can undergo dissolution and redeposition, leading to electrode

In this context, cerium oxide (CeO₂, ceria), a rare earth metal oxide, is an ideal model system to explore the impact of dopants on oxygen vacancy (O_v) content and microstructure. Moreover, the ratio of Ce⁴⁺/Ce³⁺ in CeO₂ controls the ionic/electronic conductivity, and Ov creation.18-21 Increased co-doping of CeO2 nanostructures may introduce a significant number of defects, leading to surface alteration, substantial changes in the local coordination of atoms, and a modified electronic environment, all of which may contribute to regulate work function for optimizing catalyst performance.22,23 It was reported that various bimetal cation(s), such as (Co + Cu), (Cu + Fe), (Cu + Mn), (Cu + Ni), etc., as co-dopants in the CeO₂ nanostructure enhance electrochemical, catalytic, and photocatalytic activity.24-28 Therefore, strategically selecting a combination of metal ions for co-doping into the lattice of CeO2 nanostructures could enhance water-splitting activities.

Traditionally, 3d transition metal cation(s) are employed as co-dopants in HER and OER electrocatalysts because of their suitable ionic size and redox activity.²⁹⁻³¹ Among the various 3d transition metal ions, Ni and Fe are the primary choices as dopants to enhance the electrochemical water splitting activities.³²⁻³⁴ For example, Hai *et al.* found that Ni, Fe co-doped

cross-contamination, which requires increased energy input to maintain desired reaction rates, significantly raising operational expenses.¹⁷ Therefore, cost-effective, efficient, noblemetal-free electrocatalysts for both the HER and OER is a priority need for renewable energy technology.

^aDepartment of Materials Science and Engineering, Clemson University, Clemson, SC 29634, USA. E-mail: ksbrink@clemson.edu

^bDepartment of Environmental Engineering and Earth Sciences, Clemson University, Anderson, SC 29625, USA. E-mail: sestes@clemson.edu

^cAdvanced Materials Research Laboratory (AMRL), Clemson University, Anderson, SC 29625, USA. E-mail: kelliak@clemson.edu

[†] Electronic supplementary information (ESI) available. See DOI: https://doi.org/10.1039/d4na00500g

Paper Nanoscale Advances

W₁₈O₄₉ grown on nickel foam boosted water splitting activities.35 At present, no reports are available on Ni and Fe as codopants in nanostructured CeO2 for bifunctional HER and OER activities. A number of synthesis methods are available for fabrication of Ni, Fe co-doped CeO2, including hydrothermal, coprecipitation, sol-gel, and flame-made. 36-39 Among the above methods, sol-gel synthesis has attracted the most attention because it yields homogenous distribution of dopants. Dopant contents in ceria ranging from 5-30 at% have been achieved using sol-gel synthesis, with maximum Ov achieved for CeO2 doped with 10 at% of Fe.40-42

The present study aims to evaluate the impact of up to 20 mol% Ni, Fe and Ni + Fe co-doping on the electrochemical activity of CeO2 for water splitting. A modified sol-gel method was employed to synthesize pristine, (10 + 10) mol% Ni + Fe, as well as 20 mol% of Ni and Fe metal cation(s) doped CeO2 nanostructure. The novelty of the present work lies in preparing the catalysts without the involvement of a surfactant to control the size and acid/base to adjust the pH. The synthesis method is highly flexible and associated with a single step to introduce a high amount 20 mol% of co-doped cation(s) into the host matrix in the aqueous medium. The absence of impurity phases and uniform distribution of dopant(s) are discussed based on XRD and TEM-HRTEM results. Further, Raman spectroscopy was utilized to quantify the enhanced concentration of Ov in doped catalysts. Finally, the as-synthesised catalysts for HER and OER were evaluated by linear sweep voltammetry (LSV), cyclic voltammetry (CV), potentiostatic impedance (EIS), and chronoamperometry (i-t). The HER and OER activity of assynthesized materials were compared from the overpotential required to achieved current density 10 mA cm⁻², which is equivalent to 10% solar-to-fuel conversion efficiency.43 The present work controlled the size of co-doped CeO₂ into 5 nm nanoparticles with a mesoporous microstructure that exhibits higher HER and OER activities as compared to mono-doped (Ni/ Fe) and pristine CeO₂.

2. Experimental section

2.1. Chemicals

Cerium nitrate hexahydrate Ce(NO₃)₂·6H₂O, nickel(III) acetate hydrate, iron(III) nitrate nonahydrate, ethylene diamine (ED), ethylenediaminetetraacetic acid (EDTA), all from Thermo Scientific; N-methyl-2-pyrrolidone (NMP) from TCI, and nickel foam from MSE Supplies were analytical grade and used without modification.

2.1.1. Synthesis of pristine CeO₂. A simple modified sol-gel route was employed to synthesize pristine CeO₂ nanostructures.44 The water-assisted sol-gel method involved a combination of organic molecules [ethylenediamine tetraacetic acid (EDTA) and ethylenediamine (ED)], and metal precursor salt in the molar ratio of 1:3:1, respectively. The soluble EDTA-ED combination undergoes condensation reactions to form polymeric gel during heating. The EDTA-ED combination and the condensation process entrap dopants and host metal cations in the organic framework via coordinate bonding. Consequently, the metal cation(s) distribute

uniformly, facilitating their incorporation into the doped host lattice during subsequent annealing steps. In brief, 0.292 g of EDTA (1 mmol) was mixed with 25 mL of water in a 200 mL beaker. To the EDTA-water mixture, 200 µL (3 mmol) ED was added with continuous stirring at 300 rpm to obtain a clear solution. Then, the required amount of cerium precursor salt (1) mmol) dissolved in 25 mL of water was added to the EDTA-ED solution drop by drop. The above sol solution was kept at 70 $^{\circ}$ C to form a polymeric-like gel. The above gel was heated at 200 $^{\circ}$ C for 2 h to form a voluminous carbonaceous material, which was finally calcined at 450 °C for 5 h to obtain the desired CeO₂ nanostructure.

2.1.2. Doping of mono- (Ni, Fe) and bi (Ni + Fe)-cation(s) into CeO2. The mono-Ni, Fe, and bi-cation(s) (Ni + Fe) doped CeO₂ nanostructures were prepared using a similar sol-gel method with marginal modification. Based on earlier literature, 20 mol% of Ni + Fe co-doping into CeO₂ was chosen to benefit from the combination effect of dopant, more oxygen vacancy, surface alternation while maintaining the material's structural integrity. To achieve the high level of dopant(s) (20 mol%), the stoichiometric amounts of precursor salts (8:2 (Ce:Fe/Ni) and 8:1:1 (Ce:Ni:Fe)) were dissolved in 25 mL water to give 1 mmol of total cations, i.e., dopant(s) (Ni, Fe)/(Ni + Fe) + host (Ce).

2.2.1. Materials characterization. The as-synthesized materials were analysed in detail to study the structural, morphological, and electrochemical activities. The Rigaku Smart Lab X-ray diffractometer was used to obtain the powder Xray diffraction patterns that used monochromatic Cu Kα (1.5406 Å), 40 kV, radiation, and the data were collected in a 2θ angular range of 10-80. Raman spectra for each dried and ground ceria powder were collected at room temperature using a Renishaw inVia Qontor Raman microscope with a circularly polarized excitation line of 532 nm. The microstructure of pristine and Ni + Fe co-doped CeO₂ catalyst were analysed with transmission electron microscope (TEM) (Hitachi H9500) operating at 300 kV. The HAADF-STEM elemental mapping of Ni + Fe co-doped samples was carried out with (Hitachi SU9000), 30 kV. The surface elemental composition and chemical states of the representative sample were examined using X-ray photoelectron spectroscopy (XPS) with a PHI Versaprobe III, equipped with monochromatic Al K α X-ray radiation source ($h\nu = 1486.6 \text{ eV}$), powered at 25 W and 15 kV. Survey scans used a step size of 0.8 eV, dwell time of 50 ms, and pass energy of 224 eV. High resolution scans were an average of three sweeps, each collected with a step size of 0.125 eV, dwell time of 100 ms, and pass energy of 140 eV.

2.2.2. Electrochemical study. All the electrochemical tests were evaluated using Gamry instruments reference 620 in 1 M aqueous KOH electrolyte. The catalysts modified nickel foam, Pt wires, and saturated calomel electrode (SCE) were used as working, counter, and reference electrodes, respectively, in a conventional three-electrode system. Prior to drop casting, the nickel foam was cleaned in a 3 M HCl to remove the possible oxide, hydroxide impurities on its surface. The electrocatalyst ink was prepared by taking 10 mg of the active catalyst and 1 mg of PVDF as binder in 1 mL of NMP solvent. After the sonication

treatment of 1 h, 200 μ L of the homogeneous the ink was drop cast on to into the washed nickel foam, and dried at 80 °C for 4 h to evaporated the solvent. The HER, OER performance were determined from the LSV data collected in the cathodic and anodic regime. The LSV data were converted into the reversible hydrogen electrode (RHE) scale using the eqn (i)

$$E_{\text{RHE}} = E_{\text{SCE}}^0 + E_{\text{SCE}} + 0.0594 \text{ pH}$$
 (i)

Here $E_{\rm RHE}$ is the potential in RHE scale, $E_{\rm SCE}^0=0.241$ V is the standard potential of SCE, and $E_{\rm SCE}$ is the working potential versus (vs.) SCE. ⁴⁵ The OER overpotential (η_X) required to achieve the current density X (numerical value) mA cm⁻² was calculated from the equation $\eta_X=E$ (versus RHE) -1.23 V. Similarly, EIS spectra were recorded to know the charge transfer phenomenon at the electrode–electrolyte interface by applying DC voltage -0.2 and 1.56 V vs. RHE in the in the frequency range 100 kHz to 0.1 Hz with ac perturbation of 0.01 V. All of the characteristic LSVs data were corrected with 100% of iR compensation by using the EIS data. The iR compensations for HER and OER are stated as⁴⁶

$$E_{\text{correted}} = E_{\text{exp}} - E_{iR} = E_{\text{RHE}} - (I_{\text{mea}} \times R_{\text{s}})$$

Here $E_{\rm corrected}$ represent iR corrected potential, $E_{\rm exp}$ indicates experimentally measured potential, $I_{\rm mea}$ and $R_{\rm s}$ are the measured current and the contact resistance between electrode and solution.

3. Results and discussion

3.1. Structural properties

The crystal structures and different phases of as-synthesized materials were evaluated from the recorded PXRD patterns. Fig. 1a shows the XRD data of 20% of Ni, Fe mono-doped, equimolar Ni + Fe co-doped, and pristine CeO_2 powder samples. The diffraction peaks of the undoped samples are well-matched to the cubic fluorite structure of CeO_2 , indicating that as-synthesized catalysts have no impurities within the detection

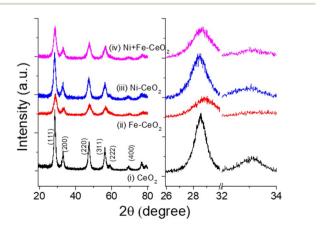


Fig. 1 Powder X-ray patterns of (a) undoped, Ni, Fe doped, and (Ni + Fe) co-doped CeO_2 catalyst. (b) Enlarged view of (111) and (200) facets of the corresponding diffraction patterns.

limits. The observed individual peak positions were indexed according to the reference pattern JCPDS card no. 01-080-6915. No additional peaks were noticed from the doped metal-ion(s) precursor. However, a shift and broadening in the peaks were found by introducing dopants, as evidenced by the magnified (111) and (200) peak positions shown in Fig. 1b. As seen, the increase in full-width at half maximum (FWHM) with the addition of Ni/Fe and Ni + Fe heteroatom (s) may be due to uniform doping, resulting in a reduction in the coherence of crystalline regions which is also reflected in high-resolution TEM images (Fig. 3f). It is expected that metal cation(s) Ni²⁺ (0.69 A)47 and Fe3+ (0.79 A)48 introduction into the CeO2 to replace higher oxidation state Ce4+ would results in an significant change in the two theta value resulting from lattice contraction/extension.49 However, insignificant change in the lattice parameter were observed owing to change in the ratio of Ce³⁺ to Ce⁴⁺ along with creation of O_v. Table 1 highlights the physicochemical properties of the catalysts.

3.2 Raman analysis

Raman spectroscopy analysis of the catalysts was carried out to understand the effect of doping into the CeO2 lattice framework. Fig. 2a displays the Raman spectra of undoped, mono, and co-doped CeO₂ samples. The Raman spectra of pure CeO₂ samples show a band at 462 cm⁻¹ corresponding to a triply degenerate symmetrical stretching band (F2g) of CeO2 fluorite structure.50 A significant shift towards higher wavenumber along with broadening was noticed for F2g bands for the other samples, indicating the doping of metal ion(s) into the CeO2 lattice unit, in agreement with the observed XRD results (Fig. 1b).51,52 Changes in the intensity and frequency of F_{2g} bands evidence the interaction between dopant(s) and host CeO₂ In addition, a small defect induced band (D) at 602 cm⁻¹ was observed, which is due to Raman selection rules associated with defects of CeO2, particularly oxygen vacancies. 49,53 In the CeO₂ structure, Ce ions exist in either 3+ or 4+ oxidation states therefore the introduction of aliovalent ion(s), such as Ni²⁺ and Fe³⁺, leads to symmetry breaking. As a result, to maintain the charge neutrality in the ionic crystal, a larger size of Ce³⁺ and an oxygen vacancy are formed.54 The ratio of D and F2g band intensities (I_D and I_{F2g} respectively) were utilized to estimate the oxygen vacancy concentration. The values of $I_d/I_{F_{2\sigma}}$ of the assynthesized catalysts follow the trends Ni + Fe-CeO₂ > Ni-CeO₂ > Fe-CeO₂ > CeO₂. It is seen that the Ni + Fe co-dopant generates more oxygen vacancies than Ni and Fe mono-doped CeO2 at the same 20 mol% doping level. The optimal Fe content (10 mol%) in Ni + Fe doped CeO2 may exhibits charge compensation mechanism, which involve extrinsic and intrinsic point defects.55 Kroger-Vink notation is adopted to describe the process shown below:56

$$Fe_2O_3 + CeO_2 \rightarrow 2Fe'_{Ce} + V_O^{"} + O_O^{\times}$$
 (ii)

$$O_{O}^{\times} + 2Ce_{Ce}^{\times} \rightarrow 2Ce_{Ce}^{'} + 1/2O_{2} + V_{O}^{*}$$
 (iii)

Here, (ii) and (iii) represents extrinsic and intrinsic oxygen vacancies formation reactions respectively. In the above

 Table 1
 Physicochemical properties of the catalysts

Catalysts	Unit cell side length (A)	CeO_2 crystallite size ^a (nm)	CeO_2 particle size b (nm)
CeO ₂	5.419	7.97	10
Ni-CeO ₂	5.418	5.70	_
Fe-CeO ₂	5.409	4.16	_
Ni + Fe-CeO ₂	5.408	4.79	5
^a XRD results at plane (2	111) 28.5 (2 theta). ^b TEM analysis.		

(ii) CeO₂
(iii) Fe-CeO₂
(iii) Ni-CeO₂
(iv) Ni+Fe-CeO₂
(iv) Ni+Fe-CeO₂
(iv) 0.58
(ii) 0.58
(i) 0.06

Raman Shift (cm⁻¹)

Fig. 2 Raman spectra of as-synthesized materials.

equation $\operatorname{Ce}_{\operatorname{Ce}}^{\times}$, and $\operatorname{Ce}_{\operatorname{Ce}}^{'}$ are the $\operatorname{Ce}^{4^{+}}$, and $\operatorname{Ce}^{3^{+}}$ on cerium lattice sites of CeO_2 , $\operatorname{O}_{\operatorname{O}}^{\times}$ is the $\operatorname{O}^{2^{-}}$ ion on oxygen lattice sites, and V_{O}^{*} represents the formation of oxygen vacancy in CeO_2 release two free electron. However, higher levels of Fe dopants in excess of 10 mol% may result in an interstitial compensation mechanism. 57,58

$$2Fe_2O_3 + CeO_2 \rightarrow 3Fe'_{Ce} + Fe'_i + 6O_0^{\times}$$
 (iv)

In this scenario, three Fe³⁺ ions substitute four Ce⁴⁺ with charge neutrality accomplished by Fe³⁺ in the interstitial sites of the fluorite cubic sites of CeO₂. ⁵⁹ Overall, this resulted in a decreased O_v content with higher doping of Fe³⁺ in doped CeO₂ nanocrystals. ⁶⁰⁻⁶³ For example, Bao *et al.* reported that doping at 10% Fe resulted in elevated O_v vacancy content which become almost zero at higher doping levels near 50 at% Fe. ⁶⁴

3.3. Microstructure

The microstructural features of the representative pristine CeO_2 and Ni + Fe-CeO₂ co-doped materials were evaluated by bright field TEM and HR-TEM images. Fig. 3(a and b) represents the TEM images of the pristine CeO_2 . As seen, pure CeO_2 (Fig. 3a) exhibits a nanosheet-like morphology. Moreover, the magnified TEM images (Fig. 3b) confirmed that uniform nanoparticles with an average size of 10 nm were integrated to form the abovementioned architecture. The high-resolution TEM images were collected from the region highlighted as green circles in the corresponding magnified TEM (Fig. 3c). The interplanar distance (d) value of 0.30 nm confirmed that the (111) facet of

the CeO2 nanosheet is highly exposed, which is also seen as a highly intense peak in XRD patterns. It is seen in Fig. 3d that Ni + Fe-CeO₂ exhibits mesopores like features. The average particle size of Ni + Fe doped samples were found to of 4-5 nm (Fig. 3e), which is half of the pristine CeO₂. This observation indicates that the doping-induced change in the morphology of the pristine CeO₂ nanosheet. Kumar et al. also reported the synthesis of similar mesoporous cerium oxide (CeO2) nanostructures by macroalgae polymer mediated approach.65 The short-range lattice arrangement evident from the HRTEM images shown in the Fig. 3f. In the HRTEM images coherence of crystalline regions are marked by dotted circles. The selected area electron diffraction (SAED) pattern shown as inset in Fig. 3f also support the single-phase nature of the Ni + Fe co-doped CeO₂ mesoporous structure. This suggests the presence of Ni²⁺, and Fe³⁺ cation(s) as co-dopants has an impact on in the coherence of crystalline regions of doped CeO2 nanocrystals. The dramatic decreasing in the particle sizes offer more available sites for electrode/electrolyte interactions leading to higher electrochemical activities.

The elemental mapping from high-angle annular dark-field scanning TEM (HAADF-STEM) of Ni + Fe-CeO₂ samples is shown in Fig. 4. The analysis clearly indicates uniform distribution of Ni, Fe, Ce and O in mesoporous CeO₂. Therefore, the Ni + Fe-CeO₂ co-doped catalyst with 20 mol% at 1:1 ratio of dopant(s) may affiliate with multiple bonding environments such as Ce-Fe-O, Ce-Ni-O, and Ce-Fe-Ni-O. These changes in the local atomic arrangement results in favourable sites for the multistep electrochemical water splitting reaction.

3.4. X-ray photoelectron spectroscopy

XPS analysis was carried out to investigate the surface composition and chemical states of the CeO_2 nanosheet. The survey spectrum from XPS shown in Fig. S1† confirmed the presence of Ce, O, and carbon C. The region XPS spectra for Ce 3d, O 1s, are shown in Fig. 5a–c. The deconvoluted Ce 3d spectra in Fig. 5a shows multiplet peaks arising from the spin orbit coupling of Ce $3d_{5/2}$ and Ce $3d_{3/2}$ core level, respectively. ⁶⁶ The peaks in the high binding energy (BE) range 880–900 eV are ascribed to Ce $3d_{5/2}$ and the peak located in the range 900–920 correspond to Ce $3d_{3/2}$. ⁶⁷ The prominent photoelectron features at BE of 882.5, 888.9, and 898.1 eV signifies $3d_{5/2}$ for Ce^{4+} , while that at 901.1, 907.6, and 916.7 eV correspond to $3d_{3/2}$ level of Ce^{4+} . ⁶⁸ Similarly, the doublets at BE 880.9 and 885.2 eV is assigned to the Ce^{3+} $3d_{5/2}$ level, while the peaks at 899.4 and 903.6 eV are correspond

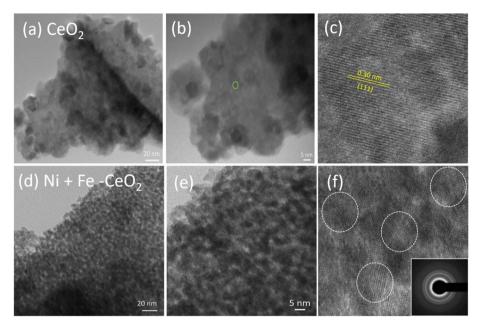


Fig. 3 TEM and HRTEM images of (a-c) pristine CeO₂, (d-f) 20 mol% Ni + Fe at 1:1 ratio doped CeO₂.

to Ce^{3+} $3d_{3/2}$.⁶⁹ This indicated the presence of Ce^{3+} , and Ce^{4+} , oxidation sate in CeO_2 . The corresponding O 1s spectra is displayed in Fig. 5b. The feature of O 1s showing peaks different binding energy due to different electronic environment. Experiments on doped and co-doped samples showed minimal impact on the shape or intensity of the XPS signal of the Ce 3d bands.⁴⁰ The Ni 2p and Fe 3p region XPS spectra of Fe and Ni dopant in the Ni + Fe co-doped CeO_2 sample are shown in Fig. S2.† The fitting peak of Ni 2p at 855.1 eV and 856.2 eV (Fig. S2a†) are attributed to +2 and +3 state of Ni. Strong satellite peak of Ni at 861.2 eV was also observed.⁷⁰ The peaks at 55.4 eV and 56.7 eV (Fig. S2b†) in Fe 3p correspond to +3 and valence +4 oxidation states.⁷¹ The XPS analysis confirmed the presence of high valence Fe⁴⁺ and Ni³⁺ ions in co-doped samples crucial for achieving superior electrocatalytic water splitting activity.

3.5 Electrochemical activities

The impact of 20 mol% Ni/Fe and (Ni + Fe) at 1:1 dopant-(s) in CeO_2 on the electrochemical activity were examined by a range of tests including LSV, i–t, CV, and EIS. All the tests were carried out in a three-electrode configuration under identical test conditions with 1 M KOH aqueous solution as the electrolyte. It is noted that the LSVs data were recorded at a slow sweep rate of 1 mV s⁻¹ to minimize the capacitive current.⁷² Fig. 6a displays the HER-LSV curves of all doped and pristine CeO_2 along with bare nickel foam for comparison.

As seen from Fig. 6a, the bare nickel foam exhibits a high overpotential of (270 mV νs . RHE) to achieve (10 mA cm $^{-2}$) current density, indicating the minor contribution for HER activities. The sharp distinctions of LSV curves with higher cathodic current densities for Ni, Fe, and Ni + Fe dopant(s) in CeO₂ nanocrystal suggest the importance of employing

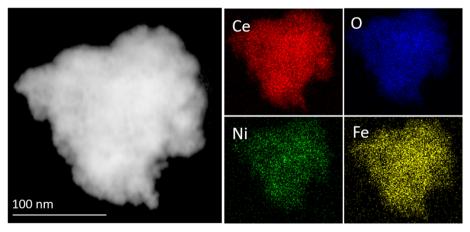


Fig. 4 HAADF-STEM image, and elemental mapping showing Ce, O, Ni, and Fe in CeO₂ mesoporous.

Paper Nanoscale Advances

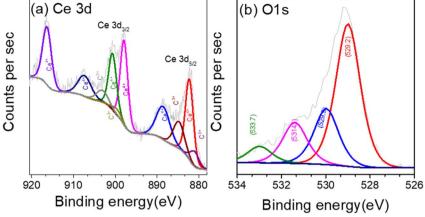


Fig. 5 (a) Region XPS spectra of CeO₂ nanoparticles (a) Ce 3d (b) O 1s.

a catalyst on the bare nickel foam. CeO₂, Ni, Fe, Ni + Fe doped(s) exhibited overpotentials of 198 mV, 123 mV, 157 mV, and 104 mV respectively at the 10 mA cm⁻² current density associated with optimized solar to fuel conversion efficiency. The lower overpotential and higher current density of Ni + Fe doped CeO₂ catalyst compared to the other prepared electrodes as well as literature (Table 2) suggest superior HER activity. The excellent HER activities of the Ni + Fe CeO2 electrode are ascribed to the unique mesoporous morphology that creates more active sites and greater O_v point defect concentration.


The HER kinetics and the reaction mechanism observed at the electrode surface were measured by the Tafel slope. 82 Fig. 6b exhibits the Tafel plots, and the Tafel slope of the samples are obtained from the linear fit of potential versus $\log |i|$. The codoped CeO2 electrocatalyst exhibits considerably smallest Tafel value (93 mV dec⁻¹), whereas the pristine CeO₂ show higher Tafel value (150 mV dec⁻¹) among all synthesized materials. The Tafel slope value of the Ni/Fe doped electrodes were found to 120/132 mV dec⁻¹. A smaller Tafel slope reflects a kinetically favoured electrode reaction and higher HER activities. The HER histograms of Tafel slope and overpotential η_{10} (Fig. S3a†) for all electrodes suggest that it follows the Volmer-Heyrovsky mechanism in the alkaline medium as following steps.83

Volmer steps:
$$H_2O + e^- \rightarrow OH^- + H_{ads}$$

Heyrovsky step:
$$H_2O + e^- + H_{ads} \rightarrow OH^- + H_2$$

The Volmer step in an alkaline medium involves water reduction to adsorbed H (Hads) on active catalyst sites, while the Heyrovsky step corresponds to the desorption of Hads to generate a hydrogen molecule. In the Volmer-Heyrovsky mechanism, the Tafel slope value of 118 mV dec⁻¹ suggests the Volmer step is the rate-determined step (RDS), while 40 mV dec-1 represents the Heyrovsky step as RDS.84 The observed HER Tafel slope value 93 mV dec⁻¹ of Ni + Fe co-doped CeO₂ mesoporous catalyst suggests that it follows the Volmer-Heyrovsky mechanism, with the Volmer step being the RDS.

The long-term stability test of the electrodes is an important parameter for industrial application. The stability tests of Ni + Fe-CeO₂ (best HER performance electrocatalyst) was evaluated by conducting chronoamperometry test (Fig. 6c) at the overpotential of 104 mV vs. RHE, and 180 mV vs. RHE, respectively for 20 h. It is to be observed that an insubstantial change in current density 2.27%, and 2.38% at 104 mV, and 180 mV, were found even after 20 h of prolonged continuous operation.

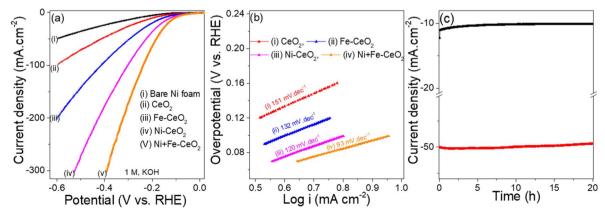

(a) HER LSV curves (b) Tafel slope for HER, (c) HER i-t tests.

Table 2 Comparison of HER and OER electrochemical parameters in CeO₂ based electrocatalysts

	HER		OER			
Active materials	Overpotential (mV)	Tafel slope (mV dec ⁻¹)	Overpotential (mV)	Tafel slope (mV dec ⁻¹)	Ref.	
CeO ₂ /Ce(OH) ₂	317	140	410	66	73	
CeO ₂ -NiSe ₂	130	115	_	_	74	
gC ₃ N ₄ /CeO ₂ /Fe ₃ O ₄	310	102	400	74	75	
Gd-CeO ₂	99	183	369	211	76	
Cu supported Ni-P/CeO ₂	118	122	_	_	77	
20% GDP-PBC	_	_	420	79	78	
CeO ₂ /Ni/NC	320	150	390	123	79	
Mo ₂ C/CeO ₂ /NC	220	123			80	
CeO ₂ /Co@NCH	520	145	479	149	81	
20% Ni + Fe-CeO ₂	104	93	380	65	This work	

The improvement of HER in co-doped CeO_2 nanostructure can be attributed to (i) The unique mesopores formed with 20 mol% of Ni + Fe at 1:1 dopant(s) (Fig. 2c and d) results in an increased number of active sites for electrode/electrolyte interaction (ii) surface alteration, changes in the local coordination of atoms along with the formation of O_v enhances the adsorption and desorption of the intermediates during the electrolysis and (iii) Ni, Fe bimetal cation(s) with different oxidation states and atomic size impact the local conductivity and charge density, resulting in faster charge transfer.⁸⁵

Similarly, the OER activities of as-synthesized electrodes were measured in the same three electrode configuration under 1 M KOH electrolyte solution. The LSV plots representing OER are collected at a scan rate of 1 mV s $^{-1}$ and display in the Fig. 7a. The overpotential required to achieve a current density of 10 mA cm $^{-2}$ follows the sequence of Ni + Fe co-doped (380 mV) < FeCeO $_2$ (420 mV) < Ni-CeO $_2$ (450 mV) < CeO $_2$ (470 mV), respectively. Among the examined electrodes, the Ni + Fe-CeO $_2$ sample shows notably low overpotential 380 mV at a current density of 10 mA cm $^{-2}$, and the result is comparable to overpotentials required for other CeO $_2$ based electrocatalysts such as Ru/CeO $_2$ (420 mV), 86 CeO $_2$ /Co@N-doped carbon (474 mV), 87 and CeO $_2$ /CuO (410 mV). 88 The Ni + Fe co-dopant in other catalysts

systems has demonstrated an increase in the OER activity. For examples, Tuo et al. found from DFT modelling efforts that Ni + Fe co-doped CoSe₂ shows a higher OER rate than Fe, Ni monodoped catalyst.89 Recently Paladugu et al. demonstrated that 50% rare earth cation substitution for Ce in CeO2 created oxygen vacancies in the host lattices resulting in a decrease in the adsorption energy of the OH intermediate in OER.90 Yu et al. reported that CeO2-x-FeNi catalysts showed a higher OER performance than CeO_{2-r}-Ni and CeO₂-FeNi due to formation higher valence Ni cations in the Ni, Fe doped system.91 Tafel plots for all samples were collected to quantify the reaction kinetics as shown in the Fig. 7b. The Tafel slope found for Ni + Fe-CeO₂ was 65 mV dec⁻¹ which is lower than those Fe-CeO₂ (85 mV dec^{-1}), Ni-CeO₂ (98 mV dec^{-1}), and pristine CeO₂ (168 mV dec⁻¹), respectively. The histograms of Tafel slope and overpotential η_{10} (Fig. S3b†) show lower overpotential (η_{10}) and faster kinetics for 20 mol% Ni + Fe co-doped mesoporous CeO₂, indicating superior OER performance. The OER activities were also comparable to other doped CeO₂ based system listed in the Table 2. The Fig. 7c show the i-t results of Ni + Fe doped samples performed at 1.6 V and 1.7 V, respectively. After 20 h chronoamperometry measurement, a small change in current density was observed for both applied constant potential

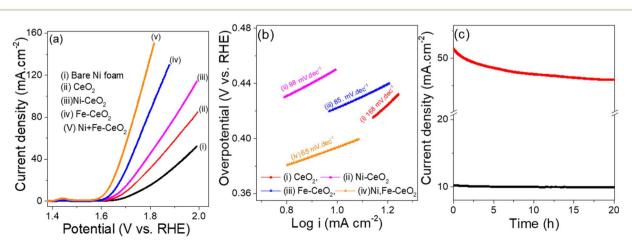


Fig. 7 (a) OER LSV curves (b) Tafel slope for OER, (c) OER i-t tests.

indicating excellent stability for this composition. Furthermore, the microstructure of the Ni + Fe co-doped CeO_2 sample was investigated by TEM after the i-t tests carried out under HER and OER conditions for 20 hours at 10 mA cm $^{-2}$ and 50 mA cm $^{-2}$, respectively. The mesoporous like structure of Ni + Fe codoped CeO_2 samples (Fig. S4†) was found to be remain similar to the original material (Fig. 3d) suggesting high stability of the electrode catalyst.

To understand the higher HER and OER activities of Ni + Fe doped CeO_2 mesopores electrode, the electrochemically active surface area (EASA) depicting active sites for all catalysts was measured. The EASA was estimated by the formula $(v)^{92}$

$$EASA = C_{dl}/C_s; (v)$$

 $C_{\rm s}$ is the specific electrochemical double-layer capacitance of an atomically smooth planer surface. The value of $C_{\rm s}$ varies between 0.020 and 0.060 mF cm $^{-2}$ in an alkaline medium, and here is taken as 0.04 mF cm $^{-2}$. 43 $C_{\rm dl}$, is the electrochemical double-layer capacitance, and the value of $C_{\rm dl}$ is obtained from the slope of the current density vs. scan rate obtained from CV plots collected in the non-faradic region (1.14–1.22 V vs. RHE) at various scan rates. 93 Fig. 8a and S5 † show the CV plots of Ni + Fe doped CeO $_{\rm 2}$ and other electrode catalysts collected at different scan rates. The current density vs. scan rates produces a straight

line, and linear fit gives the slope value equal to $C_{\rm dl}$ (Fig. 8b). The calculated values of EASA for all catalysts are presented in Table 3. The EASA value of Ni + Fe doped sample was 60.8 cm², which was highest among all the electrodes. The observation revealed that more active sites for mesopores feature were available for the electrochemical reaction, leading to superior HER and OER performance.

The charge transfers phenomenon occurring at the electrode/electrolyte interface is a key parameter to analyze the electrocatalytic performance of as-synthesized materials. The potentiostatic EIS analysis were performed in the frequency range 100 kHz to 0.1 Hz at the initial DC voltage -0.2 V vs. RHE and 1.56 V vs. RHE for HER and OER studies, respectively. The Nyquist plot depicted in the Fig. 8(c and d) consist of a small semicircle at high frequency regime (catalyst/nickel foam and between catalyst, Rct1) and larger semicircle at low frequency regime (interface of electrode and electrolyte, R_{ct2}) at the applied DC voltage.17 The value of Rct2 at HER and OER kinetic for all the electrodes are generated by fitting the Nyquist plots with the equivalent circuit shown as inset in the Fig. 8c and d. The co-doped CeO₂ have smallest $R_{\rm ct2}$ 2.9 Ω cm⁻² and 3.5 Ω cm⁻² (Table 3) at HER and OER condition, suggesting faster charge-transfer and consequently a superior electrocatalytic performance for HER, and OER. The higher HER and OER

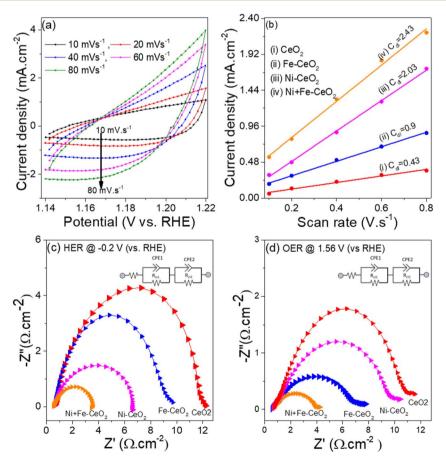


Fig. 8 (a) CV curves of Ni + Fe doped CeO_2 collected at different scan rates in non-faradic region (b) current density vs. scan rates (c) and (d) Nyquist plots of the synthesized materials at HER and OER. The inset in (c) and (d) represent the equivalent circuit diagram to fit the EIS data.

Table 3 The electrochemical activities of as-synthesized catalysts

Evaluated electrochemical proper	ties such as n_{10} EASA. R_c	.+
----------------------------------	-----------------------------------	----

Catalysts	HER $(\eta_{10})^a$ (mV)	OER $(\eta_{10})^a$ (mV)	EASA (cm ²)	$R_{\rm ct} \left(\Omega \ {\rm cm}^{-2}\right)$ for HER	$R_{\rm ct}$ (Ω cm ⁻²) for OER
CeO_2	198	470	10.6	11.5	10.7
Ni-CeO ₂	123	450	50.7	6.0	9.6
Fe-CeO ₂	157	420	22.5	9.1	6.9
Ni + Fe-CeO ₂	104	380	60.8	2.9	3.5
^a Reported in mV	vs. RHE.				

activities of Ni + Fe CeO₂ electrode compared to other prepared catalyst as well as literature suggest that co doped Ni, Fe could be a promising material to fulfil the future energy demand.

4. Conclusions

In summary, a sol-gel route was used to prepare pristine CeO₂ and 20 mol% metal cation(s) Ni + Fe, Ni, and Fe doped CeO₂ electrocatalysts. The presence of Ni + Fe co-dopant(s) altered the growth of CeO₂ resulting in a mesoporous structure with greater number of electrochemically active sites. Co-doped samples were also associated with greater concentration of Ov, a favourable condition for electrochemical water splitting reaction. The Ni + Fe co-doped CeO2 electrode demonstrated superior HER and OER bifunctional activities in 1 M KOH electrolytes and required only 104 mV and 380 mV overpotentials for HER and OER to afford a current density of 10 mA cm⁻². The higher HER, and OER activities were the result of high electrochemical surface area (60.8) cm² and low charge transfer resistance. This work illustrates the impact of Ni, Fe codoping on the microstructure and point defect (oxygen vacancy) as a tool for materials design of electrocatalyst based hydrogen production.

Data availability

Data included as part of the article ESI.† Additional data available upon reasonable request.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

The authors acknowledge support of the Center for Hierarchical Waste Form Materials, an Energy Frontier Research Center funded by the U.S. Department of Energy, Office of Science, Basic Energy Sciences (DE-SC0016574). A portion of this research using Raman spectroscopy was performed using funding received from the DOE Office of Nuclear Energy's Nuclear Energy University Program under Award Number DE-NE0009314.

References

- 1 M. S. Dresselhaus and I. L. Thomas, *Nature*, 2001, **414**, 332–337.
- 2 Z. W. Seh, J. Kibsgaard, C. F. Dickens, I. Chorkendorff, J. K. Nørskov and T. F. Jaramillo, *Science*, 2017, 355, 1–12.
- 3 J. Jiang, F. Sun, S. Zhou, W. Hu, H. Zhang, J. Dong, Z. Jiang, J. Zhao, J. Li, W. Yan and M. Wang, *Nat. Commun.*, 2018, 9, 2885.
- 4 H. Sun, X. Xu, H. Kim, W. Jung, W. Zhou and Z. Shao, *Energy Environ. Mater.*, 2023, **6**, e12441.
- 5 Y. Liu, X. Wang, M. Yang, Y. Li, Y. Xiao and J. Zhao, Nanoscale, 2023, 15, 17936–17945.
- 6 H. Sun, X. Xu, Y. Song, W. Zhou and Z. Shao, Adv. Funct. Mater., 2021, 31, 2009779.
- 7 J. Wang, Y. Gao, H. Kong, J. Kim, S. Choi, F. Ciucci, Y. Hao, S. Yang, Z. Shao and J. Lim, *Chem. Soc. Rev.*, 2020, 49, 9154–9196.
- 8 C. Wei, R. R. Rao, J. Peng, B. Huang, I. E. L. Stephens, M. Risch, Z. J. Xu and Y. Shao-Horn, *Adv. Mater.*, 2019, 31, 1806296.
- R. Bose, V. R. Jothi, K. Karuppasamy, A. Alfantazi and S. C. Yi,
 J. Mater. Chem. A, 2020, 8, 13795–13805.
- 10 B. You and Y. Sun, Acc. Chem. Res., 2018, 51, 1571-1580.
- 11 Y. Li, Y. Sun, Y. Qin, W. Zhang, L. Wang, M. Luo, H. Yang and S. Guo, *Adv. Energy Mater.*, 2020, **10**, 1903120.
- 12 H.-J. Liu, R.-N. Luan, L.-Y. Li, R.-Q. Lv, Y.-M. Chai and B. Dong, *Chem. Eng. J.*, 2023, **461**, 141714.
- 13 Q. Shi, C. Zhu, D. Du and Y. Lin, *Chem. Soc. Rev.*, 2019, **48**, 3181–3192.
- 14 P. Zhai, Y. Zhang, Y. Wu, J. Gao, B. Zhang, S. Cao, Y. Zhang, Z. Li, L. Sun and J. Hou, *Nat. Commun.*, 2020, 11, 5462.
- 15 L. Ji, J. Wang, X. Teng, T. J. Meyer and Z. Chen, ACS Catal., 2020, 10, 412–419.
- 16 X. Hu, Y. Gao, X. Luo, J. Xiong, P. Chen and B. Wang, Nanoscale, 2024, 16, 4909–4918.
- 17 L. Li, B. Wang, G. Zhang, G. Yang, T. Yang, S. Yang and S. Yang, *Adv. Energy Mater.*, 2020, **10**, 2001600.
- 18 D. R. Ou, T. Mori, H. Togasaki, M. Takahashi, F. Ye and J. Drennan, *Langmuir*, 2011, 27, 3859–3866.
- 19 N. Maheswari and G. Muralidharan, *Dalton Trans.*, 2016, 45, 14352–14362.
- 20 H. T. Das, E. B. T, S. Dutta, N. Das, P. Das, A. Mondal and M. Imran, J. Energy Storage, 2022, 50, 104643.

Paper

21 B. Wang, B. Zhu, S. Yun, W. Zhang, C. Xia, M. Afzal, Y. Cai, Y. Liu, Y. Wang and H. Wang, NPG Asia Mater., 2019, 11, 51.

- 22 J. Y. Cheon, J. H. Kim, J. H. Kim, K. C. Goddeti, J. Y. Park and S. H. Joo, J. Am. Chem. Soc., 2014, 136, 8875-8878.
- 23 Z. Chen, T. Ma, W. Wei, W.-Y. Wong, C. Zhao and B.-J. Ni, Adv. Mater., 2024, 2401568.
- 24 Z.-H. Yang, S. Ren, Y. Zhuo, R. Yuan and Y.-Q. Chai, Anal. Chem., 2017, 89, 13349-13356.
- 25 K. Cui, C. Zhou, B. Zhang, L. Zhang, Y. Liu, S. Hao, X. Tang, Y. Huang and J. Yu, ACS Appl. Mater. Interfaces, 2021, 13, 33937-33947.
- 26 Y.-H. Zhou, S. Wang, Y. Wan, J. Liang, Y. Chen, S. Luo and C. Yong, J. Alloys Compd., 2017, 728, 902-909.
- 27 M. Zhu, Y. Wen, L. Shi, Z. Tan, Y. Shen, K. Yin and L. Sun, Nanoscale, 2022, 14, 11963-11971.
- 28 H. Qi, C. Shi, X. Jiang, M. Teng, Z. Sun, Z. Huang, D. Pan, S. Liu and Z. Guo, Nanoscale, 2020, 12, 19112-19120.
- 29 Y. Wang, C. Meng, L. Zhao, J. Zhang, X. Chen and Y. Zhou, Chem. Commun., 2023, 59, 8644-8659.
- 30 D. A. Rakov, Energy Adv., 2023, 2, 235-251.
- 31 R. Wu, J. Xu, C.-L. Zhao, X.-Z. Su, X.-L. Zhang, Y.-R. Zheng, F.-Y. Yang, X.-S. Zheng, J.-F. Zhu, J. Luo, W.-X. Li, M.-R. Gao and S.-H. Yu, Nat. Commun., 2023, 14, 2306.
- 32 C.-F. Li, J.-W. Zhao, L.-J. Xie, J.-Q. Wu and G.-R. Li, Appl. Catal., B, 2021, 291, 119987.
- 33 W. Liu, P. Geng, S. Li, W. Liu, D. Fan, H. Lu, Z. Lu and Y. Liu, J. Energy Chem., 2021, 55, 17-24.
- 34 R.-Y. Fan, J.-Y. Xie, H.-J. Liu, H.-Y. Wang, M.-X. Li, N. Yu, R.-N. Luan, Y.-M. Chai and B. Dong, Chem. Eng. J., 2022, 431, 134040.
- 35 G. Hai, J. Huang, L. Cao, K. Kajiyoshi, L. Wang, L. Feng, Y. Liu and L. Pan, Dalton Trans., 2021, 50, 11604-11609.
- 36 N. Qadeer, N. Jabeen, L. U. Khan, M. Sohail, M. Zaheer, M. Vaqas, A. Kanwal, F. Sajid, S. Qamar and Z. Akhter, RSC Adv., 2022, 12, 15564-15574.
- 37 S. Colis, A. Bouaine, G. Schmerber, C. Ulhaq-Bouillet, A. Dinia, S. Choua and P. Turek, Phys. Chem. Chem. Phys., 2012, 14, 7256-7263.
- 38 V. D. Araújo, W. Avansi, H. B. de Carvalho, M. L. Moreira, E. Longo, C. Ribeiro and M. I. B. Bernardi, CrystEngComm, 2012, 14, 1150-1154.
- 39 P. Tamizhdurai, S. Sakthinathan, S.-M. Chen, K. Shanthi, S. Sivasanker and P. Sangeetha, Sci. Rep., 2017, 7, 46372.
- 40 K. Polychronopoulou, A. A. AlKhoori, A. M. Efstathiou, M. A. Jaoude, C. M. Damaskinos, M. A. Baker, A. Almutawa, D. H. Anjum, M. A. Vasiliades, A. Belabbes, L. F. Vega, A. F. Zedan and S. J. Hinder, ACS Appl. Mater. Interfaces, 2021, 13, 22391-22415.
- 41 P. Venkataswamy, D. Jampaiah, A. E. Kandjani, Y. M. Sabri, B. M. Reddy and M. Vithal, Res. Chem. Intermed., 2018, 44, 2523-2543.
- 42 W. Zhan, S. Yang, P. Zhang, Y. Guo, G. Lu, M. F. Chisholm and S. Dai, Chem. Mater., 2017, 29, 7323-7329.
- 43 C. C. L. McCrory, S. Jung, J. C. Peters and T. F. Jaramillo, J. Am. Chem. Soc., 2013, 135, 16977.

- 44 T. Mathew, K. Sivaranjani, E. S. Gnanakumar, Y. Yamada, T. Kobayashi and C. S. Gopinath, J. Mater. Chem., 2012, 22, 13484-13493.
- 45 S. Niu, S. Li, Y. Du, X. Han and P. Xu, ACS Energy Lett., 2020, 5, 1083-1087.
- 46 Y. Wang, G. Qian, Q. Xu, H. Zhang, F. Shen, L. Luo and S. Yin, Appl. Catal., B, 2021, 286, 119881.
- 47 M. Xiao, D. Han, X. Yang, N. Tsona Tchinda, L. Du, Y. Guo, Y. Wei, X. Yu and M. Ge, Appl. Catal., B, 2023, 323, 122173.
- 48 X. Mei, X. Zhao, Y. Chen, B. Deng, Q. Geng, Y. Cao, Y. Li and F. Dong, ACS Sustain. Chem. Eng., 2023, 11, 15609-15619.
- 49 X. Xu, L. Liu, Y. Tong, X. Fang, J. Xu, D. Jiang and X. Wang, ACS Catal., 2021, 11, 5762-5775.
- 50 B. Liu, B. Liu, Q. Li, Z. Li, M. Yao, R. Liu, X. Zou, H. Lv, W. Wu, W. Cui, Z. Liu, D. Li, B. Zou, T. Cui and G. Zou, Phys. Status Solidi, 2011, 248, 1154-1157.
- 51 R. Murugan, G. Ravi, G. Vijayaprasath, S. Rajendran, M. Thaiyan, M. Nallappan, M. Gopalan and Y. Hayakawa, Phys. Chem. Chem. Phys., 2017, 19, 4396-4404.
- 52 Z. Zou, T. Zhang, L. Lv, W. Tang, G. Zhang, R. K. Gupta, Y. Wang and S. Tang, ACS Sustain. Chem. Eng., 2023, 11, 7443-7453.
- 53 K. Brinkman, E. B. Fox, P. Korinko, R. Lascola, Q. Liu and F. Chen, MRS Online Proc. Libr., 2010, 1256, 1230-1256.
- 54 B. Liu, C. Li, G. Zhang, L. Yan and Z. Li, New J. Chem., 2017, 41, 12231-12240.
- 55 L. Minervini, M. O. Zacate and R. W. Grimes, Solid State Ionics, 1999, 116, 339-349.
- 56 W. D. Kingery, H. K. Bowen and D. R. Uhlmann, Introduction to Ceramics, John wiley & sons, 1976, vol. 17.
- 57 O. H. Laguna, M. A. Centeno, M. Boutonnet and J. A. Odriozola, Appl. Catal., B, 2011, 106, 621-629.
- 58 G. Li, R. L. Smith and H. Inomata, J. Am. Chem. Soc., 2001, 123, 11091-11092.
- 59 C. Liang, Z. Ma, H. Lin, L. Ding, J. Qiu, W. Frandsen and D. Su, J. Mater. Chem., 2009, 19, 1417-1424.
- 60 D. Jampaiah, T. Srinivasa Reddy, A. E. Kandjani, P. R. Selvakannan, Y. M. Sabri, V. E. Coyle, R. Shukla and S. K. Bhargava, J. Mater. Chem. B, 2016, 4, 3874-3885.
- 61 H. Wang and G. Tsilomelekis, Catal. Sci. Technol., 2020, 10, 4362-4372.
- 62 X. Chen, S. Zhan, D. Chen, C. He, S. Tian and Y. Xiong, Appl. Catal., B, 2021, 286, 119928.
- 63 L. Zhang, Y. Jiang, K. Zhu, N. Shi, Z. U. Rehman, R. Peng and C. Xia, Small Methods, 2024, 2301686.
- 64 H. Bao, X. Chen, J. Fang, Z. Jiang and W. Huang, Catal. Lett., 2008, 125, 160-167.
- 65 P. S. Murphin Kumar, S. Thiripuranthagan, T. Imai, G. Kumar, A. Pugazhendhi, S. R. Vijayan, R. Esparza, H. Abe and S. K. Krishnan, ACS Sustain. Chem. Eng., 2017, 5, 11290-11299.
- 66 C. Yang, F. Bebensee, J. Chen, X. Yu, A. Nefedov and C. Wöll, ChemPhysChem, 2017, 18, 1874-1880.
- 67 Q. Sun, Y. Liu, X. Li, X. Guo, W.-H. Huang, Y. Zhu, Z. Wang, C.-C. Chueh, C.-L. Chen, Y.-K. Peng and Z. Zhu, Energy Fuels, 2023, 37, 9434-9443.

Nanoscale Advances

- Kato, M. Ammann, T. Huthwelker, C. Paun, M. Lampimäki, M.-T. Lee, M. Rothensteiner and J. A. van Bokhoven, Phys. Chem. Chem. Phys., 2015, 17, 5078-5083.
- 69 C. Yang, F. Bebensee, J. Chen, X. Yu, A. Nefedov and C. Wöll, ChemPhysChem, 2017, 18, 1957.
- 70 M. Cheng, H. Fan, Y. Song, Y. Cui and R. Wang, Dalton Trans., 2017, 46, 9201-9209.
- 71 A. Punnoose, K. Dodge, J. J. Beltrán, K. M. Reddy, N. Franco, J. Chess, J. Eixenberger and C. A. Barrero, J. Appl. Phys., 2014, 115, 17B534.
- 72 Y. Xue, L. Hui, H. Yu, Y. Liu, Y. Fang, B. Huang, Y. Zhao, Z. Li and Y. Li, Nat. Commun., 2019, 10, 2281.
- 73 M.-C. Sung, G.-H. Lee and D.-W. Kim, J. Alloys Compd., 2019, 800, 450-455.
- 74 L. Zhou, P. He, T. Yang, S. Chen, O. He, F. Dong, L. Jia, H. Zhang, B. Jia and X. He, Int. J. Hydrogen Energy, 2020, 45, 28682-28695.
- 75 J. Rashid, N. Parveen, T. ul Haq, A. Iqbal, S. H. Talib, S. U. Awan, N. Hussain and M. Zaheer, ChemCatChem, 2018, 10, 5587-5592.
- 76 S. Swathi, R. Yuvakkumar, P. Senthil Kumar, G. Ravi, M. Thambidurai, C. Dang and D. Velauthapillai, Fuel, 2022, 310, 122319.
- 77 Q. Zhou, S. Liu, Y. Zhang, Z. Zhu, W. Su and M. Sheng, Ceram. Int., 2020, 46, 20871-20877.
- 78 L. Gui, Z. Wang, K. Zhang, B. He, Y. Liu, W. Zhou, J. Xu, Q. Wang and L. Zhao, Appl. Catal., B, 2020, 266, 118656.
- 79 L. Tian, H. Liu, B. Zhang, Y. Liu, S. Lv, L. Pang and J. Li, ACS Appl. Nano Mater., 2022, 5, 1252-1262.

- 80 L. Tian, H. Liu, X. Yi, X. Wang, L. Pang and J. Li, Int. J. Hydrogen Energy, 2023, 48, 23831-23841.
- 81 Y. Yu, Y. Liu, X. Peng, X. Liu, Y. Xing and S. Xing, Sustainable Energy Fuels, 2020, 4, 5156-5164.
- 82 Y.-N. Zhou, Y.-W. Dong, Y. Wu, B. Dong, H.-J. Liu, X.-J. Zhai, G.-Q. Han, D.-P. Liu and Y.-M. Chai, Chem. Eng. J., 2023, 463, 142380.
- 83 C. Hu, L. Zhang and J. Gong, Energy Environ. Sci., 2019, 12, 2620-2645.
- 84 H. Lin, W. Zhang, Z. Shi, M. Che, X. Yu, Y. Tang and Q. Gao, ChemSusChem, 2017, 10, 2597-2604.
- 85 M. Ji, W. Yaseen, H. Mao, C. Xia, Y. Xu, S. Meng, J. Xie and M. Xie, Inorg. Chem., 2023, 62, 12383-12391.
- 86 E. Demir, S. Akbayrak, A. M. Önal and S. Özkar, J. Colloid Interface Sci., 2019, 534, 704-710.
- 87 Y. Yu, X. Peng, U. Ali, X. Liu, Y. Xing and S. Xing, Inorg. Chem. Front., 2019, 6, 3255-3263.
- 88 D. Ghosh and D. Pradhan, *Langmuir*, 2023, **39**, 3358–3370.
- 89 Y. Tuo, X. Wang, C. Chen, X. Feng, Z. Liu, Y. Zhou and J. Zhang, Electrochim. Acta, 2020, 335, 135682.
- 90 S. Paladugu, I. M. Abdullahi, H. Singh, S. Spinuzzi, M. Nath and K. Page, ACS Appl. Mater. Interfaces, 2024, 16, 7014-7025.
- 91 J. Yu, J. Wang, X. Long, L. Chen, Q. Cao, J. Wang, C. Qiu, J. Lim and S. Yang, Adv. Energy Mater., 2021, 11, 2002731.
- 92 N. K. Shrestha, S. A. Patil, J. Han, S. Cho, A. I. Inamdar, H. Kim and H. Im, J. Mater. Chem. A, 2022, 10, 8989-9000.
- 93 Y.-N. Zhou, W.-L. Yu, Y.-N. Cao, J. Zhao, B. Dong, Y. Ma, F.-L. Wang, R.-Y. Fan, Y.-L. Zhou and Y.-M. Chai, Appl. Catal., B, 2021, 292, 120150.