

Cite this: *Energy Environ. Sci.*,  
2024, 17, 8756

# Techno-economic insights and deployment prospects of permanent carbon dioxide sequestration in solid carbonates†

Andreas Mühlbauer, <sup>ab</sup> Dominik Keiner <sup>\*b</sup> and Christian Breyer <sup>\*b</sup>

While a rapid defossilisation of the energy-industry system is at the highest priority for climate change mitigation, additional post-fossil carbon dioxide removal (CDR) for net-negative emissions will likely be necessary to ensure a safe future. An in-depth techno-economic analysis of differentiated sequestration options for carbon dioxide (CO<sub>2</sub>) in solid carbonates is not yet available, as direct air capture-based mineralisation is usually aggregated in direct air capture and carbon sequestration. This research gap is closed by studying mineralisation as a key CDR option to sequester atmospheric CO<sub>2</sub> permanently, based on available literature. The most frequently discussed routes for mineralisation, *i.e.*, *in situ*, *ex situ* mineralisation, and enhanced rock weathering, are examined. The deployment potentials of these options are determined globally for nine major regions. Results indicate that costs for all mineralisation options can be kept below 100 € per tCO<sub>2</sub> from 2050. From 2030 onwards, *in situ* mineralisation, with low energy-intensity, can be realised at cost of ≤131 € per tCO<sub>2</sub>, *ex situ* mineralisation at ≤189 € per tCO<sub>2</sub>, and enhanced weathering at ≤88 € per tCO<sub>2</sub>. Final energy demand for CO<sub>2</sub> sequestration *via in situ* mineralisation is ≤1.8 MWh per tCO<sub>2</sub>, *via ex situ* mineralisation ≤3.7 MWh per tCO<sub>2</sub>, and *via enhanced weathering* ≤1.1 MWh per tCO<sub>2</sub> from 2030. Large-scale deployment of mineralisation options supporting 60% of projected CDR demand is assessed to require up to 0.06% and 0.21% in global gross domestic product and up to 2.5% and 8.6% additional primary energy demand in 2070 for a 1.5 °C and 1.0 °C climate target, respectively. Implications, permanence of sequestration, and limitations are discussed, and a research outlook is provided.

Received 18th July 2024,  
Accepted 4th October 2024

DOI: 10.1039/d4ee03166k

rsc.li/ees

## Broader context

The fight against climate change requires different actions. Beneath the adaption to climate change, mitigating climate change through the deployment of renewable energy is of utmost importance. However, even for the 1.5 °C climate target, an entirely renewable energy system is not sufficient anymore. An expected 500 GtCO<sub>2</sub> must be removed to balance delayed action in climate change mitigation. In addition, climate restoration may be required to reach safe planetary boundaries at 350 ppm CO<sub>2</sub> in the atmosphere, or a 1.0 °C climate target. This requires an expected 1750 GtCO<sub>2</sub> to be removed from the atmosphere within the 21st century. For such large amounts of CO<sub>2</sub> to be sequestered, many factors play a role in assessing suitable options for carbon sequestration, such as energy demand, costs, area demand, technology readiness level, or permanence. The latter is an important point of discussion for gaseous or geological sequestration of CO<sub>2</sub> commonly associated with direct air carbon capture and sequestration. However, possible leakage, earthquakes, or well failures increase the risk of large-scale geological sequestration. This draws light on carbon mineralisation, where CO<sub>2</sub> is fixed in solid carbonates not to be released for at least thousands of years.

## 1. Introduction

The rising atmospheric greenhouse gas concentration leads to increasing global warming, putting human civilisation at risk.<sup>1</sup>

The trade-offs of intensive fossil fuel combustion enabling the industrial revolution and further economic growth<sup>2</sup> are becoming increasingly severe with rising mean air temperatures and more frequent extreme weather events.<sup>3</sup> To re-balance the climate system and to limit global warming to a sustainable level, rapid defossilisation and electrification of all industry sectors are necessary.<sup>4,5</sup> However, the latest findings of the Intergovernmental Panel on Climate Change (IPCC) imply the requirement for negative carbon dioxide (CO<sub>2</sub>) emissions through carbon dioxide removal (CDR) employing negative emission technologies (NET) and natural climate solutions

<sup>a</sup> Dept. of Civil and Environmental Engineering, Stanford University, Stanford, CA, 94305, USA

<sup>b</sup> School of Energy Systems, LUT University, Yliopistonkatu 34, 53850 Lappeenranta, Finland. E-mail: dominik.keiner@lut.fi, christian.breyer@lut.fi

† Electronic supplementary information (ESI) available. See DOI: <https://doi.org/10.1039/d4ee03166k>



(NCS).<sup>6</sup> While CDR can reduce CO<sub>2</sub> levels in the atmosphere, the management of other greenhouse gases such as methane or nitrogen dioxide is subject to current research.<sup>7</sup> CDR is partially required to offset residual emissions; however, the definition of residual emissions is subject to vested interests and often debatable.<sup>8</sup> Post-fossil CDR is also essential to achieve a net-negative energy-industry system.<sup>4,9</sup> To limit global warming to 1.5 °C by 2100, total negative emissions (TNE) of about 500 GtCO<sub>2</sub> from the atmosphere must be realised.<sup>10,11</sup> To reach even more ambitious yet safe and just targets of limiting global warming to 1.0 °C, TNE of up to 1750 GtCO<sub>2</sub> may be required.<sup>10–12</sup> The 1.5 °C and 1.0 °C climate targets will require annual CO<sub>2</sub> removal rates of up to 10 GtCO<sub>2</sub> per a and 40 GtCO<sub>2</sub> per a, respectively, when fully ramped if the climate shall be rebalanced in a timely manner.<sup>10–12</sup> The ambitious climate target of limiting global warming to 1.0 °C might be significantly more energy- and cost-intensive; however, it can help to achieve a sustainable and just future for civilisation<sup>12,13</sup> by avoiding major tipping points and potential cascades thereof.<sup>14–16</sup> An unprecedented reduction in cost of renewable electricity, which is currently observed, can enable such ambitious climate targets to return to the Holocene.<sup>17</sup> It is expected that the mineralisation of CO<sub>2</sub> can play a major role, with an expected potential of up to 10 GtCO<sub>2</sub> per a by 2050, sequestering atmospheric CO<sub>2</sub> safely for geological time scales.<sup>18,19</sup> Sandalow *et al.*<sup>19</sup> projected that, given adequate political

incentives and measures, about 1 GtCO<sub>2</sub> per a and 10 GtCO<sub>2</sub> per a can be mineralised by 2035 and 2050, respectively. However, most integrated assessment models (IAM) that are considered as scientific basis for IPCC reports include either no mineralisation option or only enhanced weathering (EW) in their studies, making these options underrepresented in current climate change mitigation research.<sup>11</sup>

NCS can sequester atmospheric CO<sub>2</sub> and have co-benefits on the environment, but the long-term effectiveness and storage duration as well as sustainable scalability are potential bottlenecks.<sup>20,21</sup> The CDR potential of NCS has been discussed intensively in literature.<sup>9,22</sup> NETs including direct air carbon capture and sequestration (DACCS),<sup>23–25</sup> bioenergy with carbon capture and sequestration (BECCS),<sup>26–29</sup> EW,<sup>30–33</sup> or biochar production<sup>34</sup> must be considered and potentially deployed on large-scale,<sup>11,35</sup> though research has indicated that diverse portfolios of CDR are preferable.<sup>11,36,37</sup> Bio-geo-chemical options such as EW, biochar production, or afforestation combine the CO<sub>2</sub> capture and storage step by sequestering atmospheric CO<sub>2</sub> in carbonates or biogenic materials.<sup>11,31,38</sup> In contrast, DACCS and BECCS are realised *via* concentrated CO<sub>2</sub> that can either be used as feedstock for e-fuels and e-chemicals to defossilise hard-to-abate sectors<sup>39–43</sup> or can be safely sequestered as negative emissions.<sup>11,44</sup> While most IAMs as of today model DACCS and BECCS without further specifying CO<sub>2</sub> sequestration modalities,<sup>11</sup> the production of carbon-

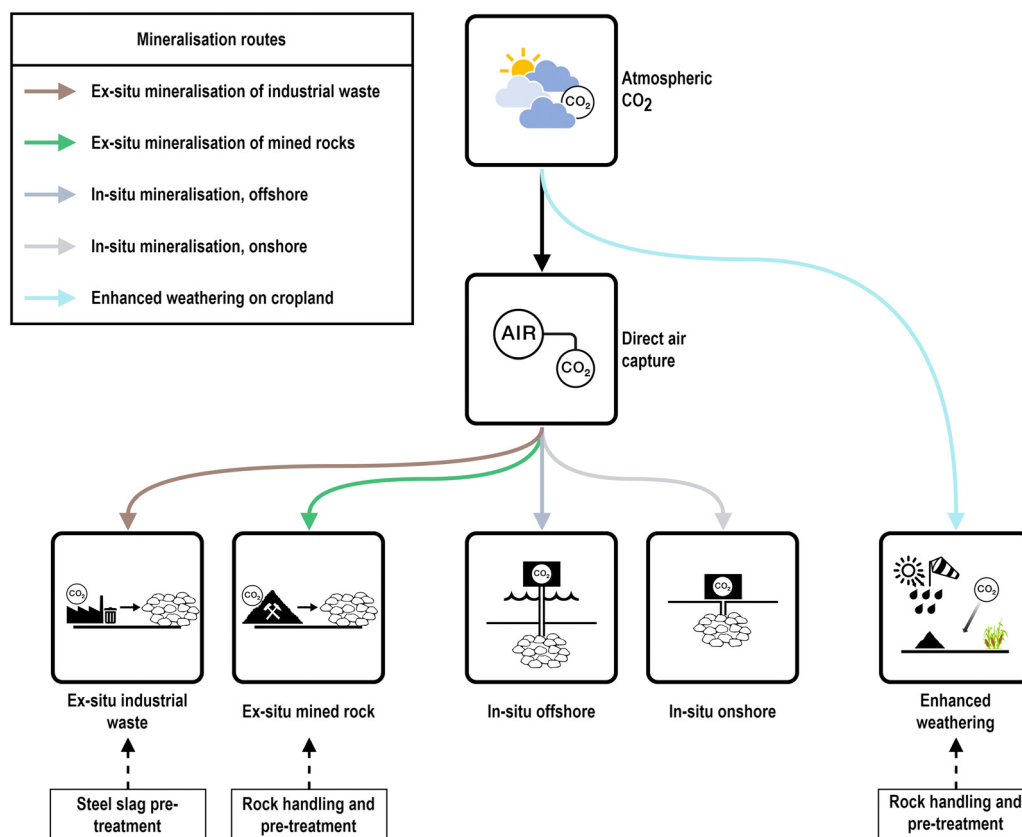


Fig. 1 Schematic overview on CO<sub>2</sub> mineralisation options adapted from Mühlbauer *et al.*<sup>11</sup>



bearing and electricity-based solid materials is introduced as alternative option.<sup>45–49</sup> The anticipated low-cost renewable electricity<sup>5,50</sup> can be utilised to enable novel NETs with relatively high energy demand following the overall trend towards a Power-to-X Economy<sup>51</sup> and higher sequestration security compared to geological underground CO<sub>2</sub> sequestration.<sup>11,52</sup> Solid carbon-bearing carbonates can be produced using *ex situ* mineralisation (MIN<sub>EX</sub>)<sup>53,54</sup> while simultaneously acting as valuable building material.<sup>55</sup> Also, CO<sub>2</sub> can be sequestered safely in suitable underground formations allowing for the *in situ* mineralisation (MIN<sub>IN</sub>) of CO<sub>2</sub> to form solid carbonates within a few years.<sup>44,56,57</sup> MIN<sub>IN</sub> can help mitigate concerns and potential flaws of other underground sequestration options such as leakage through previously impermeable caprocks<sup>58,59</sup> or in deep ocean storage options.<sup>60</sup> The sequestration of atmospheric CO<sub>2</sub> in stable solid materials can enable permanent CDR<sup>21</sup> and ensure effective negative emissions to aim for more ambitious climate targets.<sup>20</sup> CO<sub>2</sub> mineralisation may be a key technology to achieve such effective long-term stable atmospheric CO<sub>2</sub> sequestration.

An overview of the most frequently discussed CO<sub>2</sub> mineralisation options, *i.e.*, EW, MIN<sub>EX</sub>, and MIN<sub>IN</sub> is depicted in Fig. 1. While MIN<sub>EX</sub> and EW can both use suitable mafic and ultramafic rock from open pit mines to produce solid carbonates as a main product, MIN<sub>IN</sub> dissolves CO<sub>2</sub> in water to inject it into suitable deep formations of basaltic rocks or peridotites.<sup>44</sup> MIN<sub>EX</sub> can also use industrial solid wastes bearing magnesium (Mg) or calcium (Ca).<sup>61</sup> While this is also reported for EW,<sup>62</sup> this option is not considered within this work due to possible sustainability bottlenecks when applying waste material to large open areas.

The aim of this study is to provide a techno-economic assessment of options to sequester atmospheric CO<sub>2</sub> in minerals by different processes, closing research gaps of lacking literature on comprehensive CO<sub>2</sub> mineralisation options and a dedicated techno-economic assessment of respective NETs. A novelty of this study is the assessment of global-local potentials as well as economics of CO<sub>2</sub> mineralisation to provide the basis for future research in the energy-industry-CDR nexus.<sup>4</sup> Therefore, the novelties of this study include:

- Global-local potentials for CO<sub>2</sub> mineralisation enabling dedicated energy-industry-CDR system transition studies considering different CO<sub>2</sub> mineralisation options.
- Techno-economic parameters for CO<sub>2</sub> mineralisation options for further use in future energy-industry-CDR studies, including final energy demand and primary energy demand per tonne of sequestered CO<sub>2</sub>.
- Technology readiness level (TRL) of all mineralisation options to assess maturity.
- Global implications for the cost and primary energy demand of large-scale CO<sub>2</sub> sequestration with major shares of mineralisation.

By providing a novel basis for further research in implementing CO<sub>2</sub> mineralisation in energy-industry-CDR system transition simulations, this study aims to support the discussion about CO<sub>2</sub> mineralisation options for permanent CDR.

Early investigations of future cost, energy demand, and global regional potential are required to pave a way to a safe future. This study aims to provide a step towards in-depth understanding of CO<sub>2</sub> mineralisation in the context of energy-industry-CDR systems to simulate pathways to such respective safe futures.

## 2. Literature review

Geochemical NETs have been comprehensively reviewed<sup>19,63–67</sup> and current research gaps, *i.e.*, the identification of regional potentials or advanced understanding of biological influences on CO<sub>2</sub> mineralisation rates and other performance factors, have been identified.<sup>57,66</sup> Geochemical NETs have also recently been studied on a regional level as for the case of Spain,<sup>68</sup> South Africa,<sup>69</sup> the United Kingdom,<sup>70–72</sup> Austria,<sup>73</sup> or Japan.<sup>74</sup> Also, field trials have been carried out<sup>75</sup> to verify modelled CDR rates.<sup>76</sup>

Minerals containing alkaline-earth metal oxides such as calcium oxide (CaO) or magnesium oxide (MgO) react with CO<sub>2</sub> in an exothermic mineralisation reaction.<sup>77</sup> The natural weathering of rocks, induced by intense tectonism, is a significant part of the Earth's carbon cycle,<sup>78</sup> removing about 300 MtC per a from the atmosphere.<sup>19,79</sup> Rock types containing significant shares of suitable metal oxides include olivine, brucite, pyroxene, serpentine, wollastonite, and dunite among others.<sup>64</sup> Also, certain industrial wastes such as steelmaking slag can be used in MIN<sub>EX</sub> to obtain useful products.<sup>80,81</sup> Such dual use enables CO<sub>2</sub> capture, utilisation, and sequestration (CCUS) *via* mineralisation<sup>82–84</sup> or the production of renewable electricity-based and carbon-bearing solid materials.<sup>45–47</sup> As an example, Pan *et al.*<sup>85</sup> elaborate on the cases of electric arc furnace steelmaking, which also occur in a defossilised industry, and Portland cement manufacturing for a waste-to-resource supply chain by producing useful construction material from steelmaking slags.

The subsurface reaction of CO<sub>2</sub> with suitable rock to carbonates is usually referred to as *in situ* mineralisation (MIN<sub>IN</sub>) of CO<sub>2</sub><sup>19,44,63,64,86</sup> and is one out of four possible trapping mechanisms for CO<sub>2</sub> underground sequestration.<sup>60</sup> Suitable sequestration sites are basaltic rock formations or peridotites.<sup>57</sup> Rapid mineralisation removes the need for a long-term stable caprock.<sup>44,87,88</sup> MIN<sub>EX</sub> refers to engineered processes to mineralise CO<sub>2</sub> with suitable feedstock in reactors as first proposed by Lackner *et al.*<sup>53</sup> as early as 1995.<sup>86,89</sup> The reverse reaction of exothermal mineralisation, *i.e.*, calcination, is favoured at high temperatures (>900 °C for CaCO<sub>3</sub> and >300 °C for MgCO<sub>3</sub> at 1 bar CO<sub>2</sub> partial pressure), whereas mineralisation is favoured at relatively low temperatures.<sup>90</sup> Various reactor setups and the impact of different process parameters such as retention time have been studied<sup>54,91</sup> and lab-scale demonstration reactors are being operated.<sup>92</sup> MIN<sub>EX</sub> can be characterised either as direct or indirect mineralisation.<sup>77,90</sup> Both direct and indirect routes can be conducted in an aqueous or gas–solid environment,<sup>77,90</sup>



whereas, in indirect mineralisation, the reactive oxide (of Mg or Ca) or hydroxide is extracted from the feedstock.<sup>93–95</sup>

Enhancing the natural surface weathering of rocks is commonly referred to as EW.<sup>31–33</sup> Strefler *et al.*<sup>32</sup> investigated in detail the effect of the weathering efficiency of three different rock types, the influence of temperature and soil pH, and the optimal grain size of rocks for a study of the global CDR potential and the cost of EW in high spatial resolution. Best suited locations are therein characterised as warm and humid,<sup>32</sup> which was also confirmed in field experiments.<sup>96</sup> Beerling *et al.*<sup>31</sup> employ a one-dimensional vertical reactive transport model for basalt weathering with a steady-state flow to conduct their techno-economic and potential assessment for EW on a global scale in 2050. In contrast to Strefler *et al.*,<sup>32</sup> Beerling *et al.*<sup>31</sup> account for soil pH and varying grain size by considering a log-normal grain size distribution. Also, Beerling *et al.*<sup>31</sup> apply the fractal dimension to account for uncertainties in grain topography and porosity and consider annual rock application over a 10-year time horizon. Goll *et al.*<sup>33</sup> studied EW and the implications of fertility enhancement by basalt application to global hinterland. Enhancing the soil fertility by basalt application can improve the ecosystem's carbon uptake, further increasing the CDR potential.<sup>33</sup> Cipolla *et al.*<sup>97</sup> study the impact of rainfall, vegetation, and soil type on the efficacy of EW of olivine, calculated with a formerly introduced model<sup>98,99</sup> for three case studies. Results indicate a major impact from annual rainfall distribution and the authors concluded that irrigation can substantially increase weathering rates.<sup>97</sup> The grain size of the applied rock also significantly impacts the EW rate.<sup>73</sup> Eufrazio *et al.*<sup>100</sup> conducted a thorough life cycle assessment (LCA) of EW and found that, in order to maintain a high carbon efficiency, renewable electricity is required to satisfy the comminution electricity demand. Eufrazio *et al.*<sup>100</sup> also build on the results provided by Beerling *et al.*<sup>31</sup> and compare EW's impact in terms of energy demand, land requirement, and water requirement to other NET options. Vakilifard *et al.*<sup>101</sup> studied the impact of EW, modelled by the approach introduced by Beerling *et al.*,<sup>31</sup> co-deployment on the Earth system. The authors conclude that the additional CDR provided can increase the likelihood of limiting global warming in 2100 to 1.5 °C and the ocean alkalinity to benefit marine ecosystems.<sup>101</sup> EW using different suitable industrial waste as feedstock is studied frequently.<sup>31,62,102,103</sup> Further literature findings on the cost and energy demand for EW are aggregated in Note 4 in the Supplementary material 1 (ESI<sup>†</sup>).

As stated by Sandalow *et al.*,<sup>19</sup> the global potential for different CO<sub>2</sub> mineralisation options in high spatial resolution is a major research gap that must be addressed. Additionally, Wei *et al.*<sup>104</sup> find that current assessments should be harmonised using a hierarchical framework that they proposed. The global potential of mine tailings for CDR was studied by Bullock *et al.*<sup>105</sup> on a global to regional scale. Kremer *et al.*<sup>106</sup> mapped and categorised potential input material for CO<sub>2</sub> mineralisation in Europe; however, comprehensive data in high spatial resolution on availability and accessibility of sequestration sites is still largely missing.<sup>19,57</sup> This study aims to close

the abovementioned research gaps by providing a comprehensive techno-economic overview on CO<sub>2</sub> mineralisation options and respective global-local sequestration potentials.

### 3. Methods and data

Within this study, techno-economic parameters for different CO<sub>2</sub> mineralisation options are elaborated to provide the basis for future energy-industry-CDR system analyses. The following sections are structured as follows. In subsection 3.1, assumptions for process configurations are described. In subsection 3.2, the assessed processes of this study are further specified, followed by a global-local potential investigation for these processes in subsection 3.3. Techno-economic data are aggregated from various sources in literature and presented in Table 1 for traceability. Considering the state of deployment of mineralisation options, those techno-economic assumptions are subject to uncertainty. All costs are corrected for inflation to the year 2020 and cost that are given in USD are adjusted to € with a long-term exchange rate of 1.2 USD per € applied.

#### 3.1. Mineralisation routes

Carbonates, the final products of CO<sub>2</sub> mineralisation, are highly stable solid products showing low Gibb's free enthalpy compared to CO<sub>2</sub> and is, therefore, expected to remain stable and sequestering atmospheric CO<sub>2</sub> safely.<sup>110</sup> The low Gibb's free enthalpy of carbonates compared to gaseous CO<sub>2</sub> is reflected in the high thermal inertia and stability of carbonates and results in reported CO<sub>2</sub> sequestration times of geological timescales.<sup>44</sup> Further fundamentals of the mineralisation reaction are elaborated in Note 1 in the Supplementary material 1 (ESI<sup>†</sup>).

**3.1.1. *In situ* mineralisation.** At the CarbFix and CarbFix2 site in Iceland, MIN<sub>IN</sub> is operated successfully for one decade already<sup>111</sup> in combination with a geothermal powerplant.<sup>112</sup> Kali *et al.*<sup>87</sup> studied the underground sequestration of CO<sub>2</sub> in different sites such as in subsurface basalt formations suitable for MIN<sub>IN</sub>. While an abundant global theoretical sequestration potential in basalt is expected, a major bottleneck of MIN<sub>IN</sub> is the extensive water demand, making MIN<sub>IN</sub> about twice as expensive as other geological sequestration options.<sup>87</sup> Dissolving CO<sub>2</sub> in water prior to injection is crucial to enhance the reaction kinetics to rapidly mineralise the CO<sub>2</sub> for safe sequestration.<sup>44</sup> Injected water can partially be circulated,<sup>113</sup> as shown at the CarbFix site's geothermal powerplant.<sup>114</sup> The substitution of freshwater with seawater for underground injection of CO<sub>2</sub> is currently studied<sup>115</sup> and mineralisation of CO<sub>2</sub> in underground basaltic rock formations at mineralisation rates of up to 80% and 95% within one and two years, respectively,<sup>44</sup> ensures safe long-term sequestration of atmospheric CO<sub>2</sub> in solid carbonates underground.<sup>113</sup> For MIN<sub>IN</sub>, supercritical CO<sub>2</sub> or CO<sub>2</sub> dissolved in water is injected to suitable sequestration sites with highly permeable and porose rocks at depths of 1000–2500 m.<sup>87</sup> The average lifetime of injection projects is about 20 years.<sup>87</sup> The overview of large igneous provinces (LIP) and



**Table 1** Initial techno-economic parameters for technologies and processes for CO<sub>2</sub> mineralisation. All numbers taken from references were recalculated to 2020 values in €. Electricity input represents the electricity demand for driving processes involved and heat input is thermal energy used in reaction reactors. Further information can be found in the Notes 2–4 of Supplementary material 1 and in the Supplementary material 2 (ESI)

Technology	Parameter	Unit	Value	Ref.
Open-pit mining	CAPEX	€ per (tOre/a)	6.0	31
	OPEXfix	€ per tOre	4.6	
	OPEXvar	€ per tOre	0.0	
	Lifetime	years	10	32,89
	Electricity input	kWh <sub>el</sub> per tOre	5.2	
	Heat input	kWh <sub>th</sub> per tOre	0.0	
	Heat output	kWh <sub>th</sub> per tOre	0.0	
Rock transportation	Cost	€ per (tRock-100 km)	4.4	32
	Lifetime	Years	—	
	Electricity input	kWh <sub>el</sub> per (tOre-100 km)	1.4	
	Heat input	kWh <sub>th</sub> per tOre	0.0	
	Heat output	kWh <sub>th</sub> per tOre	0.0	
Rock comminution	CAPEX	€ per (tOre/a)	—	Own assumption
	OPEXfix	€ per tOre	—	
	OPEXvar	€ per tOre	—	
	Lifetime	Years	—	
	Electricity input	kWh <sub>el</sub> per tOre	127.8	
	Heat input	kWh <sub>th</sub> per tOre	0.0	
Rock spreading	Heat output	kWh <sub>th</sub> per tOre	0.0	Own assumption
	CAPEX	€ per (tCO <sub>2</sub> /a)	208.4	
	OPEXfix	€ per tCO <sub>2</sub>	—	
	OPEXvar <sup>a</sup>	€ per tCO <sub>2</sub>	13.8	
	Lifetime	Years	50	
	Electricity input <sup>b</sup>	kWh <sub>el</sub> per tCO <sub>2</sub>	0.0	
	Heat input	kWh <sub>th</sub> per tCO <sub>2</sub>	0.0	
Direct aqueous mineralization – serpentine	Heat output	kWh <sub>th</sub> per tCO <sub>2</sub>	0.0	55,107
	CAPEX	€ per (tCO <sub>2</sub> /a)	208.4	
	OPEXfix	€ per tCO <sub>2</sub>	6.3	
	OPEXvar <sup>a</sup>	€ per tCO <sub>2</sub>	13.8	
	Lifetime	Years	50	
	Electricity input	kWh <sub>el</sub> per tCO <sub>2</sub>	455.0	
Direct aqueous mineralization – olivine	Heat input	kWh <sub>th</sub> per tCO <sub>2</sub>	452.0	55,107
	Heat output	kWh <sub>th</sub> per tCO <sub>2</sub>	0.0	
	CAPEX	€ per (tCO <sub>2</sub> /a)	208.4	
	OPEXfix	€ per tCO <sub>2</sub>	6.3	
	OPEXvar <sup>a</sup>	€ per tCO <sub>2</sub>	13.8	
	Lifetime	years	50	
Direct aqueous mineralization – steel slag	Electricity input	kWh <sub>el</sub> per tCO <sub>2</sub>	689.0	108
	Heat input	kWh <sub>th</sub> per tCO <sub>2</sub>	103.0	
	Heat output	kWh <sub>th</sub> per tCO <sub>2</sub>	0.0	
	CAPEX	€ per (tCO <sub>2</sub> /a)	208.4	
	OPEXfix	€ per tCO <sub>2</sub>	6.3	
	OPEXvar	€ per tCO <sub>2</sub>	13.8	
CO <sub>2</sub> underground injection – onshore	Lifetime	Years	50	89
	Electricity input	kWh <sub>el</sub> per tCO <sub>2</sub>	592.0	
	Heat input	kWh <sub>th</sub> per tCO <sub>2</sub>	407.0	
	Heat output	kWh <sub>th</sub> per tCO <sub>2</sub>	0.0	
	CAPEX	€ per (tCO <sub>2</sub> /a)	35.0	
	OPEXfix	€ per tCO <sub>2</sub>	1.5	
CO <sub>2</sub> underground injection – offshore	OPEXvar	€ per tCO <sub>2</sub>	0.0	109
	Lifetime	Years	40	
	Electricity input	kWh <sub>el</sub> per tCO <sub>2</sub>	70.0	
	Heat input	kWh <sub>th</sub> per tCO <sub>2</sub>	0.0	
	Heat output	kWh <sub>th</sub> per tCO <sub>2</sub>	0.0	
	CAPEX	€ per (tCO <sub>2</sub> /a)	99.5	
CO <sub>2</sub> underground injection – offshore	OPEXfix	€ per tCO <sub>2</sub>	3.5	109
	OPEXvar	€ per tCO <sub>2</sub>	0.0	
	Lifetime	Years	40	
	Electricity input	kWh <sub>el</sub> per tCO <sub>2</sub>	70.0	
	Heat input	kWh <sub>th</sub> per tCO <sub>2</sub>	0.0	
	Heat output	kWh <sub>th</sub> per tCO <sub>2</sub>	0.0	

<sup>a</sup> Opex<sub>var</sub> represents the cost including energy of feedstock preparation normalised to 1 tonne CO<sub>2</sub> sequestered. <sup>b</sup> The electricity demand for rock spreading is assumed to be already included in rock transportation.

flood basalt shown in Fig. 2 implies that potential for MIN<sub>IN</sub> is available over the globe with potentially accessible sequestration sites characterised by mafic or ultramafic basalt located on all continents.<sup>44</sup> LIP and flood basalt were built by




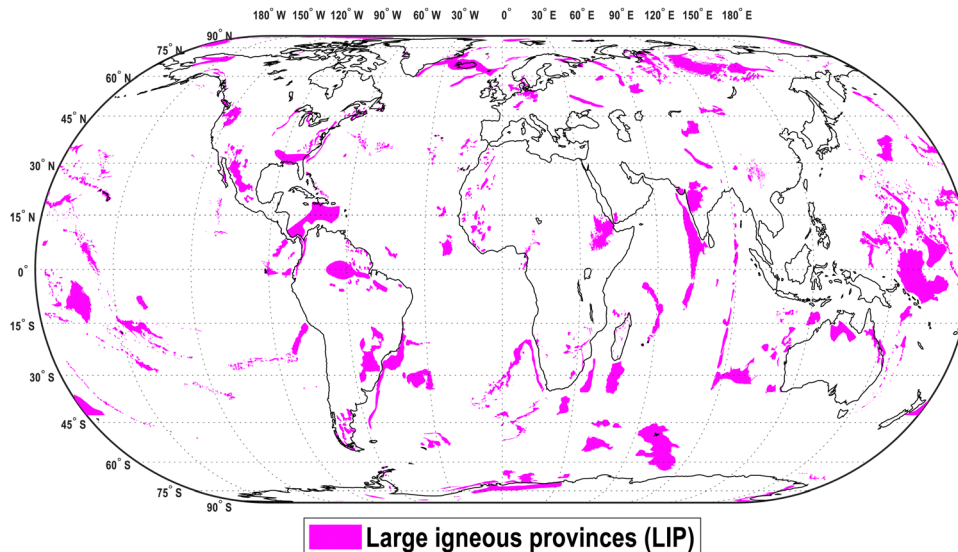


Fig. 2 Global overview on large igneous provinces (LIP) and flood basalt showing potential  $\text{MIN}_{\text{IN}}$  sequestration sites<sup>44</sup> which are characterised by mafic and ultramafic basalt.<sup>44,57</sup> Data source.<sup>117</sup>

volcanic magma in a rather short period of time for geologic time scales and are rich in required minerals for  $\text{CO}_2$  mineralisation.<sup>116</sup> This study does not consider  $\text{MIN}_{\text{IN}}$  of the  $\text{CO}_2$  brine layer.

The  $\text{CO}_2$  mineralisation reaction of Wollastonite (calcium silicate,  $\text{CaSiO}_3$ ) or Enstatite (magnesium silicate,  $\text{MgSiO}_3$ ) present in ultramafic rocks to magnesium carbonate ( $\text{MgCO}_3$ ) or calcium carbonate ( $\text{CaCO}_3$ ) and silicon dioxide ( $\text{SiO}_2$ ) can be summarised by eqn (1):<sup>67</sup>





For the mineralisation reaction, gaseous  $\text{CO}_2$  is generally dissolved in water. Further information on the  $\text{MIN}_{\text{IN}}$  process is available in Supplementary material 1, Note 1 (ESI†).

**3.1.2. Ex situ mineralisation.**  $\text{MIN}_{\text{EX}}$  can be conducted in direct or indirect ways. Indirect  $\text{MIN}_{\text{EX}}$  pathways extract reactive material from feedstock in a separate step prior to carbonation. In this study, the direct aqueous carbonation reactor design as parametrised by Ostovari *et al.*<sup>89</sup> is considered. No indirect mineralisation options are considered in this study due to the lower carbon efficiency compared to direct routes when cement substitution is not accredited.<sup>89</sup> Ostovari *et al.*<sup>89</sup> consider a continuously stirred tank reactor for olivine, serpentine, and steel slag. The pre-treatment differs between feedstocks: olivine is grinded and milled; serpentine is grinded before magnetite is magnetically separated, with the remaining feedstock being thermally treated;<sup>89</sup> and steel slag only needs grinding.<sup>89</sup> All feedstock is mixed with water and additives before the carbonation in a rotary packed bed reactor and is de-watered in a subsequent post-processing step.<sup>89</sup> Dri *et al.*<sup>118</sup> noted that even though gross freshwater demand for aqueous  $\text{MIN}_{\text{EX}}$  is significant, about 99.96% can be reused, limiting the net freshwater demand of  $\text{MIN}_{\text{EX}}$  to about 0.08  $\text{tH}_2\text{O}$  per  $\text{tCO}_2$ . Rock pre-treatment processes can be mechanical (crushing, grinding,

milling), thermal or mechanochemical.<sup>119</sup> Main process parameters for  $\text{MIN}_{\text{EX}}$  are the feedstock's cation content, the pre-treatment (grain diameter, temperature), operating pressure, temperature, potential additives, and feedstock residence time in the reactor.<sup>93</sup> Process temperatures generally range from up to 200 °C for aqueous processes to up to 700 °C for rock pre-treatment.<sup>119</sup> All heat demand for  $\text{MIN}_{\text{EX}}$  in this study is considered as high-temperature heat that cannot be provided through heat pumps. However, aqueous  $\text{MIN}_{\text{EX}}$  using pre-treated feedstock is feasible at process parameters of 100–180 °C and 100–160 bar, possibly enabling the use of high-temperature heat pumps.<sup>120</sup> Optimal carbonation conditions as proposed by Gerdemann *et al.*<sup>121</sup> are 185 °C and 150 bar  $\text{CO}_2$  partial pressure for olivine, 100 °C and 40 bar  $\text{CO}_2$  partial pressure for wollastonite, and 155 °C and 115 bar  $\text{CO}_2$  partial pressure for serpentine. Such as conducted by Ostovari *et al.*,<sup>108</sup> the life cycle inventory data in this study for the above mentioned processes are adapted with operational pressures of 100 bar, 115 bar, and 20 bar for  $\text{MIN}_{\text{EX}}$  of olivine, serpentine, and steel slag, respectively.

The reaction of mined rocks is similar to eqn (1). The mineralisation of industrial waste, more specifically the containing minerals magnesium oxide ( $\text{MgO}$ ), calcium oxide ( $\text{CaO}$ ), magnesium hydroxide ( $\text{Mg}(\text{OH})_2$ ), or calcium hydroxide ( $\text{Ca}(\text{OH})_2$ ) to  $\text{MgCO}_3$  or  $\text{CaCO}_3$  and water ( $\text{H}_2\text{O}$ ) is described by eqn (2) and (3):<sup>67</sup>



Gaseous  $\text{CO}_2$  may be in aqueous solution when reacting to solid carbonates, however, dry reactions are also possible, thus the state is not further specified in eqn (2) and (3). The ranges of metal oxide share in different rock types and industrial waste vary by a multitude of parameters and influence both the total



weathering potential (WP) and reaction kinetics.<sup>63</sup> Metal oxides contributing to mineralisation of industrial waste also encompass Al, Fe, Na, and K.<sup>122</sup> The WPs of different rock types have been reviewed in several studies and elaborated in experiments.<sup>123</sup> The dissolution rate of rock feedstock is crucial to understand reaction kinetics and research in creating comprehensive databases is advancing.<sup>124</sup> The energy and material demand for the respective MIN<sub>EX</sub> configurations are also adapted from Ostovari *et al.*<sup>89,108</sup> (*cf.* Note 3 in the Supplementary material 1 and in the Supplementary material 2, ESI†).

**3.1.3. Enhanced weathering.** Within this study, EW is considered with rock handling, which includes mining, comminution, and transportation as well as the spreading of rock on suitable land. In this study, potentials are only assessed for cropland as it is actively managed and rock can be applied with existing machinery<sup>32</sup> but other types of land such as hinterland were previously assessed to show promising potentials.<sup>33</sup> Section 3.1.4 further elaborates on comminution. The crushed rock is applied mainly to agricultural land to enhance the natural CO<sub>2</sub> uptake of calcium- and magnesium-rich silicate rocks.<sup>31</sup> Rock spreading in this study is largely parametrised according to Strefler *et al.*,<sup>32</sup> while Beerling *et al.*<sup>31</sup> also provided an effective approach to capture the cost of EW.

For EW, as Strefler *et al.*<sup>32</sup> describe, the annual CDR rate for a specific land area  $r_{\text{CO}_2}^{\text{CDR}}$  is determined by the total amount of rock spread  $m$ , the dissolution rate  $d$ , and the CO<sub>2</sub> sequestration potential  $p$  of the applied rock type. The dissolution rate  $d$  is depending on the specific surface area  $a$ , the weathering rate  $w$ , and the molar mass  $M$ . The constant  $\vartheta$  is used to investigate annual weathering using a conversion rate of  $3.155 \times 10^7 \text{ s a}^{-1}$ . The grain size  $x$  is applied in  $\mu\text{m}$ . Therefore, the amount of CO<sub>2</sub> removed annually is calculated as described in eqn (4)–(6) as proposed by Strefler *et al.*<sup>32</sup> All input parameters assumed for further calculations can be found in Supplementary material 2 (ESI†).

$$r_{\text{CO}_2}^{\text{CDR}} = m \cdot d(x) \cdot p \quad (4)$$

$$d(x) = a(x) \cdot w \cdot M \cdot \vartheta \quad (5)$$

$$a(x) = 69.18 \cdot x^{-1.24} \quad (6)$$

This study relies on geochemical modelling shown in previous studies<sup>31,32</sup> and does not largely focus on physical processes of EW. Instead, this study focuses on the overall energy demand and economic parameters derived from previous studies.

**3.1.4. Mined rock feedstock preparation.** Derived from the formulas given by Strefler *et al.*<sup>32</sup> the electricity demand per tonne of CO<sub>2</sub> removed *via* EW through basalt annually is plotted in Fig. 3. Based on the share of rock weathered per year at 20 °C in relation to the grain size, the electricity demand for grinding rock to the respective grain size from an initial grain size of 100  $\mu\text{m}$  is calculated. Strefler *et al.*<sup>32</sup> assume that 1 kgCO<sub>2</sub> can be captured and sequestered by 0.8 kg dunite or 3.3 kg basalt.

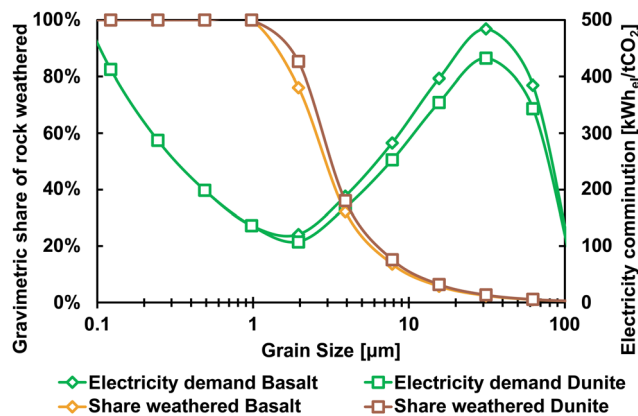


Fig. 3 The share of rock weathered (left vertical axis) after one year at 20 °C based on formulas given by Strefler *et al.*<sup>32</sup> and the resulting electricity demand for comminution per tonne of CO<sub>2</sub> removed (right vertical axis) based on different grain size for Basalt and Dunite.

As can be seen in Fig. 3, the electricity demand for comminution is optimal at a grain size of about 2  $\mu\text{m}$  from a feed size of 100  $\mu\text{m}$  at an electricity demand of about 120 kWh<sub>el</sub> per tCO<sub>2</sub> (*cf.* Supplementary material 2 for details, ESI†). At this grain size, about 80% of the rock particles are weathered within one year minimising the specific electricity demand for rock comminution relative to the mass of CO<sub>2</sub> mineralised. However, a grain size below 10  $\mu\text{m}$  is anticipated to potentially bear health risks for humans.<sup>32</sup> A grain size of ground feedstock material of 10  $\mu\text{m}$  is assumed in this study corresponding to an electricity demand of 127.8 kWh<sub>el</sub> per tRock (*cf.* Note 3 in the Supplementary material 1, ESI†) which would correspond to an electricity demand of about 322 kWh per tCO<sub>2</sub> and 288 kWh per tCO<sub>2</sub> when using basalt and dunite, respectively. This assumption is made for EW as well as for MIN<sub>EX</sub> feedstock preparation. For rock mining and crushing, an electricity demand of 50 kWh<sub>el</sub> per tRock is assumed (*cf.* Note 3 in the Supplementary material 1, ESI†). As rock mining and crushing does not affect the final grain size and, therefore, the rate of weathering, the electricity demand is equivalent to 165 kWh per tCO<sub>2</sub> and 40 kWh per tCO<sub>2</sub> when using basalt and dunite, respectively, when assuming the weathering efficiencies provided by Strefler *et al.*<sup>32</sup>

## 3.2. Techno-economics and process specifications

In this subsection, all techno-economic input data and assumed process configurations, which are also displayed in schematics shown in Fig. 1, are presented. Within this work all energy- and mass balances and cost are normalised to the functional unit of 1 tCO<sub>2</sub> permanently removed and sequestered.

In this study, it is assumed that industrial solid waste suitable for mineralisation can be acquired for no additional cost and without additional energy demand, *i.e.*, it is available as waste product that is otherwise disposed. For DAC, techno-economic specifications from Fasihi *et al.*<sup>23</sup> and as adapted in Mühlbauer *et al.*<sup>11</sup> are assumed. Details are elaborated in the



Supplementary material 1 (ESI†). Rock crushing, grinding, and comminution is estimated to be 8.3 € per t (10 USD per t) for full life-cycle cost including energy.<sup>125</sup> Within this study, the estimation by Streffer *et al.*<sup>32</sup> for electricity demand of 127.8 kWh t<sup>-1</sup> is applied which leads to cost of 5.3 € per t in 2020. Technology learning is a well-established approach to quantify the future cost reduction of technologies.<sup>107,126,127</sup> While rock comminution, rock mining and handling, as well as CO<sub>2</sub> injection are assumed to have no further substantial learning due to the widespread maturity and high historic installed capacity, capital expenditure (CAPEX) learning of MIN<sub>EX</sub> is assumed based on estimates by Faber *et al.*<sup>107</sup> Thus, CAPEX reduction calculated with a learning rate of 10.55% and a deployment projection reaching 3.46 GtCO<sub>2</sub> per a cumulative installed capacity for MIN<sub>EX</sub> is assumed (*cf.* Supplementary material 2, ESI†). Cost reductions for DAC are adapted from Mühlbauer *et al.*<sup>11</sup> which are based on Fasihi *et al.*<sup>23</sup>

The initial techno-economic input parameters used in this study are listed in Table 1. Assumptions regarding the future cost development are elaborated in more detail in the Notes 2–4 of Supplementary material 1 and in the Supplementary material 2 (ESI†).

CO<sub>2</sub> mineralisation generally produces solid carbonates and other by-products. The potential of these by-products in the cement industry has been investigated in several studies.<sup>55,128–130</sup> The energy- and CO<sub>2</sub>-intensive cement production is challenging to decarbonise,<sup>131</sup> therefore, synergies with CO<sub>2</sub> mineralisation can be a valuable option. For example, substituting up to 5% of Portland cement in mortars with feed and by-products of mineral carbonation was found to maintain compressive strength while reducing CO<sub>2</sub> emissions and cost of waste disposal.<sup>128</sup> Also, other industries such as paper or rubber production have been identified as potential customers for by-products of CO<sub>2</sub> mineralisation.<sup>83</sup>

All process chains presented within this study are evaluated regarding their final energy (FE) demand and levelised cost of CDR. The FE demand of each process chain for CO<sub>2</sub> mineralisation  $E_{FE,NET}$  is calculated according to eqn (7).

$$E_{FE,NET} = \frac{\sum_p E_{FE,p} \cdot m_{out,p}}{1tCO_2 \text{ removed}} \quad (7)$$

Wherein  $E_{FE,p}$  is the final energy demand in MWh per tCO<sub>2</sub> or MWh per tRock for rock comminution and transportation of each process step  $p$  and  $m_{out,p}$  is the output mass of CO<sub>2</sub> or rock of each process  $p$  that is reacted for sequestering 1 tCO<sub>2</sub> in carbonates. Future improvements in the energy demand of CO<sub>2</sub> mineralisation processes are omitted. Low temperature heat demand is converted to final energy in the form of electricity assuming a coefficient of performance of the heat pump of 2.16, 2.48, and 2.80 in 2030, 2040, and 2050, respectively.<sup>11</sup> Heat at higher temperature levels is assumed to be provided by direct electric heating with an efficiency of 100%. The primary energy (PE) demand of each process chain  $E_{PE,NET}$  is further

calculated using eqn (8):

$$E_{PE,NET} = \frac{E_{FE,NET}}{f_{PE}} \quad (8)$$

wherein  $f_{PE}$  is a PE factor that includes curtailment, intermediate battery storage with associated losses, and transmission losses and is set to 90.41%, 93.57%, and 93.58% in 2030, 2040, and 2050, respectively, as applied by Mühlbauer *et al.*<sup>11</sup> based on LUT-DEMAND.<sup>10,132</sup>

For each CO<sub>2</sub> mineralisation process chain, the levelised cost of CDR LCOC<sub>DR</sub> is calculated according to eqn (9).

$$LCOC_{DR,NET} = \sum_p [LCOP_{p,co} + H_{LT,p} \cdot LCO_{HT}] + (E_{FE,p} + H_{HT,p}) \cdot LCOE \cdot \frac{m_{out,p}}{1tCO_2 \text{ removed}} \quad (9)$$

wherein  $LCOP_{p,co}$  is the levelised cost of product based on capex and opex only of each process in the process chain,  $H_{LT,p}$  is the low temperature energy demand of each process and  $LCO_{HT}$  is the levelised cost of low temperature heat provided by heat pumps that is calculated in eqn (13). High temperature heat demand  $H_{HT,p}$  is assumed to be provided with direct electric heating, hence is treated as electricity demand. The sum of the final energy demand of each process  $E_{FE,p}$  and the high temperature heat demand  $H_{HT,p}$  of each process is multiplied by the levelised cost of electricity LCOE. The summand of each process is normalised to the mass output  $m_{out,p}$  for removing 1 tCO<sub>2</sub>.

The  $LCOP_{p,co}$  is calculated according to eqn (10)–(12) wherein the CAPEX, fixed operational expenditures OPEX<sub>fix</sub>, the variable operational expenditures OPEX<sub>var</sub>, the weighted average cost of capital WACC and lifetime  $N$ , and the availability  $\tau$  of each process  $p$  are used.

$$LCOP_{p,co} = \frac{(\text{CAPEX}_p \cdot \text{crf}_p + \text{OPEX}_{\text{fix}_p}) \cdot \text{cap}_p}{\text{out}_p + \text{OPEX}_{\text{var}_p}} \quad (10)$$

$$\text{crf}_p = \frac{\text{WACC} \cdot (1 + \text{WACC})^{N_p}}{(1 + \text{WACC})^{N_p} - 1} \quad (11)$$

$$\text{out}_p = \text{cap}_p \cdot \tau_p \quad (12)$$

where  $\text{out}_p$  is the output of a process, and  $\text{cap}_p$  the capacity of a process. The units depend on the process. The levelised cost of low temperature heat  $LCO_{HT}$  provided *via* heat pump HP is calculated using eqn (13).

$$LCO_{HT} = \frac{\text{CAPEX}_{\text{HP}} \cdot \text{crf}_{\text{HP}} + \text{OPEX}_{\text{fix}_{\text{HP}}}}{8760 \cdot \frac{\tau}{\text{COP}} + \text{OPEX}_{\text{var}_{\text{HP}}}} \quad (13)$$

wherein  $COP$  is the coefficient of performance of the heat pump.





### 3.3. Applied scenarios for total cost and primary energy demand estimation

The primary energy demand and cost of large-scale mineralisation is assessed for the exemplary years 2050 and 2070. The analysis is conducted by assuming that 60% of the CDR demand for the 1.5 °C and 1.0 °C climate targets<sup>10,12</sup> is covered with mineralisation options. The basic primary energy demand is estimated using LUT-DEMAND, applying the LUT-delayed economic equality scenario (LUT-DEES) for GDP per capita and medium population projection of the United Nations (UN) as macro-economic basis.<sup>10</sup> Of these 60%, the contribution is assumed to be 20% each onshore and offshore MIN<sub>IN</sub>, 10% EW, and 3.3% for each MIN<sub>EX</sub> using serpentine, olivine, and industrial waste. Details on the calculation can be found in the Supplementary material 2 (ESI<sup>†</sup>), where alternative assumptions can be applied.

### 3.4. Assessment of sequestration potentials

Literature findings on the cumulative and annual CO<sub>2</sub> mineralisation potential on a regional spatial resolution are allocated to the nine major regions as of the LUT Energy System Transition Model (LUT-ESTM), which are Europe, Eurasia, Middle East and North Africa (MENA), sub-Saharan Africa (SSA), South Asian Association for Regional Cooperation (SAARC), Northeast Asia, Southeast Asia, North America, and South America.<sup>50</sup>

For MIN<sub>IN</sub>, a summary on global-regional total potential by Oelkers *et al.*<sup>57</sup> is used. To identify economically feasible sequestration capacities, 10% of the capacity reported by Oelkers *et al.*<sup>57</sup> is assumed to be economic potential and sequestration sites are assigned to the above-mentioned major regions. This approach bears significant uncertainty and should be further challenged as a major point on the research agenda for MIN<sub>IN</sub> proposed by Oelkers *et al.*<sup>57</sup> To derive the annual injection and sequestration potential of MIN<sub>IN</sub> locations in MtCO<sub>2</sub> per a, the surface area, as communicated by Oelkers *et al.*<sup>57</sup> is multiplied by the area specific injection rate as proposed by Wijaya *et al.*<sup>133</sup> Several methods for sequestration capacity estimation of CO<sub>2</sub> underground sequestration sites have been established.<sup>60</sup> Nevertheless, thorough MIN<sub>IN</sub> potential analysis in high spatial resolution is a current research gap.<sup>57</sup> Vishal *et al.*<sup>134</sup> estimate a total MIN<sub>IN</sub> potential for India of 97–316 GtCO<sub>2</sub> as a conservative theoretical estimate. They apply methods proposed by McGrail *et al.*<sup>135</sup> and Snæbjörnsdóttir *et al.*<sup>136</sup> to assess the sequestration potential of Indian basaltic formations.

Myers and Nakagaki<sup>74</sup> conducted a regional study on MIN<sub>EX</sub> and concluded that Japan alone can achieve CDR at the rate of up to 7.6 GtCO<sub>2</sub> per a. Slag-based MIN<sub>EX</sub> alone is expected to enable cumulative MIN<sub>EX</sub> of 26.4–41.9 GtCO<sub>2</sub> between 2020 and 2100.<sup>137</sup> Steel slag's high CaO and MgO content of about 37%<sub>w</sub>t and 9.1%<sub>w</sub>t, respectively, and the resulting WP of around 384.7 kgCO<sub>2</sub> per t of slag, make it a valuable feedstock for MIN<sub>EX</sub> with an expected global potential of 320–870 MtCO<sub>2</sub> per a in 2100.<sup>122</sup> Renforth<sup>122</sup> notes that about 185 t of blast furnace slag and 117 t of steel slag are produced per tonne of crude steel

produced. Through the decarbonisation of steel production, blast furnaces will be phased out and blast furnace slag is therefore not further considered in this work. Production of one tonne of aluminium produces 3.45 t of bauxite residues, that can neutralise 44–66 kgCO<sub>2</sub> per t of bauxite residues.<sup>122</sup> About 115 kg of cement kiln dust are produced per tonne of cement clinker.<sup>122</sup> All these industrial solid wastes may be used for CO<sub>2</sub> mineralisation. In this study, only industrial solid waste is assumed as feedstock to MIN<sub>EX</sub> and additional potential of mined rock, *e.g.*, serpentine or olivine is neglected. Pan *et al.*<sup>61</sup> also emphasise the potential for additional indirectly avoided CO<sub>2</sub> emissions by utilising carbonates as filler material in concrete blocks or cement mortars.

EW potential on agricultural land for the nine major regions considered in this work is determined as follows. The available agricultural land of each country<sup>138</sup> is multiplied by a basalt application rate of 40 t per (ha-a) and a lower as well as higher estimate for the EW efficiency of 0.5 tCO<sub>2</sub> per tRock and 0.67 tCO<sub>2</sub> per tRock, respectively.

## 4. Results

In subsection 4.1, the global potential for MIN<sub>IN</sub>, MIN<sub>EX</sub>, and EW is presented for the nine major regions of LUT-ESTM.<sup>10</sup> Subsection 4.2 elaborates on the techno-economic findings for CO<sub>2</sub> mineralisation, and subsection 4.3 condenses key findings on the technology readiness levels of the mineralisation options. Results are calculated in five-year steps from 2020–2100, though presented for 2030, 2050, and 2070, as the key years. These years provide concise information for times steps decisive for ramping CDR to reach a safe future.<sup>12</sup> Results for all years can be found in Supplementary material 2 (ESI<sup>†</sup>) where all calculations can be traced.

### 4.1. Global-regional mineralisation potential

The global-regional potential for MIN<sub>IN</sub> is depicted in Fig. 4. The global calculated annual injection potential equals about 0.7% per a of the total sequestration capacity. This stems from a combination of area and sequestration potential estimates in Oelkers *et al.*<sup>57</sup> and the assumed area demand for injection of 28 km<sup>2</sup> per (MtCO<sub>2</sub>/a).<sup>133</sup> Some MIN<sub>IN</sub> sequestration locations can only achieve 0.2% per a injection rates due to different geologic characteristics. In Fig. 4, the secondary (right) vertical axis presenting the annual MIN<sub>IN</sub> potential is therefore normalised to 0.7% per a of the maximum total MIN<sub>IN</sub> potential presented on the primary (left) vertical axis. Hence, discrepancies in length of the coloured and black bar, shows discrepancies in the ratio of annual to total sequestration potential.

As can be seen in Fig. 4, all major regions except for Europe, MENA and North America are assumed to have Gt-scale annual injection and MIN<sub>IN</sub> potential. South America shows the highest total and annual potential for MIN<sub>IN</sub> at 543.0 GtCO<sub>2</sub> and 3.9 GtCO<sub>2</sub> per a, respectively. Only Europe and the MENA region show annual potential considerably below 1 GtCO<sub>2</sub> per a. The SAARC region can sequester about 2 GtCO<sub>2</sub> per a. The



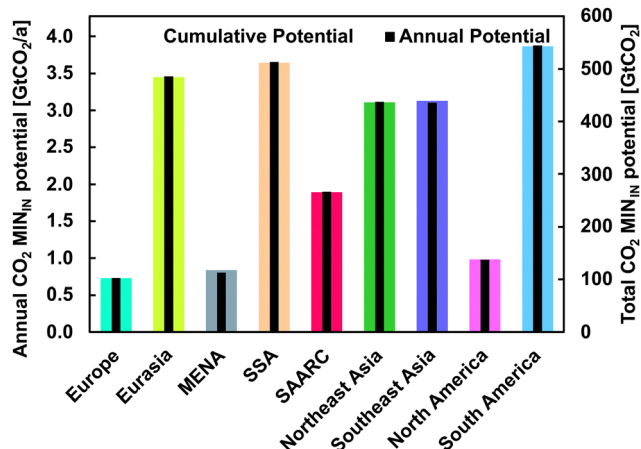


Fig. 4 Global-regional CO<sub>2</sub> *in situ* mineralisation potential. Coloured bars indicate the total sequestration potential and the black bars indicate the annual injection and sequestration potential in each region. The left vertical axis is normalised to 0.7% per a of total potential as derived from the global total and annual sequestration potential. The total sequestration potential is represented by the right vertical axis. Divergences of this average value can be seen in the figure. Further information can be found in the Supplementary material 2 (ESI†).

secondary vertical axis in Fig. 4 indicates that some potential MIN<sub>IN</sub> sites have different estimated height (volume-to-area ratio) which results in a slight divergence in the annual injection rate calculated when using the area demand approximation for CO<sub>2</sub> underground injection provided by Wijaya *et al.*<sup>133</sup>

The annual and cumulative potential for MIN<sub>EX</sub> using industrial solid wastes, *i.e.*, steel slag, cement kiln dust, and red mud, are depicted in Fig. 5. Steelmaking slag occurs also in defossilised processes utilising hydrogen and electric arc furnaces<sup>139</sup> and is, therefore, expected to be available despite the transition to green steel.

SAARC is expected to produce most of the global industrial waste output that can be utilised for CO<sub>2</sub> MIN<sub>EX</sub> by the mid of the 21st century. The global MIN<sub>EX</sub> potential using industrial waste is projected to peak in 2045 at about 584 MtCO<sub>2</sub> per a before declining to 394 MtCO<sub>2</sub> per a by 2100. These results

confirm findings of Pan *et al.*<sup>61</sup> who found a global total direct MIN<sub>EX</sub> potential using alkaline solid wastes of about 310 MtCO<sub>2</sub> per a without considering some countries, especially in South America and Africa. Northeast Asia, especially China, is a major contributor both in results provided by Pan *et al.*<sup>61</sup> and in this study; however results in this study indicate that SAARC and SSA will overtake Northeast Asia in terms of CO<sub>2</sub> mineralisation using alkaline solid wastes. By the end of the 21st century, SSA is projected to be the major producer of industrial waste enabling substantial MIN<sub>EX</sub> at an annual rate of 98 MtCO<sub>2</sub> per a. A total of 37.4 GtCO<sub>2</sub> can be permanently sequestered in carbonates using industrial solid waste as input for MIN<sub>EX</sub>, which confirms the findings by Myers *et al.*<sup>137</sup> It can be seen in Fig. 5 that the potential for MIN<sub>EX,IW</sub> is lowest in Europe, Eurasia, MENA, North America, and South America. The potential projected for Southeast Asia is significantly lower compared to Northeast Asia, SAARC, and SAA where significant economic growth is projected in the LUT-DEES macro-economic scenario.<sup>10</sup>

The technical potential for EW in the nine major regions of LUT-ESTM is depicted in Fig. 6. The EW potential is directly related to the available cropland in each region. Whether the full technical potential of EW on croplands can be realised is uncertain and must be assessed in future studies.

SSA has the highest theoretical EW potential with about 5.5 GtCO<sub>2</sub> per a. North America and SAARC follow with a theoretical EW potential of about 5.3 GtCO<sub>2</sub> per a and 5.2 GtCO<sub>2</sub> per a, respectively. MENA has a theoretical EW potential of about 1.5 GtCO<sub>2</sub> per a, and South America, Southeast Asia, Northeast Asia, Eurasia, and Europe all have average theoretical EW potential in the range of 3.4–4.3 GtCO<sub>2</sub> per a. As EW performance is linked to precipitation, arid regions will show lower sequestration kinetics than humid regions, potentially constraining the annual CDR potential.

#### 4.2. Techno-economic process parameters and cost of carbon sequestration

Subsection 4.2.1 presents findings on the PE demand of different CO<sub>2</sub> mineralisation options. Subsection 4.2.2 then shows the resulting future projected cost of CO<sub>2</sub> mineralisation

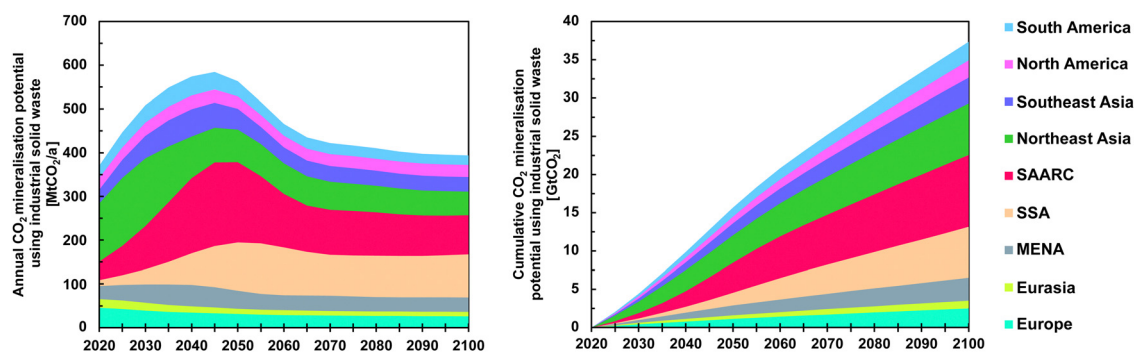


Fig. 5 Global-regional CO<sub>2</sub> *ex situ* mineralisation potential using steel slag, cement kiln dust, and red mud for the nine major regions used in LUT-ESTM.<sup>10</sup> The left panel shows the annual CO<sub>2</sub> mineralisation potential, and the right panel shows the cumulative CO<sub>2</sub> mineralisation potential in the 21st century.



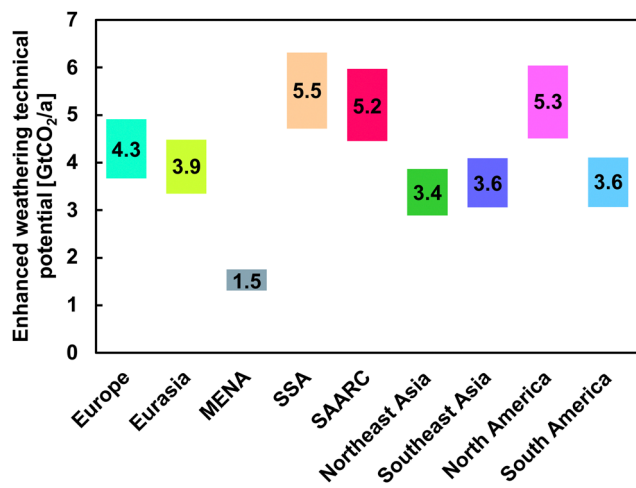


Fig. 6 Global-regional potential for EW using basalt on cropland for the nine LUT-ESTM major regions.<sup>50</sup> The position of the numeric values indicates the mean of the available technical potential range. There is uncertainty in the weathering efficiency when considering soil acidity<sup>140</sup> as weathering rates differ with soil pH. As the average soil pH across the major regions ranges from about 5.7–7.5 (cf. Supplementary material 1 note 3, ESI<sup>†</sup>), this effect is not further considered.

to make these CO<sub>2</sub> mineralisation options suitable for energy-industry-CDR system integration.

**4.2.1. Energy demand of mineralisation options.** Energy and mass balances of processes are crucial for consideration in energy system modelling. The process chains considered for EW, MIN<sub>IN</sub>, and MIN<sub>EX</sub> are depicted in Fig. 1. MIN<sub>IN</sub> requires DAC units close to underground formations suitable for CO<sub>2</sub> injection, assuming rather limited suitability of large-scale CO<sub>2</sub> pipelines. EW requires rock handling with a subsequent spreading step for CDR. MIN<sub>EX</sub>, however, involves both a capture and sequestration step requiring rock handling. The FE demand for mineralisation options for CDR is presented in Fig. 7.

EW is the only mineralisation option that solely relies on electricity. All other options require also heat for DAC and the mineralisation process. Mature technologies for rock mining, transportation, and comminution are assumed to show no reduction in final energy. EW requires the least total FE of about 1.0 MWh per tCO<sub>2</sub>. The total FE demand for MIN<sub>EX</sub> is 3.7 MWh per tCO<sub>2</sub>, 3.3 MWh per tCO<sub>2</sub>, and 2.7 MWh per tCO<sub>2</sub> if serpentine, olivine, and industrial solid waste is used as a feedstock in 2030. The total FE is expected to decrease in the future mainly due to advances in DAC technologies. In 2070, the total FE demand using MIN<sub>EX</sub> is expected to decrease to 3.2 MWh per tCO<sub>2</sub>, 2.9 MWh per tCO<sub>2</sub>, and 2.3 MWh per tCO<sub>2</sub> when using serpentine, olivine, and industrial solid waste, respectively. Using olivine for MIN<sub>EX</sub> results in the lowest mid-temperature heat demand but shows the highest total electricity demand. MIN<sub>IN</sub> requires a total FE supply of about 1.8 MWh per tCO<sub>2</sub> and 1.4 MWh per tCO<sub>2</sub> in 2030 and from 2050 onwards, respectively. While EW shows the lowest total FE demand of all mineralisation options examined in this study, the electricity demand is sensitive to the rock transportation

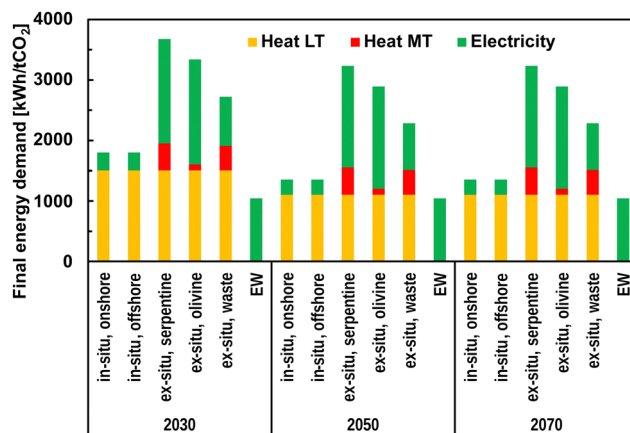


Fig. 7 Final energy demand for mineralisation options for CDR. Final energy demand is clustered in low-temperature heat (Heat LT) for DAC, medium-temperature heat (Heat MT) for the mineralisation process and electricity for feedstock handling, mineralisation process, and DAC. Rock transportation distance for EW and MIN<sub>EX</sub> is assumed to be 200 km.

distance. Increasing the transportation distance from the base assumption of 200 km to 400 km can increase the total FE demand from 1.0 MWh per tCO<sub>2</sub> to 1.9 MWh per tCO<sub>2</sub>. For MIN<sub>EX</sub> options, the longer transportation distance increases the total FE to 4.4 MWh per tCO<sub>2</sub> and 3.9 MWh per tCO<sub>2</sub> when using serpentine and olivine, respectively, in 2030.

The PE demand for CDR with CO<sub>2</sub> mineralisation for long-term stable sequestration is presented in Fig. 8.

The PE demand of MIN<sub>EX</sub> using industrial solid waste is the highest at about 2.1 MWh per tCO<sub>2</sub> in 2030 which declines to 1.8 MWh per tCO<sub>2</sub> and 1.7 MWh per tCO<sub>2</sub>, in 2050 and 2070, respectively. Using serpentine and olivine as feedstock for MIN<sub>EX</sub>, increases the PE demand of mineralisation to 3.2 MWh per tCO<sub>2</sub> and 2.8 MWh per tCO<sub>2</sub>, respectively, in 2030. In 2070, MIN<sub>EX</sub> using mined rocks requires about 2.7 MWh per tCO<sub>2</sub> and 2.4 MWh per tCO<sub>2</sub> for serpentine and olivine, respectively. MIN<sub>IN</sub> does not require feedstock handling and has significantly lower PE demand related to the sequestration process, which results in comparably lower total PE demand of 1.1 MWh per tCO<sub>2</sub>, 0.8 MWh per tCO<sub>2</sub>, and 0.7 MWh per tCO<sub>2</sub> in 2030, 2050, and 2070, respectively. EW has the lowest PE demand at about 1.2 MWh per tCO<sub>2</sub> in 2030; however, the demand increases with the distance of rock transportation. Increased transportation distance from the base assumption of 200 km to 400 km results in a PE demand of 1.9 MWh per tCO<sub>2</sub> in 2030.

**4.2.2. Estimation of future cost for carbon dioxide mineralisation.** The impact of technology learning on the cost of MIN<sub>EX</sub> in a scenario where MIN<sub>EX</sub> is widely deployed for secure CO<sub>2</sub> sequestration (cf. Supplementary material 2, ESI<sup>†</sup>) is depicted in Fig. 9.

The high initial cost related to DAC makes MIN<sub>IN</sub> and MIN<sub>EX</sub> options relatively expensive compared to EW in the short term. MIN<sub>IN</sub> options cost about 123 € per tCO<sub>2</sub> and 131 € per tCO<sub>2</sub> if CO<sub>2</sub> is injected onshore and offshore, respectively, in 2030. The cost is expected to decline to 40 € per tCO<sub>2</sub> and 47 € per tCO<sub>2</sub> for



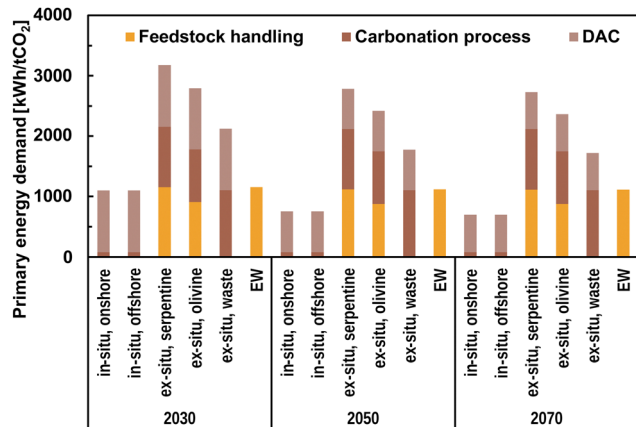


Fig. 8 Primary energy demand for CO<sub>2</sub> mineralisation options in 2030, 2050, and 2070. The energy demand is distinguished between feedstock handling, which includes open-pit mining, transportation, and comminution, energy demand directly related to the sequestration process, such as reactor operation for MIN<sub>EX</sub>, and additional energy demand for DAC. DAC assumptions are taken from Fasih *et al.*<sup>23</sup> and adapted as in Mühlbauer *et al.*<sup>11</sup> The rock transportation distance is assumed to be 200 km for EW and MIN<sub>EX</sub>.

onshore and offshore MIN<sub>IN</sub>, respectively, until 2070. EW costs about 88 € per tCO<sub>2</sub>, 68 € per tCO<sub>2</sub>, and 66 € per tCO<sub>2</sub> in 2030, 2050, and 2070, respectively. Therefore, anticipated future cost decline for DAC makes MIN<sub>IN</sub> cost-competitive with EW starting in 2050. For MIN<sub>EX</sub>, using industrial waste is economically preferable over mined rocks due to the avoided cost for feedstock mining and handling. The cost of MIN<sub>EX</sub> using serpentine, olivine, and industrial solid waste for mineralisation is estimated to be 188 € per tCO<sub>2</sub>, 189 € per tCO<sub>2</sub>, and 182 € per tCO<sub>2</sub>, respectively, in 2030. Until 2070, the costs for those MIN<sub>EX</sub> options are expected to decrease to 74 € per tCO<sub>2</sub>, 73 € per tCO<sub>2</sub>, and 61 € per tCO<sub>2</sub>, respectively. Generally, the LCOCRs of all mineralisation options' are in the range of 50–100 € per tCO<sub>2</sub> from 2050 onwards, making mineralisation an economically viable option for safe and long-term CO<sub>2</sub>

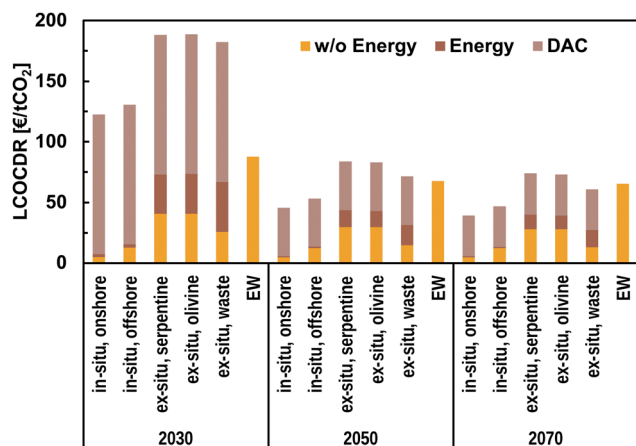


Fig. 9 Future estimations of the levelised cost of CDR (LCOCDR) with secure CO<sub>2</sub> sequestration *via* mineralisation. Projected DAC cost are adapted from Mühlbauer *et al.*<sup>11</sup>

sequestration. Future cost projections are uncertain, and those findings will need re-evaluation once technologies such as DAC become more mature and robust cost estimates are publicly available. Technology learning is only assumed for MIN<sub>EX</sub>, as both MIN<sub>IN</sub> and EW can build fully on well-established and mature technologies used in mining and fossil fuel extraction.

#### 4.3. Technology readiness

TRL is an important measure for energy system modelling to project future technology development. As Young *et al.*<sup>141</sup> find, low-TRL technologies often experience cost escalations before becoming mature (high TRL) technologies, which show technology learning reducing the cost.<sup>127</sup> Rock mining and handling is a well-established industry with mature technology. Furthermore, EW relies solely on relatively simple technology requiring feedstock mining, handling, transportation, and spreading.<sup>11,31,32</sup> The TRL of EW can therefore be assessed at high level of 8–9. MIN<sub>EX</sub>, in contrast, requires a specialised reactor, and no large-scale plants have been reported yet. Consequently, the TRL is lower compared to EW at a level of 5–6. MIN<sub>IN</sub> generally builds on well-established technologies such as deep drilling and fluid injection that are used for geothermal energy, fossil fuel extraction or enhanced oil and gas recovery. While the subsurface reservoir is different, there are already several relatively large-scale operations proofing the concept on a TRL of 8–9.<sup>142</sup>

#### 4.4. Cost and primary energy demand of large-scale mineralisation

The marginal energy demand and cost of CDR options with long-term CO<sub>2</sub> sequestration *via* mineralisation are presented in subsections 4.2.1 and 4.2.2, respectively. Also, mineralisation is evaluated to be ready to satisfy a major share of future CDR demand to achieve ambitious climate targets (*cf.* subsection 4.3). The results for the assumptions mentioned above are presented in Table 2.

The cost of large-scale mineralisation deployment for long-term CO<sub>2</sub> sequestration is about 69.1 b€ in 2050 and increases to 333.4 b€ in 2070 due to a fully ramped CDR sector in a trajectory compliant with limiting long-term global warming to 1.5 °C. For more ambitious targets, *i.e.*, limiting global warming to 1.0 °C, the cost increase to 241.7 b€ and 1166.9 b€ in 2050 and 2070, respectively. If these results are put into perspective with the projected total GDP, the cost of sequestering 60% of projected CDR demand long-term in stable materials is estimated at 0.06% and 0.21% of the GDP for the 1.5 °C and 1.0 °C trajectories, respectively.

Primary energy demand for CO<sub>2</sub> mineralisation in the discussed case amounts to about 1.3 PWh and 6.7 PWh in 2050 and 2070, respectively, for the 1.5 °C climate target. For the 1.0 °C target, the primary energy demand increases to about 4.5 PWh in 2050 and 23.4 PWh in 2070. This increase implies additional primary energy demand compared to the basic energy-industry system of 2.46% and 8.6% in 2070 for a 1.5 °C and 1.0 °C climate target, respectively.



**Table 2** Total energy demand and cost for large-scale mineralisation for long-term CO<sub>2</sub> sequestration. MIN<sub>IN</sub> offshore and MIN<sub>IN</sub> onshore are assigned 20% of CDR contribution each. MIN<sub>EX</sub> with serpentine, olivine, and industrial solid waste are assigned 3.3% each and EW is assigned 10% of total CDR demand. Therefore, mineralisation would sequester 60% of the total CDR demand. Further information can be found in the Supplementary material 2 (ESI)

	Unit	1.5 °C target <sup>a</sup>		1.0 °C target <sup>a</sup>		
		2050	2070	2050	2070	
Cost	Total GDP (LUT-DEES)	b€	340,827	566,658	340,827	566,658
	Total annualised cost mineralisation	b€	69.1	333.4	241.7	1166.9
	Share in projected total GDP	%	0.02	0.06	0.07	0.21
Energy	Primary energy demand energy-industry system	PWh	192.4	271.7	192.4	271.7
	Primary energy demand mineralisation	PWh	1.3	6.7	4.5	23.4
	Share in projected total primary energy demand	%	0.67%	2.46%	2.34%	8.60%

<sup>a</sup> The CDR demand is adapted from Keiner *et al.*<sup>10</sup> and Breyer *et al.*<sup>12</sup> for a climate target at the end of this century, limiting global warming to 1.5 °C and 1.0 °C. The 1.5 °C target assumes a total CDR demand of 500 GtCO<sub>2</sub>, the 1.0 °C target 1750 GtCO<sub>2</sub>.

## 5. Discussion

The discussion section focuses on the implications drawn from the presented results (subsection 5.1), the key issue of permanence of CDR (subsection 5.2), and the limitations and the research outlook (subsection 5.3) of this study.

### 5.1. Implications from the results

As concluded in a recent study,<sup>11</sup> CO<sub>2</sub> mineralisation shows the highest permanence and safety, *i.e.*, permanent CO<sub>2</sub> sequestration, at a cost-competitive level compared to other CDR options. While there is still significant uncertainty in the global potentials of the options, the presented results indicate that all CDR from NETs based on captured dilute atmospheric CO<sub>2</sub> and concentrated gaseous CO<sub>2</sub> as intermediate step can be realised with the safe sequestration of CO<sub>2</sub> in carbonates *via* mineralisation.

The required energy for CO<sub>2</sub> mineralisation would lead to gross emissions in the fossil fuel-dominated energy system.<sup>63</sup> Resulting low carbon efficiencies would make net CDR significantly more expensive and emphasises the priority of a rapid defossilisation of the current energy-industry system and future energy-industry-CDR system before large-scale CDR with DAC and CO<sub>2</sub> mineralisation can be implemented effectively.<sup>12,17</sup> The need for raw material seems negligible for MIN<sub>IN</sub> but is significant for MIN<sub>EX</sub>, with mined rocks, and EW. Both technologies can at least partially build on existing infrastructures; however, the satisfaction of raw material demand should be questioned carefully on the background of substantial pressure on material availability.<sup>143</sup>

As shown in previous work, CO<sub>2</sub>-to-solid processes can play a major role in future CDR endeavours if the security of CO<sub>2</sub> sequestration is prioritised.<sup>11</sup> Safe and long-term sequestration of atmospheric CO<sub>2</sub> will be key to achieve ambitious climate targets to enable a safe future within planetary boundaries.<sup>12,13</sup>

CO<sub>2</sub> mineralisation options in general, and MIN<sub>EX</sub> in particular, show higher cost and energy demand compared to geological underground sequestration of CO<sub>2</sub> or afforestation.<sup>11</sup> However, non-permanent CDR such as afforestation and potentially geological underground CO<sub>2</sub> sequestration come with

several challenges including complicated and challenging accounting and subsequent monetary compensation and the risk of potential leakage, respectively.<sup>21,144</sup> As stated by Vielstädt *et al.*,<sup>52</sup> former hydrocarbon extraction sites with multiple injection wells may not always be suitable for geologic CO<sub>2</sub> sequestration due to potential leakage.

Alternative pathways to produce solid materials from atmospheric CO<sub>2</sub> have been presented in previous works with electricity-based silicon carbide and carbon fibres as promising options.<sup>45,46</sup> The business-case of selling by-products from MIN<sub>EX</sub> and potential synergies with the cement industry to reduce the cost of CO<sub>2</sub> sequestration has been elaborated,<sup>55,130</sup> however, MIN<sub>EX</sub> is less dependent on a market and demand for by-products compared to electricity-based silicon carbide and carbon fibres, which are considerably more energy- and cost-intensive.<sup>45,46</sup> Nevertheless, MIN<sub>EX</sub> is largely constrained by the availability of industrial waste because mined rocks for carbonation make the approach significantly more expensive.

Further technologies relying on CO<sub>2</sub> mineralisation for removal and sequestration of atmospheric CO<sub>2</sub> have been proposed. Repeated ambient weathering of MgO for DAC was studied<sup>63,141,145</sup> and is found to be a cost-competitive alternative to other DAC technologies.

Due to the high potential demand for minerals, concerns such as mineral poverty should be considered throughout the discussion of geochemical measures for CDR.<sup>143</sup> However, in most literature, a large potential for CO<sub>2</sub> mineralisation is presented (*cf.* section 2) and even a fraction of that could be sufficient to enable the safe sequestration of CO<sub>2</sub> at the scale required for a 1.5 °C or 1.0 °C climate target. Future LCAs will be needed to thoroughly determine the impacts of different mineralisation options on the environment. The insights of such studies can be utilised to enhance the implications on future CDR portfolios for different societal preferences.<sup>11</sup>

While the additional primary energy demand is significant, renewable and clean energy sources, *i.e.*, wind and especially solar photovoltaic, are on a promising trajectory to supply abundant low-cost electricity. It is not expected that large-scale CDR for ambitious climate targets is adversely affected by a possible limitation due to the availability of renewable electricity.<sup>146</sup> As the additional demand in 2050 for electricity is



limited to about 0.67% and 2.34% of projected total PE demand for a 1.5 °C target and a 1.0 °C target, respectively, the deployment of CDR, especially mineralisation, is not expected to significantly hamper the energy transition of other sectors such as power, transport, or industry through competition for renewable electricity.

CO<sub>2</sub> mineralisation faces several current challenges. MIN<sub>IN</sub> or direct aqueous MIN<sub>EX</sub> are currently operated with potable freshwater.<sup>44,119</sup> This may severely compromise the sustainable potential of these operation considering the rising challenges in the global freshwater scarcity. MIN<sub>IN</sub> may be operated with seawater instead of freshwater in the foreseeable future<sup>44</sup> and MIN<sub>EX</sub> shows a high water recovery rate<sup>119</sup> which should further be improved to solve water demand issues. EW has some sustainability issues considering potential health threats through dispersion of ultrafine particles<sup>32</sup> or particles which are potentially contaminated, which calls for stringent management of operations and use of non-hazardous waste only<sup>102</sup> in the future.

### 5.2. Permanence and timing of mineralisation

Mineralisation produces solid materials from gaseous atmospheric CO<sub>2</sub>. The permanence of CO<sub>2</sub> sequestration in carbonates is well documented.<sup>20,65</sup> While EW and MIN<sub>EX</sub> can deliver permanent CDR as well as desirable co-benefits, MIN<sub>IN</sub> shows relatively low cost and energy demand and can be an attractive alternative to geologic sequestration as commonly proposed and often 'over used' in IAM scenarios.<sup>147</sup> Geologic sequestration comes with several challenges. Fossil fuel producers that now own depleted reservoirs will benefit from underground sequestration of CO<sub>2</sub> in their sites. This starkly contradicts the polluters-pay approach that is often proposed in the context of CO<sub>2</sub> emissions<sup>148</sup> by providing an attractive business case for fossil fuel producers for both polluting and restoring the atmosphere.

One public concern regarding geologic CO<sub>2</sub> sequestration is the risk of potential leakage<sup>87,149</sup> that imposes significant risk to the environment and of morbidity.<sup>150,151</sup> This risk requires significant efforts to actively monitor sequestration sites.<sup>152,153</sup> For example, similar to nuclear power plants in Germany, there are currently no options for insuring geologic sequestration projects.<sup>154</sup> Although there are no major leakage events reported so far, the risk is acknowledged and more investigation and research on the topic are needed.<sup>155</sup> Non-permanent CDR options are difficult to properly account<sup>21,144</sup> and, in light of the above-mentioned uncertainties regarding geologic sequestration, CO<sub>2</sub> mineralisation can be a key technology in sustainable large-scale CDR.

### 5.3. Limitations and research outlook

Even though the CO<sub>2</sub> mineralisation potentials are elaborated on a global and regional basis, further improving the spatial resolution is necessary to provide effective guidance to decision makers. However, since the required data is still not sufficient,<sup>57</sup> providing potential estimations for all CO<sub>2</sub> mineralisation options that are currently discussed in a

comprehensive manner will advance the discussion about CO<sub>2</sub> mineralisation for permanent CDR. Precisely mapping technical, economic, and sustainable potentials is yet to be conducted in regional level assessments. Missing data indicates the requirement of field trials and further endeavours to precisely estimate the potential of underground MIN<sub>IN</sub> sites globally in high spatial resolution. The CO<sub>2</sub> mineralisation potential projection for the 21st century in conjunction with techno-economic parameters will enable future energy-industry-CDR system transition analyses.

A static techno-economic framework is chosen to evaluate the cost and energy demand for large-scale CO<sub>2</sub> mineralisation enabling permanent CDR on the large scale. Therefore, results of this study are intended to advance the consideration of CO<sub>2</sub> mineralisation in energy-industry-CDR systems by providing the required data, but the results should be validated in comprehensive system transition optimisation studies and LCAs. Further developments of CO<sub>2</sub> mineralisation options in energy demand are omitted and should be further studied in specialised assessments. This also relates to the consideration of local parameters such as soil pH on the weathering rate for EW mineralisation. Future research with a high spatial resolution will be required to assess mineralisation options in full global-local detail.

## 6. Conclusions

This work provides a techno-economic assessment as well as estimations for the global-regional potential of the CO<sub>2</sub> mineralisation options with high probability to shape the future energy-industry-carbon dioxide removal system if a safe and long-term sequestration of atmospheric CO<sub>2</sub> is desired. Three main pillars of CO<sub>2</sub> mineralisation can play a significant role in future energy-industry-carbon dioxide removal systems: enhanced weathering, *in situ* mineralisation, and *ex situ* mineralisation. Enhanced weathering can be implemented on agricultural crop land or marginal hinterland as a potentially no-regret option for carbon dioxide removal. *in situ* mineralisation is similar to geologic underground sequestration, but it requires different sequestration sites that enable the rapid mineralisation and therefore safe long-term sequestration at elevated temperature and pressure of CO<sub>2</sub> in aqueous solution. These suitable sequestration sites are composed of basaltic rocks or peridotite, are distributed globally, and show sufficient CO<sub>2</sub> mineralisation potential. At similar cost and energy demand to geological underground sequestration, *in situ* mineralisation of CO<sub>2</sub> provides an attractive alternative. *ex situ* mineralisation is the option investigated with highest cost and energy demand. Mined rocks must be transported, crushed, grinded, eventually pre-treated, and then mineralised in special reactors. Alternatively, industrial wastes of steelmaking, among others, can be used for *ex situ* mineralisation.

The *in situ* mineralisation adds a moderate extra energy demand and cost required to direct air capture of CO<sub>2</sub> enabling safe and long-term atmospheric CO<sub>2</sub> sequestration. The cost of



all mineralisation options for permanent CDR is expected to fall below 100 € per tCO<sub>2</sub> by 2050 while enhanced weathering will likely reach that threshold by 2030. The primary energy demand for CDR *via* CO<sub>2</sub> mineralisation is lowest for enhanced weathering, which does not require any direct air CO<sub>2</sub> capture operations or powering a reactor as it only requires feedstock mining and spreading. At about 1150 kWh per tCO<sub>2</sub>, enhanced weathering would add moderate additional primary energy demand on the future projected demand. *in situ* mineralisation requires similar primary energy at about 1100 kWh per tCO<sub>2</sub> in 2030, which is expected to decrease mainly due to improvements in direct air CO<sub>2</sub> capture in the long term. While direct air CO<sub>2</sub> capture constitutes about 50% of the total primary energy demand, *ex situ* mineralisation for carbon dioxide removal requires about 2100–3200 kWh per tCO<sub>2</sub> in 2030, which reduces to about 1700–2700 kWh per tCO<sub>2</sub> in 2070. The primary energy demand of mineralisation options must be considered for the determination of future carbon dioxide removal portfolios, but the sharply declining cost of renewable energy makes other indicators, which must be studied in dedicated life cycle assessments, potentially more important. *in situ* mineralisation is already conducted commercially on industrial scale and is considered to be on an advanced technology readiness level of 8 or 9. While enhanced weathering and *ex situ* mineralisation are not yet deployed on significant scale, both options rely on established technology with the exception of aqueous carbonation reactors.

Large-scale deployment of mineralisation to contribute a 60% share of total carbon dioxide removal endeavours necessary to achieve ambitious climate targets is shown to be manageable at a share of 0.06% and 0.21% in projected gross domestic product until 2070 for a 1.5 °C and 1.0 °C temperature target, respectively. The total energy demand for mineralisation in this case requires about 2.5% and 8.6% additional primary energy demand compared to the total primary energy demand for all other sectors. While this demand is substantial, current development of cost and deployment of clean, renewable sources such as wind power and solar photovoltaics can support additional primary energy demand for safe CO<sub>2</sub> sequestration. Also, due to the limited additional demand in 2050, *i.e.*, 0.67% and 2.34% for the 1.5 °C and 1.0 °C temperature target, respectively, additional primary energy demand for CO<sub>2</sub> mineralisation is not expected to substantially hinder the defossilisation of all other sectors until 2050. Possible synergies of by-products are discussed.

With this work, a first step for implementation of CO<sub>2</sub> mineralisation for permanent carbon dioxide removal in modelling frameworks for investigating the characteristics of future energy-industry-carbon dioxide removal systems is taken. Future iterations of techno-economic and potential assumptions for the presented technology options will further reduce uncertainty that exists at this early stage of development in CO<sub>2</sub> mineralisation and carbon dioxide removal in general. Permanent carbon dioxide removal *via* CO<sub>2</sub> mineralisation can be a most valuable endeavour to reach ambitious climate targets that should be considered for the transition phase, which

include large-scale carbon dioxide removal in a 100% renewable post-fossil energy-industry-carbon dioxide removal system.

## Nomenclature

BECCS	Bioenergy with carbon capture and sequestration
Ca	Calcium
CAPEX	Capital expenditures
CDR	Carbon dioxide removal
CO <sub>2</sub>	Carbon dioxide
DAC	Direct air capture
DACCS	Direct air carbon capture and sequestration
EW	Enhanced weathering
FE	Final energy
IAM	Integrated assessment model
IPCC	Intergovernmental Panel on Climate Change
LCA	Life cycle assessment
LCOCDR	Levelised cost of carbon dioxide removal
MENA	Middle East and North Africa
Mg	Magnesium
MIN <sub>EX</sub>	<i>Ex situ</i> mineralisation
MIN <sub>IN</sub>	<i>In situ</i> mineralisation
NCS	Natural climate solutions
NET	Negative emission technology
OPEX	Operational expenditures
OPEX <sub>fix</sub>	Fixed operational expenditures
OPEX <sub>var</sub>	Variable operational expenditures
PE	Primary energy demand
SAARC	South Asian Association for Regional Cooperation
SSA	Sub-Saharan Africa
TNE	Total negative emissions
TRL	Technology readiness level
UN	United Nations
WP	Weathering potential

## Data availability

The data supporting this article have been included as part of the ESI.†

## Conflicts of interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Acknowledgements

The authors gratefully acknowledge the public financing of the Research Council of Finland for the 'Industrial Emissions & CDR' project under the number 343053 which partly funded this research. Dominik Keiner would like to thank the Jenny and Antti Wihuri Foundation for the valuable grant. The authors would like to thank Gabriel Lopez for proofreading.



## References

- [IPCC] - Intergovernmental Panel on Climate Change, Climate Change 2023: Synthesis Report. Contribution of Working Groups I, II and III to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change, Intergovernmental Panel on Climate Change (IPCC), Geneva, Switzerland, First., 2023.
- B. H. Kreps, *Am. J. Econ. Sociol.*, 2020, **79**, 695–717, DOI: [10.1111/ajes.12336](https://doi.org/10.1111/ajes.12336).
- B. Clarke, F. Otto, R. Stuart-Smith and L. Harrington, *Environ. Res. Clim.*, 2022, **1**, 012001, DOI: [10.1088/2752-5295/ac6e7d](https://doi.org/10.1088/2752-5295/ac6e7d).
- C. Breyer, S. Khalili, D. Bogdanov, M. Ram, A. S. Oyewo, A. Aghahosseini, A. Gulagi, A. A. Solomon, D. Keiner, G. Lopez, P. A. Ostergaard, H. Lund, B. V. Mathiesen, M. Z. Jacobson, M. Victoria, S. Teske, T. Pregger, V. Fthenakis, M. Rauegi, H. Holttinen, U. Bardi, A. Hoekstra and B. K. Sovacool, *IEEE Access*, 2022, **10**, 78176–78218, DOI: [10.1109/ACCESS.2022.3193402](https://doi.org/10.1109/ACCESS.2022.3193402).
- G. Luderer, S. Madeddu, L. Merfort, F. Ueckerdt, M. Pehl, R. Pietzcker, M. Rottoli, F. Schreyer, N. Bauer, L. Baumstark, C. Bertram, A. Dirnmaier, F. Humpenöder, A. Levesque, A. Popp, R. Rodrigues, J. Strefler and E. Kriegler, *Nat. Energy*, 2021, **7**, 32–42, DOI: [10.1038/s41560-021-00937-z](https://doi.org/10.1038/s41560-021-00937-z).
- [IPCC] - Intergovernmental Panel on Climate Change, Climate Change 2022: Mitigation of Climate Change. Contribution of Working Group III to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change, Cambridge University Press, Cambridge, UK and New York, NY, USA, 2022.
- M. W. Jones, G. P. Peters, T. Gasser, R. M. Andrew, C. Schwingshackl, J. Gütschow, R. A. Houghton, P. Friedlingstein, J. Pongratz and C. L. Quéré, *Sci. Data*, 2023, **10**, 155, DOI: [10.1038/s41597-023-02041-1](https://doi.org/10.1038/s41597-023-02041-1).
- H. J. Buck, W. Carton, J. F. Lund and N. Markusson, *Nat. Clim. Change*, 2023, **13**, 351–358, DOI: [10.1038/s41558-022-01592-2](https://doi.org/10.1038/s41558-022-01592-2).
- S. Smith, O. Geden, G. F. Nemet, M. Gidden, W. F. Lamb, C. Powis, R. Bellamy, M. Callaghan, A. Cowie, E. Cox, S. Fuss, T. Gasser, G. Grassi, J. Greene, S. Lück, A. Mohan, F. Muller-Hansen, G. Peters, Y. Pratama, T. Repke, K. Riahi, F. Schenuit, J. Steinhauser, J. Strefler, J. M. Valenzuela and J. C. Minx, *The State of Carbon Dioxide Removal - 1st Edition*, 2023.
- D. Keiner, A. Gulagi and C. Breyer, *Energy*, 2023, **272**, 127199, DOI: [10.1016/j.energy.2023.127199](https://doi.org/10.1016/j.energy.2023.127199).
- A. Mühlbauer, D. Keiner, C. Gerhards, M. Sterner and C. Breyer, Submitted.
- C. Breyer, D. Keiner, B. W. Abbott, J. L. Bamber, F. Creutzig, C. Gerhards, A. Mühlbauer, G. F. Nemet and Ö. Terli, *Plos Clim.*, 2023, **2**, e0000234, DOI: [10.1371/journal.pclm.0000234](https://doi.org/10.1371/journal.pclm.0000234).
- J. Rockström, J. Gupta, D. Qin, S. J. Lade, J. F. Abrams, L. S. Andersen, D. I. Armstrong McKay, X. Bai, G. Bala, S. E. Bunn, D. Ciobanu, F. DeClerck, K. Ebi, L. Gifford, C. Gordon, S. Hasan, N. Kanie, T. M. Lenton, S. Loriani, D. M. Liverman, A. Mohamed, N. Nakicenovic, D. Obura, D. Ospina, K. Prodani, C. Rammelt, B. Sakschewski, J. Scholtens, B. Stewart-Koster, T. Tharammal, D. Van Vuuren, P. H. Verburg, R. Winkelmann, C. Zimm, E. M. Bennett, S. Bringezu, W. Broadgate, P. A. Green, L. Huang, L. Jacobson, C. Ndehedehe, S. Pedde, J. Rocha, M. Scheffer, L. Schulte-Uebbing, W. De Vries, C. Xiao, C. Xu, X. Xu, N. Zafra-Calvo and X. Zhang, *Nature*, 2023, **619**, 102–111, DOI: [10.1038/s41586-023-06083-8](https://doi.org/10.1038/s41586-023-06083-8).
- J. Hansen, M. Sato, P. Kharecha, K. von Schuckmann, D. J. Beerling, J. Cao, S. Marcott, V. Masson-Delmotte, M. J. Prather, E. J. Rohling, J. Shakun, P. Smith, A. Lacis, G. Russell and R. Ruedy, *Earth Syst. Dyn.*, 2017, **8**, 577–616, DOI: [10.5194/esd-8-577-2017](https://doi.org/10.5194/esd-8-577-2017).
- D. I. Armstrong McKay, A. Staal, J. F. Abrams, R. Winkelmann, B. Sakschewski, S. Loriani, I. Fetzer, S. E. Cornell, J. Rockström and T. M. Lenton, *Science*, 2022, **377**, eabn7950, DOI: [10.1126/science.abn7950](https://doi.org/10.1126/science.abn7950).
- N. Wunderling, R. Winkelmann, J. Rockström, S. Loriani, D. I. Armstrong McKay, P. D. L. Ritchie, B. Sakschewski and J. F. Donges, *Nat. Clim. Change*, 2023, **13**, 75–82, DOI: [10.1038/s41558-022-01545-9](https://doi.org/10.1038/s41558-022-01545-9).
- B. W. Abbott, C. Abrahamian, N. Newbold, P. Smith, M. Merritt, S. S. Sayedi, J. Bekker, M. Greenhalgh, S. Gilbert, M. King, G. Lopez, N. Zimmermann and C. Breyer, *Earths Future*, 2023, **11**, e2023EF003639, DOI: [10.1029/2023EF003639](https://doi.org/10.1029/2023EF003639).
- [IPCC] - Intergovernmental Panel on Climate Change, Mineral carbonation and industrial uses of carbon dioxide, IPCC, 2018.
- D. Sandalow, R. Aines, J. Friedmann, P. Kelemen, C. McCormick, I. M. Power, B. Schmidt and W. Siobhan, *Carbon Mineralization Roadmap, ICEF Innovation Roadmap Project*, 2021.
- S. Chiquier, P. Patrizio, M. Bui, N. Sunny and N. Mac Dowell, *Energy Environ. Sci.*, 2022, **15**, 4389–4403, DOI: [10.1039/D2EE01021F](https://doi.org/10.1039/D2EE01021F).
- A. Prado and N. Mac Dowell, *Joule*, 2023, **7**, 700–712, DOI: [10.1016/j.joule.2023.03.006](https://doi.org/10.1016/j.joule.2023.03.006).
- B. W. Griscom, J. Adams, P. W. Ellis, R. A. Houghton, G. Lomax, D. A. Miteva, W. H. Schlesinger, D. Shoch, J. V. Siikamäki, P. Smith, P. Woodbury, C. Zganjar, A. Blackman, J. Campari, R. T. Conant, C. Delgado, P. Elias, T. Gopalakrishna, M. R. Hamsik, M. Herrero, J. Kiesecker, E. Landis, L. Laestadius, S. M. Leavitt, S. Minnemeyer, S. Polasky, P. Potapov, F. E. Putz, J. Sanderman, M. Silvius, E. Wollenberg and J. Fargione, *Proc. Natl. Acad. Sci. U. S. A.*, 2017, **114**, 11645–11650, DOI: [10.1073/pnas.1710465114](https://doi.org/10.1073/pnas.1710465114).
- M. Fasihi, O. Efimova and C. Breyer, *J. Cleaner Prod.*, 2019, **224**, 957–980, DOI: [10.1016/j.jclepro.2019.03.086](https://doi.org/10.1016/j.jclepro.2019.03.086).
- C. Breyer, M. Fasihi, C. Bajamundi and F. Creutzig, *Joule*, 2019, **3**, 2053–2057, DOI: [10.1016/j.joule.2019.08.010](https://doi.org/10.1016/j.joule.2019.08.010).
- M. Sendi, M. Bui, N. Mac Dowell and P. Fennell, *One Earth*, 2022, **5**, 1153–1164, DOI: [10.1016/j.oneear.2022.09.003](https://doi.org/10.1016/j.oneear.2022.09.003).
- S. V. Hanssen, V. Daioglou, Z. J. N. Steinmann, J. C. Doelman, D. P. Van Vuuren and M. A. J. Huijbregts,





- Nat. Clim. Change*, 2020, **10**, 1023–1029, DOI: [10.1038/s41558-020-0885-y](https://doi.org/10.1038/s41558-020-0885-y).
- 27 S. V. Hanssen, Z. J. N. Steinmann, V. Daioglou, M. Čengić, D. P. V. Vuuren and M. A. J. Huijbregts, *GCB Bioenergy*, 2022, **14**, 307–321, DOI: [10.1111/gcbb.12911](https://doi.org/10.1111/gcbb.12911).
- 28 Z. Ai, N. Hanasaki, V. Heck, T. Hasegawa and S. Fujimori, *Nat. Sustainability*, 2021, **4**, 884–891, DOI: [10.1038/s41893-021-00740-4](https://doi.org/10.1038/s41893-021-00740-4).
- 29 J. S. Næss, O. Cavalett and F. Cherubini, *Nat. Sustainability*, 2021, **4**, 525–536.
- 30 D. J. Beerling, J. R. Leake, S. P. Long, J. D. Scholes, J. Ton, P. N. Nelson, M. Bird, E. Kantzas, L. L. Taylor, B. Sarkar, M. Kelland, E. DeLucia, I. Kantola, C. Müller, G. Rau and J. Hansen, *Nat. Plants*, 2018, **4**, 138–147, DOI: [10.1038/s41477-018-0108-y](https://doi.org/10.1038/s41477-018-0108-y).
- 31 D. J. Beerling, E. P. Kantzas, M. R. Lomas, P. Wade, R. M. Eufrazio, P. Renforth, B. Sarkar, M. G. Andrews, R. H. James, C. R. Pearce, J.-F. Mercure, H. Pollitt, P. B. Holden, N. R. Edwards, M. Khanna, L. Koh, S. Quegan, N. F. Pidgeon, I. A. Janssens, J. Hansen and S. A. Banwart, *Nature*, 2020, **583**, 242–248, DOI: [10.1038/s41586-020-2448-9](https://doi.org/10.1038/s41586-020-2448-9).
- 32 J. Strefler, T. Amann, N. Bauer, E. Kriegler and J. Hartmann, *Environ. Res. Lett.*, 2018, **13**, 034010, DOI: [10.1088/1748-9326/aaa9c4](https://doi.org/10.1088/1748-9326/aaa9c4).
- 33 D. S. Goll, P. Ciais, T. Amann, W. Buermann, J. Chang, S. Eker, J. Hartmann, I. Janssens, W. Li, M. Obersteiner, J. Penuelas, K. Tanaka and S. Vicca, *Nat. Geosci.*, 2021, **14**, 545–549, DOI: [10.1038/s41561-021-00798-x](https://doi.org/10.1038/s41561-021-00798-x).
- 34 J. Lehmann, A. Cowie, C. A. Masiello, C. Kammann, D. Woolf, J. E. Amonette, M. L. Cayuela, M. Camps-Arbestain and T. Whitman, *Nat. Geosci.*, 2021, **14**, 883–892, DOI: [10.1038/s41561-021-00852-8](https://doi.org/10.1038/s41561-021-00852-8).
- 35 J. Strefler, N. Bauer, F. Humpeöder, D. Klein, A. Popp and E. Kriegler, *Environ. Res. Lett.*, 2021, **16**, 074021, DOI: [10.1088/1748-9326/ac0a11](https://doi.org/10.1088/1748-9326/ac0a11).
- 36 S. Fuss, J. G. Canadell, P. Ciais, R. B. Jackson, C. D. Jones, A. Lyngfelt, G. P. Peters and D. P. V. Vuuren, *One Earth*, 2020, **3**, 145–149, DOI: [10.1016/j.oneear.2020.08.002](https://doi.org/10.1016/j.oneear.2020.08.002).
- 37 J. Fuhrman, C. Bergero, M. Weber, S. Monteith, F. M. Wang, A. F. Clarens, S. C. Doney, W. Shobe and H. McJeon, *Nat. Clim. Change*, 2023, **13**, 341–350, DOI: [10.1038/s41558-023-01604-9](https://doi.org/10.1038/s41558-023-01604-9).
- 38 S. Sri Shalini, K. Palanivelu, A. Ramachandran and R. Vijaya, *Biomass Convers. Biorefinery*, 2021, **11**, 2247–2267, DOI: [10.1007/s13399-020-00604-5](https://doi.org/10.1007/s13399-020-00604-5).
- 39 J. Mertens, C. Breyer, K. Arning, A. Bardow, R. Belmans, A. Dibenedetto, S. Erkman, J. Griepkoven, G. Léonard, S. Nizou, D. Pant, A. S. Reis-Machado, P. Styring, J. Vente, M. Webber and C. J. Sapart, *Joule*, 2023, **7**, 442–449, DOI: [10.1016/j.joule.2023.01.005](https://doi.org/10.1016/j.joule.2023.01.005).
- 40 T. Galimova, M. Ram, D. Bogdanov, M. Fasihi, S. Khalili, A. Gulagi, H. Karjunen, T. N. O. Mensah and C. Breyer, *J. Cleaner Prod.*, 2022, **373**, 133920, DOI: [10.1016/j.jclepro.2022.133920](https://doi.org/10.1016/j.jclepro.2022.133920).
- 41 G. Lopez, D. Keiner, M. Fasihi, T. Koironen and C. Breyer, *Energy Environ. Sci.*, 2023, **16**, 2879–2909, DOI: [10.1039/D3EE00478C](https://doi.org/10.1039/D3EE00478C).
- 42 P. Gabrielli, M. Gazzani and M. Mazzotti, *Ind. Eng. Chem. Res.*, 2020, **59**, 7033–7045, DOI: [10.1021/acs.iecr.9b06579](https://doi.org/10.1021/acs.iecr.9b06579).
- 43 R. Sacchi, V. Becattini, P. Gabrielli, B. Cox, A. Dirnaichner, C. Bauer and M. Mazzotti, *Nat. Commun.*, 2023, **14**, 3989, DOI: [10.1038/s41467-023-39749-y](https://doi.org/10.1038/s41467-023-39749-y).
- 44 S. Ó. Snæbjörnsdóttir, B. Sigfússon, C. Marieni, D. Goldberg, S. R. Gislason and E. H. Oelkers, *Nat. Rev. Earth Environ.*, 2020, **1**, 90–102, DOI: [10.1038/s43017-019-0011-8](https://doi.org/10.1038/s43017-019-0011-8).
- 45 A. Mühlbauer, D. Keiner, T. Galimova and C. Breyer, *Mitig. Adapt. Strateg. Glob. Change*, 2024, **29**, 4, DOI: [10.1007/s11027-023-10100-6](https://doi.org/10.1007/s11027-023-10100-6).
- 46 D. Keiner, A. Mühlbauer, G. Lopez, T. Koironen and C. Breyer, *Mitig. Adapt. Strateg. Glob. Change*, 2023, **28**, 52, DOI: [10.1007/s11027-023-10090-5](https://doi.org/10.1007/s11027-023-10090-5).
- 47 X. Liu, X. Wang, G. Licht and S. Licht, *J. CO<sub>2</sub> Util.*, 2020, **36**, 288–294, DOI: [10.1016/j.jcou.2019.11.019](https://doi.org/10.1016/j.jcou.2019.11.019).
- 48 J. H. Lee, J. H. Lee, I. K. Park and C. H. Lee, *J. CO<sub>2</sub> Util.*, 2018, **26**, 522–536, DOI: [10.1016/j.jcou.2018.06.007](https://doi.org/10.1016/j.jcou.2018.06.007).
- 49 C. Molina-Jirón, M. R. Chellali, C. N. S. Kumar, C. Kübel, L. Velasco, H. Hahn, E. Moreno-Pineda and M. Ruben, *ChemSusChem*, 2019, **12**, 3509–3514, DOI: [10.1002/cssc.201901404](https://doi.org/10.1002/cssc.201901404).
- 50 D. Bogdanov, M. Ram, A. Aghahosseini, A. Gulagi, A. S. Oyewo, M. Child, U. Caldera, K. Sadovskaia, J. Farfan, L. De Souza Noel Simas Barbosa, M. Fasihi, S. Khalili, T. Traber and C. Breyer, *Energy*, 2021, **227**, 120467, DOI: [10.1016/j.energy.2021.120467](https://doi.org/10.1016/j.energy.2021.120467).
- 51 C. Breyer, G. Lopez, D. Bogdanov and P. Laaksonen, *Int. J. Hydrogen Energy*, 2024, **49**, 351–359, DOI: [10.1016/j.ijhydene.2023.08.170](https://doi.org/10.1016/j.ijhydene.2023.08.170).
- 52 L. Vielstädte, P. Linke, M. Schmidt, S. Sommer, M. Haeckel, M. Braack and K. Wallmann, *Int. J. Greenhouse Gas Control*, 2019, **84**, 190–203, DOI: [10.1016/j.ijggc.2019.03.012](https://doi.org/10.1016/j.ijggc.2019.03.012).
- 53 K. S. Lackner, C. H. Wendt, D. P. Butt, E. L. Joyce and D. H. Sharp, *Energy*, 1995, **20**, 1153–1170, DOI: [10.1016/0360-5442\(95\)00071-N](https://doi.org/10.1016/0360-5442(95)00071-N).
- 54 D. Kremer, C. Dertmann, S. Etzold, R. Telle, B. Friedrich and H. Wotruba, *J. CO<sub>2</sub> Util.*, 2022, **58**, 101928, DOI: [10.1016/j.jcou.2022.101928](https://doi.org/10.1016/j.jcou.2022.101928).
- 55 T. Strunge, P. Renforth and M. Van der Spek, *Commun. Earth Environ.*, 2022, **3**, 59, DOI: [10.1038/s43247-022-00390-0](https://doi.org/10.1038/s43247-022-00390-0).
- 56 S. R. Gislason, D. Wolff-Boenisch, A. Stefansson, E. H. Oelkers, E. Gunnlaugsson, H. Sigurdardottir, B. Sigfusson, W. S. Broecker, J. M. Matter and M. Stute, *Int. J. Greenhouse Gas Control*, 2010, **4**, 537–545, DOI: [10.1016/j.ijggc.2009.11.013](https://doi.org/10.1016/j.ijggc.2009.11.013).
- 57 E. H. Oelkers, S. R. Gislason and P. B. Kelemen, *Carbon Capture Sci. Technol.*, 2023, **6**, 100098, DOI: [10.1016/j.ccst.2023.100098](https://doi.org/10.1016/j.ccst.2023.100098).
- 58 A. Lyngfelt, D. J. A. Johansson and E. Lindeberg, *Int. J. Greenhouse Gas Control*, 2019, **87**, 27–33, DOI: [10.1016/j.ijggc.2019.04.022](https://doi.org/10.1016/j.ijggc.2019.04.022).
- 59 J. Duer, SPE Annual Technical Conference and Exhibition, San Antonio, Texas, USA, 2017, DOI: [10.2118/187100-MS](https://doi.org/10.2118/187100-MS).
- 60 M. D. Aminu, S. A. Nabavi, C. A. Rochelle and V. Manovic, *Appl. Energy*, 2017, **208**, 1389–1419, DOI: [10.1016/j.apenergy.2017.09.015](https://doi.org/10.1016/j.apenergy.2017.09.015).



- 61 S.-Y. Pan, Y.-H. Chen, L.-S. Fan, H. Kim, X. Gao, T.-C. Ling, P.-C. Chiang, S.-L. Pei and G. Gu, *Nat. Sustainability*, 2020, **3**, 399–405, DOI: [10.1038/s41893-020-0486-9](https://doi.org/10.1038/s41893-020-0486-9).
- 62 R. Yoshioka, K. Nakamura, R. Sekiai, J. Wang and N. Watanabe, *Front. Environ. Sci.*, 2022, **10**, 1068656, DOI: [10.3389/fenvs.2022.1068656](https://doi.org/10.3389/fenvs.2022.1068656).
- 63 P. B. Kelemen, N. McQueen, J. Wilcox, P. Renforth, G. Dipple and A. P. Vankeuren, *Chem. Geol.*, 2020, **550**, 119628, DOI: [10.1016/j.chemgeo.2020.119628](https://doi.org/10.1016/j.chemgeo.2020.119628).
- 64 P. Kelemen, S. M. Benson, H. Pilorgé, P. Psarras and J. Wilcox, *Front. Clim.*, 2019, **1**, 9, DOI: [10.3389/fclim.2019.00009](https://doi.org/10.3389/fclim.2019.00009).
- 65 J. S. Campbell, S. Foteinis, V. Furey, O. Hawrot, D. Pike, S. Aeschlimann, C. N. Maesano, P. L. Reginato, D. R. Goodwin, L. L. Looger, E. S. Boyden and P. Renforth, *Front. Clim.*, 2022, **4**, 879133, DOI: [10.3389/fclim.2022.879133](https://doi.org/10.3389/fclim.2022.879133).
- 66 C. N. Maesano, J. S. Campbell, S. Foteinis, V. Furey, O. Hawrot, D. Pike, S. Aeschlimann, P. L. Reginato, D. R. Goodwin, L. L. Looger, E. S. Boyden and P. Renforth, *Front. Clim.*, 2022, **4**, 945332, DOI: [10.3389/fclim.2022.945332](https://doi.org/10.3389/fclim.2022.945332).
- 67 C. D. Hills, N. Tripathi and P. J. Carey, *Front. Energy Res.*, 2020, **8**, 142, DOI: [10.3389/fenrg.2020.00142](https://doi.org/10.3389/fenrg.2020.00142).
- 68 L. A. Bullock, J. Alcalde, F. Tornos and J.-L. Fernandez-Turiel, *Sci. Total Environ.*, 2023, **867**, 161287, DOI: [10.1016/j.scitotenv.2022.161287](https://doi.org/10.1016/j.scitotenv.2022.161287).
- 69 L. A. Bullock, Z. Nkosi, M. Vele and M. Amponsah-Dacosta, *Int. J. Greenhouse Gas Control*, 2023, **124**, 103844, DOI: [10.1016/j.ijggc.2023.103844](https://doi.org/10.1016/j.ijggc.2023.103844).
- 70 F. L. Buckingham, G. M. Henderson, P. Holdship and P. Renforth, *Appl. Geochem.*, 2022, **147**, 105482, DOI: [10.1016/j.apgeochem.2022.105482](https://doi.org/10.1016/j.apgeochem.2022.105482).
- 71 L. J. West, S. A. Banwart, M. V. Martin, E. Kantzas and D. J. Beerling, *Appl. Geochem.*, 2023, **151**, 105591, DOI: [10.1016/j.apgeochem.2023.105591](https://doi.org/10.1016/j.apgeochem.2023.105591).
- 72 E. P. Kantzas, M. Val Martin, M. R. Lomas, R. M. Eufrazio, P. Renforth, A. L. Lewis, L. L. Taylor, J.-F. Mercure, H. Pollitt, P. V. Vercoulen, N. Vakiliifard, P. B. Holden, N. R. Edwards, L. Koh, N. F. Pidgeon, S. A. Banwart and D. J. Beerling, *Nat. Geosci.*, 2022, **15**, 382–389, DOI: [10.1038/s41561-022-00925-2](https://doi.org/10.1038/s41561-022-00925-2).
- 73 T. Rinder and C. von Hagke, *J. Cleaner Prod.*, 2021, **315**, 128178, DOI: [10.1016/j.jclepro.2021.128178](https://doi.org/10.1016/j.jclepro.2021.128178).
- 74 C. Myers and T. Nakagaki, *Environ. Res. Lett.*, 2020, **15**, 124018, DOI: [10.1088/1748-9326/abc217](https://doi.org/10.1088/1748-9326/abc217).
- 75 A. R. Stubbs, C. Paulo, I. M. Power, B. Wang, N. Zeyen and S. A. Wilson, *Int. J. Greenhouse Gas Control*, 2022, **113**, 103554, DOI: [10.1016/j.ijggc.2021.103554](https://doi.org/10.1016/j.ijggc.2021.103554).
- 76 C. S. Larkin, M. G. Andrews, C. R. Pearce, K. L. Yeong, D. J. Beerling, J. Bellamy, S. Benedick, R. P. Freckleton, H. Goring-Harford, S. Sadekar and R. H. James, *Front. Clim.*, 2022, **4**, 959229, DOI: [10.3389/fclim.2022.959229](https://doi.org/10.3389/fclim.2022.959229).
- 77 Neeraj and S. Yadav, *Mater. Sci. Energy Technol.*, 2020, **3**, 494–500, DOI: [10.1016/j.mset.2020.03.005](https://doi.org/10.1016/j.mset.2020.03.005).
- 78 M. E. Raymo and W. F. Ruddiman, *Nature*, 1992, **359**, 117–122, DOI: [10.1038/359117a0](https://doi.org/10.1038/359117a0).
- 79 E. Beaulieu, Y. Goddérís, Y. Donnadiéu, D. Labat and C. Roelandt, *Nat. Clim. Change*, 2012, **2**, 346–349, DOI: [10.1038/nclimate1419](https://doi.org/10.1038/nclimate1419).
- 80 S.-Y. Pan, E. E. Chang and P.-C. Chiang, *Aerosol Air Qual. Res.*, 2012, **12**, 770–791, DOI: [10.4209/aaqr.2012.06.0149](https://doi.org/10.4209/aaqr.2012.06.0149).
- 81 M. Ibrahim, M. El-Naas, A. Benamor, S. Al-Sobhi and Z. Zhang, *Processes*, 2019, **7**, 115, DOI: [10.3390/pr7020115](https://doi.org/10.3390/pr7020115).
- 82 R. Baciocchi and G. Costa, *Front. Energy Res.*, 2021, **9**, 592600, DOI: [10.3389/fenrg.2021.592600](https://doi.org/10.3389/fenrg.2021.592600).
- 83 D. Kremer, T. Strunge, J. Skocek, S. Schabel, M. Kostka, C. Hopmann and H. Wotruba, *J. CO2 Util.*, 2022, **62**, 102067, DOI: [10.1016/j.jcou.2022.102067](https://doi.org/10.1016/j.jcou.2022.102067).
- 84 S. Teir, T. Auvinen, A. Said, T. Kotiranta and H. Peltola, *Front. Energy Res.*, 2016, **4**(6), DOI: [10.3389/fenrg.2016.00006](https://doi.org/10.3389/fenrg.2016.00006).
- 85 S.-Y. Pan, T.-C. Chung, C.-C. Ho, C.-J. Hou, Y.-H. Chen and P.-C. Chiang, *Sci. Rep.*, 2017, **7**, 17227, DOI: [10.1038/s41598-017-17648-9](https://doi.org/10.1038/s41598-017-17648-9).
- 86 V. Romanov, Y. Soong, C. Carney, G. E. Rush, B. Nielsen and W. O'Connor, *ChemBioEng Rev.*, 2015, **2**, 231–256, DOI: [10.1002/cben.201500002](https://doi.org/10.1002/cben.201500002).
- 87 R. F. Suleman Kali, D. Fan, N. Hazel and A. Striolo, *Environ. Sci. Adv.*, 2022, **1**, 138–155, DOI: [10.1039/D1VA00036E](https://doi.org/10.1039/D1VA00036E).
- 88 R. Zevenhoven, J. Fagerlund and J. K. Songok, *Greenhouse Gases Sci. Technol.*, 2011, **1**, 48–57, DOI: [10.1002/ghg3.7](https://doi.org/10.1002/ghg3.7).
- 89 H. Ostovari, A. Sternberg and A. Bardow, *Sustain. Energy Fuels*, 2020, **4**, 4482–4496, DOI: [10.1039/D0SE00190B](https://doi.org/10.1039/D0SE00190B).
- 90 A. A. Olajire, *J. Pet. Sci. Eng.*, 2013, **109**, 364–392, DOI: [10.1016/j.petrol.2013.03.013](https://doi.org/10.1016/j.petrol.2013.03.013).
- 91 M. S. Ncongwane, J. L. Broadhurst and J. Petersen, *Int. J. Greenhouse Gas Control*, 2018, **77**, 70–81, DOI: [10.1016/j.ijggc.2018.07.019](https://doi.org/10.1016/j.ijggc.2018.07.019).
- 92 R. M. Santos, P. C. M. Knops, K. L. Rijnsburger and Y. W. Chiang, *Front. Energy Res.*, 2016, **4**, 5, DOI: [10.3389/fenrg.2016.00005](https://doi.org/10.3389/fenrg.2016.00005).
- 93 A. Sanna, M. Uibu, G. Caramanna, R. Kuusik and M. M. Maroto-Valer, *Chem. Soc. Rev.*, 2014, **43**, 8049–8080, DOI: [10.1039/C4CS00035H](https://doi.org/10.1039/C4CS00035H).
- 94 J. Fagerlund, E. Nduagu, I. Romao and R. Zevenhoven, *Energy*, 2012, **41**(1), 184–191, DOI: [10.1016/j.energy.2011.08.032](https://doi.org/10.1016/j.energy.2011.08.032).
- 95 A. Scott, C. Oze, V. Shah, N. Yang, B. Shanks, C. Cheeseman, A. Marshall and M. Watson, *Commun. Earth Environ.*, 2021, **2**, 25, DOI: [10.1038/s43247-021-00099-6](https://doi.org/10.1038/s43247-021-00099-6).
- 96 P. A. E. Pogge von Strandmann, C. Tooley, J. J. P. A. Mulders and P. Renforth, *Front. Clim.*, 2022, **4**, 827698, DOI: [10.3389/fclim.2022.827698](https://doi.org/10.3389/fclim.2022.827698).
- 97 G. Cipolla, S. Calabrese, A. Porporato and L. V. Noto, *Biogeosciences*, 2022, **19**, 3877–3896, DOI: [10.5194/bg-19-3877-2022](https://doi.org/10.5194/bg-19-3877-2022).
- 98 G. Cipolla, S. Calabrese, L. V. Noto and A. Porporato, *Adv. Water Resour.*, 2021, **154**, 103934, DOI: [10.1016/j.advwatres.2021.103934](https://doi.org/10.1016/j.advwatres.2021.103934).
- 99 G. Cipolla, S. Calabrese, L. V. Noto and A. Porporato, *Adv. Water Resour.*, 2021, **154**, 103949, DOI: [10.1016/j.advwatres.2021.103949](https://doi.org/10.1016/j.advwatres.2021.103949).
- 100 R. M. Eufrazio, E. P. Kantzas, N. R. Edwards, P. B. Holden, H. Pollitt, J.-F. Mercure, S. C. L. Koh and D. J. Beerling, *Commun. Earth Environ.*, 2022, **3**, 106, DOI: [10.1038/s43247-022-00436-3](https://doi.org/10.1038/s43247-022-00436-3).
- 101 N. Vakiliifard, E. P. Kantzas, N. R. Edwards, P. B. Holden and D. J. Beerling, *Environ. Res. Lett.*, 2021, **16**, 094005, DOI: [10.1088/1748-9326/ac1818](https://doi.org/10.1088/1748-9326/ac1818).



- 102 X. Jia, Z. Zhang, F. Wang, Z. Li, Y. Wang, K. B. Aviso, D. Y. C. Foo, P. N. S. B. Nair, R. R. Tan and F. Wang, *Resour., Conserv. Recycl.*, 2022, **176**, 105910, DOI: [10.1016/j.resconrec.2021.105910](https://doi.org/10.1016/j.resconrec.2021.105910).
- 103 K. B. Aviso, J.-Y. Lee, A. T. Ubando and R. R. Tan, *Clean Technol. Environ. Policy*, 2022, **24**, 21–37, DOI: [10.1007/s10098-021-02053-8](https://doi.org/10.1007/s10098-021-02053-8).
- 104 N. Wei, X. Li, Z. Jiao, P. H. Stauffer, S. Liu, K. Ellett and R. S. Middleton, *Front. Earth Sci.*, 2022, **9**, 777323, DOI: [10.3389/feart.2021.777323](https://doi.org/10.3389/feart.2021.777323).
- 105 L. A. Bullock, A. Yang and R. C. Darton, *Sci. Total Environ.*, 2022, **808**, 152111, DOI: [10.1016/j.scitotenv.2021.152111](https://doi.org/10.1016/j.scitotenv.2021.152111).
- 106 D. Kremer, S. Etzold, J. Boldt, P. Blaum, K. M. Hahn, H. Wotruba and R. Telle, *Minerals*, 2019, **9**, 485, DOI: [10.3390/min9080485](https://doi.org/10.3390/min9080485).
- 107 G. Faber, A. Ruttinger, T. Strunge, T. Langhorst, A. Zimmermann, M. van der Hulst, F. Bensebaa, S. Moni and L. Tao, *Front. Clim.*, 2022, **4**, 820261, DOI: [10.3389/fclim.2022.820261](https://doi.org/10.3389/fclim.2022.820261).
- 108 H. Ostovari, L. Müller, F. Mayer and A. Bardow, *J. Cleaner Prod.*, 2022, **360**, 131750, DOI: [10.1016/j.jclepro.2022.131750](https://doi.org/10.1016/j.jclepro.2022.131750).
- 109 [IEAGHG] - International Energy Agency Greenhouse Gas R&D Programme, The Costs of CO<sub>2</sub> storage, IEA GHG, 2013.
- 110 S. Teir, S. Eloneva, C.-J. Fogelholm and R. Zevenhoven, *Energy Convers. Manag.*, 2006, **47**, 3059–3068, DOI: [10.1016/j.enconman.2006.03.021](https://doi.org/10.1016/j.enconman.2006.03.021).
- 111 S. R. Gislason and E. H. Oelkers, *Science*, 2014, **344**, 373–374, DOI: [10.1126/science.1250828](https://doi.org/10.1126/science.1250828).
- 112 S. Ó. Snæbjörnsdóttir, C. Marieni, M. Voigt and B. Sigfússon, *Comprehensive Renewable Energy*, Elsevier, 2022, pp. 315–330, DOI: [10.1016/B978-0-12-819727-1.00108-4](https://doi.org/10.1016/B978-0-12-819727-1.00108-4).
- 113 D. S. Goldberg, T. Takahashi and A. L. Slagle, *Proc. Natl. Acad. Sci. U. S. A.*, 2008, **105**, 9920–9925, DOI: [10.1073/pnas.0804397105](https://doi.org/10.1073/pnas.0804397105).
- 114 H. Kristjánssdóttir and S. Kristjánssdóttir, *Balt. J. Econ. Stud.*, 2021, **7**, 1–9, DOI: [10.30525/2256-0742/2021-7-1-1-9](https://doi.org/10.30525/2256-0742/2021-7-1-1-9).
- 115 M. Voigt, C. Marieni, A. Baldermann, I. M. Galeczka, D. Wolff-Boenisch, E. H. Oelkers and S. R. Gislason, *Geochim. Cosmochim. Acta*, 2021, **308**, 21–41, DOI: [10.1016/j.gca.2021.05.056](https://doi.org/10.1016/j.gca.2021.05.056).
- 116 S. Self, M. F. Coffin, M. R. Rampino and J. A. Wolff, *The Encyclopedia of Volcanoes*, Elsevier, 2015, pp. 441–455, DOI: [10.1016/B978-0-12-385938-9.00024-9](https://doi.org/10.1016/B978-0-12-385938-9.00024-9).
- 117 L. Johansson, S. Zahirovic and R. D. Müller, *Geophys. Res. Lett.*, 2018, **45**, 5380–5389, DOI: [10.1029/2017GL076691](https://doi.org/10.1029/2017GL076691).
- 118 M. Dri, A. Sanna and M. M. Maroto-Valer, *Energy Procedia*, 2014, **63**, 6544–6547, DOI: [10.1016/j.egypro.2014.11.690](https://doi.org/10.1016/j.egypro.2014.11.690).
- 119 H. Geerlings and R. Zevenhoven, *Annu. Rev. Chem. Biomol. Eng.*, 2013, **4**, 103–117, DOI: [10.1146/annurev-chembioeng-062011-080951](https://doi.org/10.1146/annurev-chembioeng-062011-080951).
- 120 C. Arpagaus, F. Bless, M. Uhlmann, J. Schiffmann and S. S. Bertsch, *Energy*, 2018, **152**, 985–1010, DOI: [10.1016/j.energy.2018.03.166](https://doi.org/10.1016/j.energy.2018.03.166).
- 121 S. J. Gerdemann, W. K. O'Connor, D. C. Dahlin, L. R. Penner and H. Rush, *Environ. Sci. Technol.*, 2007, **41**, 2587–2593, DOI: [10.1021/es0619253](https://doi.org/10.1021/es0619253).
- 122 P. Renforth, *Nat. Commun.*, 2019, **10**, 1401, DOI: [10.1038/s41467-019-09475-5](https://doi.org/10.1038/s41467-019-09475-5).
- 123 E. E. E. M. te Pas, M. Hagens and R. N. J. Comans, *Front. Clim.*, 2023, **4**, 954064, DOI: [10.3389/fclim.2022.954064](https://doi.org/10.3389/fclim.2022.954064).
- 124 M. Heřmanská, M. J. Voigt, C. Marieni, J. Declercq and E. H. Oelkers, *Chem. Geol.*, 2022, **597**, 120807, DOI: [10.1016/j.chemgeo.2022.120807](https://doi.org/10.1016/j.chemgeo.2022.120807).
- 125 Thunder Said Energy, Mining: crushing, grinding and comminution costs?, <https://thundersaidenergy.com/downloads/mining-crushing-grinding-and-communitation-costs/>, (accessed 14 July 2024).
- 126 G. Thomassen, S. V. Passel and J. Dewulf, *Renew. Sustain. Energy Rev.*, 2020, **130**, 109937, DOI: [10.1016/j.rser.2020.109937](https://doi.org/10.1016/j.rser.2020.109937).
- 127 J. I. Lewis and G. F. Nemet, *WIREs Clim. Change*, 2021, **12**(5), e730, DOI: [10.1002/wcc.730](https://doi.org/10.1002/wcc.730).
- 128 E. Benhelal, M. I. Rashid, C. Holt, M. S. Rayson, G. Brent, J. M. Hook, M. Stockenhuber and E. M. Kennedy, *J. Cleaner Prod.*, 2018, **186**, 499–513, DOI: [10.1016/j.jclepro.2018.03.076](https://doi.org/10.1016/j.jclepro.2018.03.076).
- 129 H. Ostovari, L. Muller, J. Skocek and A. Bardow, *Environ. Sci. Technol.*, 2021, **55**, 5212–5223, DOI: [10.1021/acs.est.0c07599](https://doi.org/10.1021/acs.est.0c07599).
- 130 A. M. Bremen, T. Strunge, H. Ostovari, H. Spütz, A. Mhamdi, P. Renforth, M. van der Spek, A. Bardow and A. Mitsos, *Ind. Eng. Chem. Res.*, 2022, **61**, 13177–13190, DOI: [10.1021/acs.iecr.2c00984](https://doi.org/10.1021/acs.iecr.2c00984).
- 131 P. Fennell, J. Driver, C. Bataille and S. J. Davis, *Nature*, 2022, **603**, 574–577, DOI: [10.1038/d41586-022-00758-4](https://doi.org/10.1038/d41586-022-00758-4).
- 132 D. Keiner, A. Gulagi and C. Breyer, LUT-DEMAND (version 1.1), *Zenodo*, 2023, DOI: [10.5281/zenodo.7189337](https://doi.org/10.5281/zenodo.7189337).
- 133 N. Wijaya, D. Vikara, D. Morgan, T. Grant and D. Remson, in Day 1 Tue, April 26, 2022, SPE, Bakersfield, California, USA, 2022, D011S005R004.
- 134 V. Vishal, Y. Verma, D. Chandra and D. Ashok, *Int. J. Greenhouse Gas Control*, 2021, **111**, 103458, DOI: [10.1016/j.ijggc.2021.103458](https://doi.org/10.1016/j.ijggc.2021.103458).
- 135 B. P. McGrail, H. T. Schaefer, A. M. Ho, Y.-J. Chien, J. J. Dooley and C. L. Davidson, *J. Geophys. Res. Solid Earth*, 2006, **111**, B12201, DOI: [10.1029/2005JB004169](https://doi.org/10.1029/2005JB004169).
- 136 S. Ó. Snæbjörnsdóttir, F. Wiese, T. Fridriksson, H. Ármannsson, G. M. Einarsson and S. R. Gislason, *Energy Procedia*, 2014, **63**, 4585–4600, DOI: [10.1016/j.egypro.2014.11.491](https://doi.org/10.1016/j.egypro.2014.11.491).
- 137 C. A. Myers, T. Nakagaki and K. Akutsu, *Int. J. Greenhouse Gas Control*, 2019, **87**, 100–111, DOI: [10.1016/j.ijggc.2019.05.021](https://doi.org/10.1016/j.ijggc.2019.05.021).
- 138 Worldometer, Cropland Area by Country, <https://www.worldometers.info/food-agriculture/cropland-by-country/>, (accessed 1 July 2024).
- 139 V. Vogl, M. Åhman and L. J. Nilsson, *J. Cleaner Prod.*, 2018, **203**, 736–745, DOI: [10.1016/j.jclepro.2018.08.279](https://doi.org/10.1016/j.jclepro.2018.08.279).
- 140 W. Wieder, *Regridded Harmonized World Soil Database v1.2*, 2014, DOI: [10.3334/ORNLDAAC/1247](https://doi.org/10.3334/ORNLDAAC/1247).
- 141 J. Young, N. McQueen, C. Charalambous, S. Foteinis, O. Hawrot, M. Ojeda, H. Pilorgé, J. Andresen, P. Psarras, P. Renforth, S. Garcia and M. Van Der Spek, *One Earth*, 2023, **6**, 899–917, DOI: [10.1016/j.oneear.2023.06.004](https://doi.org/10.1016/j.oneear.2023.06.004).
- 142 Global CCS Institute, GLOBAL STATUS OF CCS 2022, Global CCS Institute, 2022.



- 143 D. M. Franks, J. Keenan and D. Hailu, *Nat. Sustainability*, 2022, **6**, 21–27, DOI: [10.1038/s41893-022-00967-9](https://doi.org/10.1038/s41893-022-00967-9).
- 144 O. Edenhofer, M. Franks, M. Kalkuhl and A. Runge-Metzger, On the Governance of Carbon Dioxide Removal - A Economics Perspective, Munich, 2023.
- 145 N. McQueen, P. Kelemen, G. Dipple, P. Renforth and J. Wilcox, *Nat. Commun.*, 2020, **11**, 3299, DOI: [10.1038/s41467-020-16510-3](https://doi.org/10.1038/s41467-020-16510-3).
- 146 N. M. Haegel, P. Verlinden, M. Victoria, P. Altermatt, H. Atwater, T. Barnes, C. Breyer, C. Case, S. De Wolf, C. Deline, M. Dharmrin, B. Dimmler, M. Gloeckler, J. C. Goldschmidt, B. Hallam, S. Haussener, B. Holder, U. Jaeger, A. Jaeger-Waldau, I. Kaizuka, H. Kikusato, B. Kroposki, S. Kurtz, K. Matsubara, S. Nowak, K. Ogimoto, C. Peter, I. M. Peters, S. Philipps, M. Powalla, U. Rau, T. Reindl, M. Roumpani, K. Sakurai, C. Schorn, P. Schossig, R. Schlatmann, R. Sinton, A. Slaoui, B. L. Smith, P. Schneidewind, B. Stanbery, M. Topic, W. Tumas, J. Vasi, M. Vetter, E. Weber, A. W. Weeber, A. Weidlich, D. Weiss and A. W. Bett, *Science*, 2023, **380**, 39–42, DOI: [10.1126/science.adf6957](https://doi.org/10.1126/science.adf6957).
- 147 L. Warszawski, E. Kriegler, T. M. Lenton, O. Gaffney, D. Jacob, D. Klungenfeld, R. Koide, M. M. Costa, D. Messner, N. Nakicenovic, H. J. Schellnhuber, P. Schlosser, K. Takeuchi, S. Van Der Leeuw, G. Whiteman and J. Rockström, *Environ. Res. Lett.*, 2021, **16**, 064037, DOI: [10.1088/1748-9326/abfcec](https://doi.org/10.1088/1748-9326/abfcec).
- 148 M. Honegger, *Nat. Commun.*, 2023, **14**, 534, DOI: [10.1038/s41467-023-36199-4](https://doi.org/10.1038/s41467-023-36199-4).
- 149 R. Gholami, A. Raza and S. Iglauer, *Earth Sci. Rev.*, 2021, **223**, 103849, DOI: [10.1016/j.earscirev.2021.103849](https://doi.org/10.1016/j.earscirev.2021.103849).
- 150 M. Molari, K. Guilini, C. Lott, M. Weber, D. De Beer, S. Meyer, A. Ramette, G. Wegener, F. Wenzhöfer, D. Martin, T. Cibic, C. De Vittor, A. Vanreusel and A. Boetius, *Sci. Adv.*, 2018, **4**, eaao2040, DOI: [10.1126/sciadv.aao2040](https://doi.org/10.1126/sciadv.aao2040).
- 151 A. Vinca, J. Emmerling and M. Tavoni, *Front. Energy Res.*, 2018, **6**, 40, DOI: [10.3389/fenrg.2018.00040](https://doi.org/10.3389/fenrg.2018.00040).
- 152 T. Ajayi, J. S. Gomes and A. Bera, *Pet. Sci.*, 2019, **16**, 1028–1063, DOI: [10.1007/s12182-019-0340-8](https://doi.org/10.1007/s12182-019-0340-8).
- 153 T. Dixon and K. D. Romanak, *Int. J. Greenhouse Gas Control*, 2015, **41**, 29–40, DOI: [10.1016/j.ijggc.2015.05.029](https://doi.org/10.1016/j.ijggc.2015.05.029).
- 154 [BMWi] - Bundesministerium für Wirtschaft und Energie, 2020.
- 155 P. S. Ringrose, A. S. Mathieson, I. W. Wright, F. Selama, O. Hansen, R. Bissell, N. Saoula and J. Midgley, *Energy Procedia*, 2013, **37**, 6226–6236, DOI: [10.1016/j.egypro.2013.06.551](https://doi.org/10.1016/j.egypro.2013.06.551).

