
Energy & Environmental Science





Cite this: Energy Environ. Sci., 2018, 11, 3408

Received 11th June 2018, Accepted 20th August 2018

DOI: 10.1039/c8ee01676c

rsc.li/ees

Broader context

While the European Academies Science Advisory Council (EASAC) reaffirmed the importance of NETs for climate mitigation in their latest report, none of the six technologies investigated, from biological methods such as afforestation and ocean fertilisation, to technical methods such as BECCS and Direct Air Capture, emerge as a panacea for achieving carbon dioxide removal at the gigatone scale. With a potentially positive CO_2 balance, and negative impacts on ecosystems and biodiversity, BECCS performance, in particular, remains a controversial topic. However, with CCS demonstration projects under way, and existing biomass supply chains and facilities, BECCS presents two key advantages. Firstly, from a technology stand point, BECCS is relatively easily deployable and scalable. Secondly, BECCS uniquely provides two services to society: carbon dioxide removal and energy production. Therefore, understanding (a) how to deploy BECCS in a truly sustainable way, and (b) the trade-offs between BECCS key performance indicators (KPIs) in the context of BECCS optimal value chains, is therefore vital to unlocking BECCS deployment at the gigatone scale.

satisfies its resource efficiency and technical performance objectives.

Investigating the BECCS resource nexus:

delivering sustainable negative emissions

Bioenergy with carbon capture and storage (BECCS), and other negative emissions technologies (NETs), are integral to all scenarios consistent with meeting global climate ambitions. BECCS's ability to promptly remove CO₂ from the atmosphere in a resource efficient manner, whilst being a net energy generator to the global economy, remains controversial. Given the large range of potential outcomes, it is crucial to understand how, if at all, this technology can be deployed in a way which minimises its impact on natural resources and ecosystems, while maximising both carbon removal and power generation. In this study, we present a series of thought experiments, using the Modelling and Optimisation of Negative Emissions Technologies (MONET) framework, to provide insight into the combinations of biomass feedstock, origin, land type, and transport route, to meet a given CO₂ removal target. The optimal structure of an international BECCS supply chain was found to vary both quantitatively and qualitatively as the focus shifted from conserving water, land or biomass, to maximising energy generated, with the water use in particular increasing threefold in the land and biomass use minimisation scenario, as compared to the water minimisation scenario. In meeting regional targets, imported biomass was consistently chosen over indigenous biomass in the land and water minimisation scenarios, confirming the dominance of factors such as yield, electricity grid carbon intensity, and precipitation, over transport distance. A pareto-front analysis was performed and, in addition to highlighting the strong trade-offs between BECCS resource efficiency objectives, indicated the potential for tipping points. An analysis of the sensitivity to the availability of marginal land and agricultural residues showed that (1) the availability of agricultural residues had a great impact on BECCS land, and that (2) water use and land use change, two critical sustainability indicators for BECCS, were negatively correlated. Finally, we showed that maximising energy production increased water use and land use fivefold, and land use change by two orders of magnitude. It is therefore likely that an exclusive focus on energy generation and CO₂ removal can result in negative consequences for the broader

environment. In spite of these strong trade-offs however, it was found that BECCS could meet its electricity production objective without compromising estimated safe land use boundaries. Provided that

the right choices are made along BECCS value chain, BECCS can be deployed in a way that both

Mathilde Faiardy,^{ab} Solene Chiquier^{ab} and Niall Mac Dowell 10 *^{ab}

^a Centre for Environmental Policy, Imperial College London, Exhibition Road, London, SW7 1NA, UK

^b Centre for Process Systems Engineering, Imperial College London, Exhibition Road, London, SW7 2AZ, UK. E-mail: niall@imperial.ac.uk; Tel: +44 (0)20 7594 9298



1 Introduction

1.1 BECCS potential for climate mitigation is uncertain

With a remaining carbon budget of 800 Gt_{CO_2} , and total global emissions approaching 40 Gt_{CO2} per year, the need for net CO2 removal from the atmosphere in order to maintain a 2 to 1.5 C trajectory for 2100 is unequivocal. As no negative emissions technology (NETs) has been found to be an obvious and unique winner, which, how, and how much of these technologies should be deployed to guarantee efficient, sustainable and permanent CO2 removal remains a fundamental research challenge.^{1,2} Combining two existing technologies - bioenergy and carbon capture and storage (CCS), and presenting the co-benefit of producing energy whilst removing CO₂ from the atmosphere, BECCS has received particular focus. In particular, the veracity of claims that BECCS has the potential to simultaneously produce power, and remove CO₂ from the atmosphere in material quantities and in a relevant time frame, whilst having limited effects on ecosystems and biodiversity, is the subject of current study.³⁻⁸ Concerns surrounding excessive freshwater use, land use, biochemical flows, land use change, and impact on biodiversity have been raised. In Smith et al.,8 additional water volumes as high as 720 km³ as compared to a business as usual scenario, and land area between 380 and 700 Mha were required to remove 12 Gt_{CO2} per year, highlighting BECCS as one of the most resource intensive NETs. In Boysen et al.,⁶ it is argued that even assuming substantial emissions reduction, BECCS scale of deployment would have considerable economic and environmental impacts, using over 1.1 Gha of the most productive land, or eliminating over 50% of natural forests, in addition to using over 100 Mt per year of nitrogen fertiliser. In a recent study by Heck et al.,⁵ the authors studied different BECCS pathways including biomass to hydrogen (B2H2) and biomass to liquid fuels (B2L), with different feedstocks, and argued that, were BECCS to be deployed in strict respect of the planetary boundaries (PBs) as defined in Steffen et al.,9 actual CO₂ removal would be of the order of 0.2 Gt_{CO_2} per year, hence two orders of magnitude below what would theoretically be required by 2100.^{10,11} Allowing BECCS to trespass in the PBs uncertainty zone however, could enable the removal of up to 22 Gt_{CO2} per year. In previous contributions,^{3,4} using the Modelling and Optimisation of Negative Emissions Technologies (MONET) framework, we quantified the extent to which BECCS resource mobilisation may be region and biomass specific, putting forth the need for case specific BECCS value chain design. Careful design and optimisation of BECCS value chains therefore appears vital to unlock the potential large-scale deployment of this technology.

1.2 BECCS value chain design is a multi-criteria optimisation problem

Cost-based optimisation is a common approach in the field of supply chain design. In a study by Tagomori *et al.*,¹² the authors investigated BECCS potential in Brazil by determining the cost-optimal CO₂ transport network, with CO₂ captured from biogenic sources. Akgul *et al.*¹³ studied the optimisation of

BECCS at the process scale, by determining the BECCS optimal technological pathway for power generation. Through a paretofront analysis, trade-offs between the cost and carbon intensity of the system were examined. Other studies have looked at spatially-explicit cost-optimal BECCS deployment pathways in South Korea,¹⁴ France¹⁵ and the US.^{16,17} However, owing to the range of potential environmental impacts associated with BECCS, as well as services provided - power generation and carbon dioxide removal, BECCS key performance indicators (KPIs) are necessarily highly diverse. BECCS value chain optimisation is therefore inherently multi-objective, and by focusing either on cost, or on the trade-offs between economic and environmental performance, one could easily cloud the complex interactions existing between BECCS environmental impacts. In their work, Heck et al.⁵ presented a global land and biomass optimal allocation model for BECCS via B2H2 and B2L, in which the weighted sum of BECCS environmental impacts - freshwater use, forest loss, biosphere integrity and biochemical flows - resulting from achieving a fixed biomass harvest objective, was minimised. The results highlighted trade-offs between bioenergy production and negative emissions potential, as well as freshwater use and forest loss. However, the difficulty with preference-based optimisation is that the optimisation results obtained are highly dependent on the values attributed to the weights, thus on the relative importance of each objective, which can be highly region specific. Furthermore, whilst the model carefully considered planetary boundaries and regional biomass production potential, BECCS downstream logistics, such as biomass processing and transport to potential CO₂ storage, were not included. This contribution thus addresses this gap via the development of a BECCS value chain optimisation model which explicitly accounts for biomass processing, transport and use in the vicinity of CO₂ sinks, and investigates the trade-offs between BECCS KPIs through pareto-analysis.

1.3 Deploying BECCS within planetary boundaries: the case of marginal lands and agricultural residues

In order to be sustainable, BECCS needs to be deployed within all planetary boundaries. To avoid potential land use change^{18,19} and competition with other land uses, there have been many attempts to evaluate the amount of marginal, yet suitable, land for bioenergy production. The main caveat comes from the difficulty in defining the nature of marginal land (MAL). Edrisi *et al.*²⁰ differentiates wastelands for biomass cultivation by two views: the suitability/quality of the land, and the socio-economic value of the land. In this context, marginal land is considered to be at the intersection of under-utilised lands and neglected unused land. The definition of marginal land can also vary in time. A farmer might choose to use a parcel of marginal land one year, and leave it unused the next, depending on the profitability of this land in this specific year.

This diversity in definition results in a variety of marginal land evaluation. In 2011, Cai *et al.*²¹ provided an extensive mapping of marginal land, by quantifying the mixed crops, natural vegetation land, cropland, schrubland, savanna and

grassland with marginal productivity. This work resulted in the spatial determination of marginal land availability with a spatial resolution of 30 arc second geographic. Total world marginal land availability was quantified between 320 and 1107 Mha, with between 108 and 256 Mha in South America, 18 and 151 Mha in India, 33 and 111 Mha in Europe, 52-152 Mha in China, and 66-314 Mha in Africa. This evaluation was later on downscaled by Fritz et al.²² to 56 to 1035 Mha, with adjustments made to land cover and human impact assumptions. Several studies were also performed at the regional level. In Brazil, Lossau et al.²³ evaluated the spatial distribution of marginal land in Brazil by calculating the residual land from cropland, pastures, forest, build up, barren, water bodies, and the protected Amazon biome area. The residual area was then overlayed with the FAO/IIASA land suitability modelling framework²⁴ to assess its suitability. A total of 37.8 Mha was found to be available and unprotected, with approximately 20% of this land was considered very suitable for biofuel production. It is worth noting however that the suitability modelling framework was used for conventional oil and grain crops production, and perennial grasses such as Miscanthus and Switchgrass could potentially be more resilient. In China, marginal land including saline land, steep hillside and idle land was evaluated at 35-75 Mha,25 while another study pointed to 44 Mha exploitable for energy plants.²⁶ A more detailed study on miscanthus production in China evaluated at only 17 Mha the potential Miscanthus production area in China, with yields as low as 2 t per ha in bare areas.²⁷ In Europe, a study by Strapasson et al.28 based on FAO land cover and land use data quantified the land available in the EU for bioenergy production to 20 Mha. In India, a study by Edrisi et al.²⁰ evaluated the potential of MAL for bioenergy production to 39 Mha, providing suitable soil amendments and agro-technologies are used to improve the fertility/productivity of the various wasteland considered. Table 1 summarises these findings, highlighting the great range in marginal land availability assessments in the literature. Using agricultural residues could represent an alternative to using marginal land, while still avoiding land use change. However, mismanagement or over-utilisation of agricultural residues could led to various negative impacts among increased water evapotranspiration, soil depletion, productivity loss, erosion.^{29,30} The use of agricultural residues in an attempt to reduce BECCS's impact on land use, water use and land use change, therefore needs to be carefully monitored.

1.4 Achieving negative emissions *via* BECCS: the example of the UK

As part of its transition to a low-carbon economy, the UK has committed to be carbon neutral by 2050. Forecasts anticipate that in achieving this target, 50 Mt per year of carbon dioxide could be sustainably removed from the atmosphere, in order to offset remaining emissions from various sectors of the industry.³⁴ Furthermore, at the time of writing, the Committee for Climate Change (CCC) has been instructed to investigate the implications of meeting the Paris targets on UK carbon budgets, signalling a potential increase in ambition.³⁵ Were NETs to be delivered *via* BECCS, building sustainable biomass

View Article Online

Paper

Table 1 Literature review on marginal land availability

Region	Year	MAL (Mha)	Sources
South America	2011	$108^{a} - 256^{b}$	21
Brazil	2015	$10^{c} - 38^{d}$	23
China	2009	35-75 ^e	25
China	2011	44^f	26
China	2011	$52^{a}-152^{b}$	21
China	2016	$8^{g}-21^{h}$	27
UK	2009	1.4^j	31
England and Wales	2010	0.6^k	32
UK	2015	3.4^l	33
Europe	2011	33^{a} -111 ^b	21
EU28	2016	20^i	28
India	2011	$18^{a} - 151^{b}$	21
India	2016	$39^{g} - 47^{e}$	20
USA	2011	43^{a} -123 ^b	21
World	2011	320^{a} -1107 ^b	21
World	2013	$56^{m} - 1035^{m}$	22

^{*a*} Mixed crop and natural vegetation land with marginal productivity. ^{*b*} Mixed crops and natural vegetation land, cropland, scrubland, savanna and grassland with marginal productivity, discounting the total pasture land. ^{*c*} Total protected MAL suitable or very suitable for conventional oil and grain crops. ^{*d*} Total unprotected MAL. ^{*e*} Total MAL including saline, steep and idle land. ^{*f*} Total MAL. ^{*s*} Faction of the MAL which is suitable. ^{*h*} Total MAL for Miscanthus. ^{*i*} Total MAL for bioenergy based on FAO land use/land cover data. ^{*j*} Relatively high quality land for perennial crops. ^{*k*} 0.2 for miscanthus, 0.4 for SRC willow from agricultural land quality and yield map. ^{*l*} Total available arable and grassland for bioenergy in 2030. ^{*m*} Cai *et al.* MAL values downscaled after land cover and human impacts corrections.

supply chains, as well as deploying an efficient CCS network, will be crucial in reaching this target. In 2015, the total EU pellet consumption reached 20 Mt of biomass pellets, with 6.2 Mt of imports, coming at 90% through the North America-EU trading route. In the UK, Drax power plant alone used 6.5 Mt_{CO}, of pellets in 2016 for its three biomass-dedicated 660 MW units. Though the majority of Drax feedstock originates from sawmill and forestry residues,³⁶ an increasing biomass demand in the UK, for both bioenergy and negative emissions purposes, will inevitably result in the diversification of the biomass feedstock, likely combining both domestic and imported agricultural residues and dedicated energy crops. On the CCS front, sizable volumes of CO2 storage have been identified in both offshore and onshore aquifers.³⁷ Given the UK's 2050 carbon removal target and identified available CO₂ storage in the North Sea, the design of optimal BECCS value chains for UK-based CO2 removal from the atmosphere is the central case study investigated in this contribution. However, the framework is applicable to any region with identified CO₂ storage and CO₂ removal targets, and we further extend this work to present a series of thought experiments describing optimal supply chains to meet US and China-specific carbon removal targets, in southern US and eastern China, respectively.

1.5 Contribution of this study

This study presents a region-specific optimal allocation of resources – biomass feedstock, land, water, energy – to meet region specific carbon dioxide removal target *via* BECCS. The MONET framework was used to determine the optimal

Paper

combination of feedstock type, region, land type, and transport route to a given region to remove CO₂ with a fleet of 500 MW UK, US and China-based pulverised combustion power plants, in conjunction with CO₂ capture and storage. Section 2 presents the model and assumptions used for this analysis, detailing the amendments and additions made to the MONET framework since its first implementation.⁴ Section 3 presents the different optimal BECCS value chains to minimise either the total water use, land use and biomass use. Section 3.2 investigates the trade-offs between these different environmental indicators, while Section 4 investigates the sensitivity of these indicators to the availabilities of marginal land and crop residues. Finally Section 5 further investigates the relationship between the two services provided by BECCS - carbon dioxide removal and energy production - by highlighting the trade-offs between BECCS environmental performance indicators and energy production service.

2 Methodology

In order to sustainably contribute to climate change mitigation, negative emissions technologies must (1) deliver the service(s) for which they were deployed, *i.e.*, CO₂ removal and, in the case of BECCS, energy production, (2) at a low resource cost, and (3) with limited indirect impact on the markets and ecosystems. We summarise these three criteria by the NETs trilemma, illustrated in Fig. 1. The NETs key performance indicators (KPIs) include net CO₂ removal, tN_{CO2}, and net electricity production, tNE, to evaluate technical performance, water use, tWU, land use, tLU, and biomass use, tBU, to evaluate resource efficiency, and agricultural residue use, tRU, and land use change, tLUC, to evaluate BECCS economic-environmental impacts. To clarify, no cost analysis was included in the MONET framework, which means that the total system cost is not one of the objective functions explored in this study. This is left for future work.




Fig. 1 Schematic of the NETs trilemma. NETs key performance indicators are reassembled in three categories: technical performance – net CO_2 removal and electricity production, resource efficiency – water, land and biomass use (equivalent to CO_2 efficiency), and economic-environmental impacts – land use change and agricultural residues use (with potential impact on soil productivity and erosion).

In order to position BECCS within this performance trilemma, we designed the MONET framework which comprises (1) a BECCS value chain model which calculates the water use, land use, net CO_2 removed, CO_2 breakeven time, net electricity produced and net CO_2 efficiency of different BECCS value chains, and (2) a BECCS value chain optimisation model which determines the optimal combination of BECCS value chain configurations to meet a given CO_2 removal target.

2.1 MONET value chain modelling framework

The value chain model specifically accounts for biomass cultivating, harvesting, pelleting, transport to a given region and conversion in a pulverised combustion plant combined with post-combustion CO_2 capture and subsequent storage in the vicinity of the power plant. The conversion technology considered is a 500 MW dedicated pulverised biomass thermal power plant, combined with post-combustion amine-based carbon capture. In a previous contribution, we evaluated the power generation efficiency of the facility at $26\%_{\rm HHV}$, including the CCS energy penalty.⁴

The value chain configurations are characterised by distinct:

• Biomass feedstock, b: miscanthus, switchgrass and short rotation coppice willow as archetypal dedicated energy crops, and wheat straw as an archetypal agricultural residue,

• Sub-region, sr, from which the biomass is imported: Brazil, China, EU, India and the USA are considered as potential regions of import, and discretised at the state/province level, resulting in 170 potential cells for biomass farming. Each cell is defined by its area and the position of its centroid.

• Land type, l, on which the biomass is grown: cropland, grassland, forest and marginal land. The different land scenarios are included to account for direct (LUC) and indirect (ILUC) land use change, *i.e.*, the direct and indirect CO₂ emissions associated with the conversion of a certain land type to bioenergy production. Different types of land are associated with distinct LUC and ILUC, and the resulting emissions are highly dependent on the biomass type, economic use of the land, region, timeframe considered, etc. As a simplification in this study, LUC and ILUC values, within a range of uncertainty, are attributed to the different land types, regardless of the region and biomass type. It was therefore considered that no LUC/ILUC was attributed to marginal land, medium LUC and high ILUC were attributed to cropland and grassland, as using these managed lands means an activity must be re-allocated elsewhere, and high LUC and no ILUC were attributed to forests. Converting a low vegetation land such as a marginal land, to a managed bioenergy crop with deep rooted perennial grasses, could result in negative land use change, *i.e.* net soil CO₂ sequestration.^{38,39} While these effects could improve BECCS CO₂ balance, we adopted the conservative approach of not considering them, given the uncertainty around their amplitude and permanence.

• Port, p, which is used for shipping the biomass from its region of origin to the region of conversion and sequestration. Each sub-region sr has access to a port p as long as there is a road access to this port.

(3)

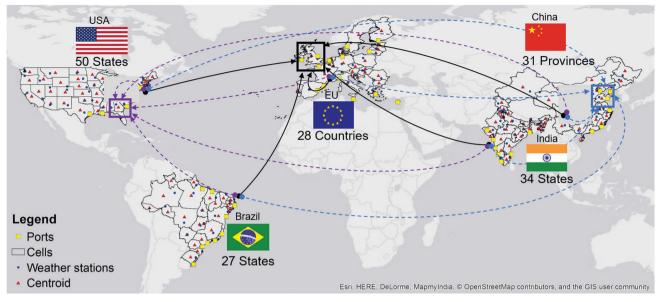


Fig. 2 Representation of the sub-regions sr (or cells) and ports p considered for BECCS value chain modelling in MONET. Each cell is defined by its area and the position of its centroid, which were calculated using ArcGIS 10.5.⁴⁰ The map also displays the location of the weather stations, indicated by the blue dot in each cell, and obtained from the software CLIMWAT 2.0,⁴¹ from which the climate data of each sub-region was collected. As an example in this figure, biomass can be shipped to the UK (black arrows), southern USA (purple arrows) and eastern China (blue arrows) for conversion and CO₂ sequestration.

or

A schematic of the current bio-geo-physical map of the MONET model is presented in Fig. 2, including the ports and biomass collection points.

2.2 Spatial discretisation and transport distance

Building on our previous work,^{3,4} the level of spatial discretisation was increased from the macro-region level - Brazil, China, EU, India, USA - level to the province/state level - Brazilian, Indian and US states, Chinese provinces, EU countries. A consequence of this discretisation in a change in the computation of the road distance for biomass pellet transport. Sub-regions are polygons represented geographically by the latitude Y(sr) and longitude X(sr) of their centroid. Similarly, ports are represented by their latitude $Y_P(p)$ and longitude $X_P(p)$. Three options are considered for biomass transport from a sub-region, sr, where biomass is produced, to a sub-region, srend, where biomass is converted into energy and CO₂ is stored: (1) road transport by heavy duty vehicles (HDV) if there is a road access between sr and sr_{end} , (2) a combination of road and sea transport by container ship, (3) and short distance transport (50k) by HDV if sr and sr_{end} are the same regions. For simplicity, rail and barge are not considered in this analysis. The optimal transport route - option (1), (2) or (3), and optimal ports p and p_{end} in option (2) – is determined by the optimisation program. The road distance considered in the model is therefore the euclidian distance between sr and sr_{end} in (1), and the summation of the euclidian distance between sr and p and between srend and pend in (2), corrected by a region-specific tortuosity factor *t*(sr):

$$D_{\text{road}}(\text{sr},\text{p}) = t(\text{sr}) \times R_{\text{earth}} \times \arccos(\sin Y_{\text{P}}(\text{p})) \times \sin Y(\text{sr}) + \cos Y_{\text{P}}(\text{p}) \times \cos Y(\text{sr}) \times \cos(X(\text{sr}) - Y_{\text{P}}(\text{p}))$$
(1)

 $tD_{\rm road}({\rm sr,sr_{end},p,p_{end}}) = D_{\rm road}({\rm sr,p}) + D_{\rm road}({\rm sr_{end},p_{end}})$ (2)

$$D_{\text{road}}(\text{sr}, \text{sr}_{\text{end}}) = \frac{t(\text{sr}) + t(\text{sr}_{\text{end}})}{2} \times R_{\text{earth}} \times \arccos(\sin Y(\text{sr}_{\text{end}}))$$
$$\times \sin Y(\text{sr}) + \cos Y(\text{sr}_{\text{end}}) \times \cos Y(\text{sr})$$
$$\times \cos(Y(\text{sr}) - Y(\text{sr}_{\text{end}}))$$

2.3 Key outputs of the modelling framework

In order to solve the optimisation model, the following outputs are obtained with the value chain modelling framework, for each sub-region sr, biomass b, port p, and land type l:

• $WU_{CO_2}(sr,b,l,p)$ is the water required to remove 1 ton of CO_2 from the atmosphere, in m³ per t_{CO_2} . The MONET tool calculates the water intensity of BECCS by adding three terms: the blue, the green and the grey water. In our model, the green water is considered to be the crop water demand which is met by precipitation, whereas the blue water is the additional amount of fresh water required to grow the biomass, and in the power plant. The grey water is the amount of polluted water resulting from the fertiliser use at the field level.⁴ In order to only account for the marginal amount of water required for BECCS, $WU_{CO_2}(sr,b,l,p)$ only includes the blue and grey water straw, the blue water associated with straw production is allocated to the production of wheat, and therefore considered to be zero.

• $PPLU_{CO_2}(sr,b,l,p)$ is the amount of land used by BECCS facilities to remove 1 ton of CO₂, in ha per t_{CO2}.

• FLU_{CO₂}(sr,b,l,p) is the amount of land harvested for biomass at the field level per ton of CO₂ removed, in ha per t_{CO_2} . In the case of biomass residues such as wheat straw, the land footprint associated with straw production is allocated to the production of wheat, and therefore considered to be zero for straw.

• NE_{CO₂}(sr,b,l,p) is the amount of net electricity produced in GJ per ton of CO₂ removed, accounting for the energy cost of BECCS value chain. The approach used to calculate this metric has been presented in detail previously,³ and is not repeated here.

• $BU_{CO_2}(sr,b,l,p)$ is the amount of biomass used to remove 1 ton of CO₂ from the atmosphere, in t_{DM} per t_{CO_2} .

• BioC(b) is the biomass carbon content in $\%_{DM}$.

• $CN_{CO_2}(sr,b,l,p)$ is the cumulative net amount of CO_2 stored by a BECCS configuration, over its lifetime, per hectare of land, in t_{CO_2} per ha.

• CNE(sr,b,l,p) is the cumulative net amount of electricity produced by a BECCS configuration, over its lifetime, per hectare of land, in MJ per ha.

• BET_{CO_2} is the CO₂ breakeven time of the BECCS configuration, *i.e.*, the time required for the system to be carbon negative.

• BET_E is the electricity breakeven time of the BECCS configuration, *i.e.*, the time required for the system to be energy positive.

2.4 Supply chain optimisation framework

The purpose of this work is to determine the optimal BECCS value chain required to remove 50 Mt_{CO_2} per year in a given region, by allocating the amount of CO_2 removed annually per configuration CO_2 rem(sr,b,l,p) while minimising or maximising different objective functions $[f_1, f_2, f_3, f_4]$:

• Minimisation of total water use tWU:

$$f_1 = tWU = \sum_{sr,b,l,p} WU_{CO_2}(sr,b,l,p) \times CO_2 rem(sr,b,l,p) \quad (4)$$

• Minimisation of total land use tLU which accounts for the harvested land in region sr, and the land used by the BECCS facilities:

$$f_2 = tLU = tFLU + tPPLU$$
(5)

Similarly to fresh water use, the cultivated land associated with the production of wheat straw is allocated to wheat production. Wheat straw land footprint at the field level is therefore not accounted for in the summation:

$$tFLU = \sum_{sr,b \neq Wheat,l,p} FLU_{CO_2}(sr,b,l,p) \times CO_2 rem(sr,b,l,p)$$
(6)

$$tPPLU = \sum_{sr,b,l,p} PPLU_{CO_2}(sr,b,l,p) \times CO_2 rem(sr,b,l,p) \quad (7)$$

• Maximisation of the total CO₂ efficiency $t\eta_{CO_2}$, *i.e.*, the ratio of the amount of CO₂ permanently removed tN_{CO_2} to the

amount of CO_2 stored in the biomass, $tBioCO_2$. The latter is directly related to the amount of biomass used:

$$f_3 = tBioCO_2 = \sum_{sr,b,l,p} BioCO_2(sr,b,l,p) \times CO_2rem(sr,b,l,p)$$
(8)

with

$$BioCO_2(sr,b,l,p) = BU_{CO_2}(sr,b,l,p) \times BioC(b) \times CtoCO_2$$
 (9)

$$tN_{CO_2} = \sum_{sr,b,l,p} CO_2 rem(sr,b,l,p)$$
(10)

$$t\eta_{\rm CO_2} = \frac{tN_{\rm CO_2}}{t\rm Bio\rm CO_2} \tag{11}$$

As the total amount of CO_2 removed is fixed, maximising $t\eta_{CO_2}$ is equivalent to minimising tBioCO₂. As $t\eta_{CO_2}$ is an nonlinear variable, tBioCO₂ is thus minimised to ensure the linearity of the model. It is worth noting that minimising the total amount of CO₂ stored in the biomass is equivalent to minimising the total amount of biomass used.

• Maximisation of the net electricity produced tNE by the BECCS value chain:

$$f_4 = tNE = \sum_{sr,b,l,p} NE_{CO_2}(sr,b,l,p) \times CO_2 rem(sr,b,l,p)$$
(12)

The preference-based procedure of using a weighted sum of the different objectives as a unique objective function was not used here for two reasons. First, the inherent diversity of the different objectives – land use, water use, CO_2 efficiency and net energy produced – make them complex to convert into one single objective. Secondly we estimated that preference of one objective over the others will be highly region specific, and choosing these factors arbitrarily could therefore give irrelevant results as to BECCS optimal value chain. Therefore, in the first instance, we chose to treat each of these objectives separately, and leave the multi-criteria, multi-stakeholder problem for future work. Thus, we have formulated four distinct scenarios which allow us to perform a series of thought experiments across the BECCS value chain. These four optimisation scenarios are subject to the following constraints:

• The configurations considered must be carbon negative within a relevant time-frame, *i.e.*, the $BET_{CO_2}(sr,b,l,p)$ must be smaller than the project lifetime, considered to be 50 years in this analysis:

$$BET_{CO_2}(sr,b,l,p) \le 50 \tag{13}$$

This constraint is equivalent to $CN_{CO_2}(sr,b,l,p)$ being positive:

$$CN_{CO_2}(sr,b,l,p) \ge 0$$
 (14)

• The amount of net CO₂ removed annually by the configuration, CO₂rem(sr,b,l,p) must be positive:

$$CO_2 rem(sr,b,l,p) \ge 0 \tag{15}$$

• In a first instance, we also constrained the configurations to be energy positive:

or

$$BET_{E}(sr,b,l,p) \le 50 \tag{16}$$

$$CNE(sr,b,l,p) \ge 0 \tag{17}$$

As electricity production is not the primary service delivered by BECCS, this constraint may be relaxed if the optimisation problem cannot solve.

• The total amount of CO₂ removed must be equal to the set CO₂ removal target:

$$tN_{CO_2}(sr,b,l,p) = CO_2 target$$
 (18)

An equality constraint was chosen over an inequality constraint in eqn (18), as an inequality constraint would lead to BECCS being deployed over the CO_2 removal target in the energy maximisation scenario.

• The amount of land harvested in each region for dedicated energy crops is limited by the availability LA(sr,l) of land type l in sub-region sr:

$$\sum_{b \neq Wheat,p} FLU_{CO_2}(sr, b, l, p) \times CO_2 rem(sr, b, l, p) \le LA(sr, l)$$
(19)

• Though no land footprint is attributed to wheat straw production, the amount of harvested land for wheat is each region is limited the wheat area availability WA(sr) in sub-region sr:

$$\sum_{p} FLU_{CO_2}(sr, wheat, cropland, p)$$

$$\times CO_2 rem(sr, wheat, cropland, p) < WA(sr)$$
(20)

To evaluate the extent of land use change under each optimisation scenario, the variable tLUC is calculated as the summation of all land types other than marginal land – *i.e.*, cropland, grassland and forest – used for the production of dedicated energy crops:

$$tLUC = \sum_{sr, b \neq wheat, l \neq marginal land, p} FLU_{CO_2}(sr, b, l, p)$$

$$\times CO_2 rem(sr, b, l, p)$$
(21)

2.5 Pareto-front analysis

The ε -constraint method was used to quantitatively evaluate the trade-offs between the four objective functions. For each combination of objective functions, f_j and f_k , the following optimisation problem was solved:

min
$$f_i$$
 (22)

s.t.
$$f_k \le \varepsilon_k^m \quad \forall k \ne j$$
 (23)

with ε the upper bound vector $[\varepsilon_k^1, \varepsilon_k^2, \dots, \varepsilon_k^m]$ linearly distributed between the lower and upper bounds of f_k , m being the number of points chosen for the purpose of this analysis.

2.6 Data curation

The model input data at the macro-region level has been reported in detail in previous contributions.^{3,4} However, biomass yield, climate data, and carbon intensity of electricity were desegregated at the state/province level. Ports and centroid locations, as well as distances between ports were also added. Furthermore, data related to land availability constraints, such as land cover (forest, grassland and cropland), marginal land availability and harvested wheat area were added to the model. The software ArcGIS⁴⁰ was used to process datasets obtained from the literature, and, aggregate the different values at the sub-region level. Fig. 3 illustrates three potential BECCS value chains for CO₂ storage in the UK, with key regional input data such as biomass yield, CO₂ intensity of the electricity, marginal land area and wheat harvested area. In a UK case study, though using domestic pellets would minimise the pellets' transport distance to the BECCS facility, factors such as the regional electricity carbon footprint, which significantly affects the carbon intensity of biomass pelleting activities, precipitation, which impacts biomass water footprint, biomass yield, which has multiple impacts on the value chain, or marginal land and wheat straw availability, which constraints the amount of BECCS that can be deployed without causing land use change, can be determining in the design of BECCS optimal value chain.

2.6.1 Sub-regional representation. Polygon shapefiles of the administrative boundaries of each macro-region were obtained from the ArcGIS databases.⁴⁰ All shapefiles were projected in the WGS-1984 coordinate system, before being merged into one world shapefile containing 170 cells. The latitude and longitude of the centroid of each cell, as well as the cell area, were calculated using ArcGIS, and used as inputs in the model. Fig. 2 shows the world map with the positions of the sub-regions centroid.




Fig. 3 Illustration of three potential BECCS value chain to a UK-based BECCS facility: using domestic pellets, which minimises transport distance, or importing pellets from Louisiana (USA) or Maranhao (Brazil). Factors such as carbon intensity of electricity, precipitation, biomass yield, marginal land area and wheat harvested area are paramount when determining BECCS optimal value chain.

2.6.2 Spatial disaggregation of the input data.

• Climate data: the location and data of climate stations were obtained from the software CLIMWAT,⁴² and were attributed to each sub-region. Fig. 2 provides the location of these stations. Climate data recorded by the weather stations, such as monthly precipitation, average low and high temperature, relative humidity, sunshine hours, wind speed, monthly precipitation, as well as the location and altitude of the stations, were then read in the software CROPWAT.⁴¹

• Yield data: yield data for different regions of the world were collected for each dedicated energy crop from the literature. When available, yield datasets with high regional discretisation were used.^{27,43} When the yield data of a sub-region sr was unknown, the yield of the sub-region with the closest climate conditions, according to the Koppen Climate Classification⁴⁴ was used. Wheat grain yield was obtained at the country level from the FAO.⁴¹ Low, median and high yields of each biomass type are provided in Tables 5–7 in Appendix A.

• Land cover: in order to determine the total cropland, grassland and forest area available in each sub-region sr, the MODIS global land cover with a spatial resolution of 15 arc second geographic was used.⁴⁵ Tables 2–4 in Appendix A provide the land cover per cell adapted from the MODIS database. Forest area was calculated summing Evergreen/Deciduous Needleleaf/Broadleaf forests with the mixed forest categories. Grassland and cropland land cover were directly obtained from the land cover categories.

• Marginal land area: in order to use a consistent dataset for all regions, the marginal land dataset from the Cai *et al.*²¹ study was used in this work. As a conservative approach, and to be consistent with other literature sources, only the lower bounds values (S1) from this study were considered. Similarly to land cover and wheat harvested area, the 30 arc second resolution raster file was processed to obtain the marginal land area in each sub-region, sr. Data is supplied in Tables 2–4 in Appendix A.

• Wheat harvested area: in order to constrain the amount of wheat straw available per region, the map of the world wheat harvested area with a spatial resolution of 5 minute geographic, obtained from the SPAM model,⁴⁶ was processed in ArcGIS⁴⁰ (Tables 2–4 in Appendix A). It is worth noting that the harvested area per cell can be greater than the cell size, in the case of multiple harvests per year.

• Road tortuosity: the road distance was computed using euclidian distance, corrected by a tortuosity factor. Approximate tortuosity factors were computed for each sub-region sr, by dividing the road distance of the centroid to the nearest port, by the euclidian distance between these two points. Computed tortuosity factors are provided in Tables 5–7 in Appendix A.

2.6.3 Uncertainty and variability of the data. To capture the uncertainty and/or variability of some of the model input data, the MONET framework can be run under different data scenarios:

• Median scenario: the average values of all parameters are used for the calculations,

• Low scenario or "Optimistic" scenario: values which minimise the water, land, CO₂ and energy intensities of BECCS

value chain are used to perform the calculations. Lower bound values of the land use change emissions, biomass moisture content, carbon and energy intensities of chemicals and input products, fertiliser and chemical input rates, processing energy requirements, electricity carbon footprint, average power generation of the electricity are used. However, upper bound values for biomass yield per region, biomass energy density and biomass carbon content are used.

• High scenario or "Pessimistic" scenario: values which maximise the water, land, CO_2 and energy intensities of BECCS value chain are used to perform the calculations. Upper bound values of the land use change emissions, biomass moisture content, carbon and energy intensities of chemicals and input products, fertiliser and chemical input rates, processing energy requirements, electricity carbon footprint, average power generation of the electricity are used. However, lower values for biomass yield per region, energy density and carbon content are used.

To avoid including additional degrees of freedom to the model, no range of uncertainty or variability was implemented for marginal land availability, harvested wheat area, land cover, road tortuosity and climate data. Quantifying the impact of uncertainty in MONET was the focus of a previous contribution.⁴ To assess the impact of the uncertainty of the model input data, thorough stochastic modelling would need to be performed. We leave this for future work.

2.7 Measuring BECCS impact on agricultural residues and land use change

In order to investigate BECCS economic-environmental impacts, three impact scenarios were considered in the optimisation framework:

• Scenario I: BECCS is only deployed *via* dedicated energy crops (DEC) grown on marginal land (MAL). Under this scenario, BECCS deployment does not cause land use change, and does not compete with other uses of agricultural residues (AR).

• Scenario II: BECCS is deployed *via* dedicated energy crops grown on marginal land and agricultural residues from cropland. BECCS economic-environmental impacts are limited to the use of agricultural residues.

• Scenario III: BECCS is deployed *via* dedicated energy crops from all land types, and agricultural residues from cropland. Under this scenario, BECCS deployment might compete with other markets and cause substantial land use change.

3 BECCS optimal value chain in the water-land-carbon nexus

In a first instance, this section presents different insights from the optimisation of the BECCS value chain required to remove 50 Mt_{CO_2} per year in the UK, under three different objective functions – water minimisation, land minimisation, and CO_2 efficiency maximisation, considering only DEC on MAL (I). To illustrate that the modelling framework can also be applied to meet other regional targets, this section includes the BECCS optimal supply chains required to meet US and China carbon removal targets, by storing CO₂ in southern USA, and in Eastern China, respectively.

3.1 The optimal structure of BECCS value chain

Fig. 4 presents the selected regions, ports, as well as marginal land use density in each cell (fraction of the total land used by BECCS), biomass pellets transport fluxes (arrows) and amount of net CO₂ removed per region for each objective function, in the median, optimistic and pessimistic data scenarios, to meet a UK target (black arrows). The coloured arrows illustrate how these optimal value chains may change as the location of the BECCS facility and CO₂ storage, and therefore the biomass transport distance, changes for the US (purple arrows) and China (blue arrows). A first conclusion in that the structure of the optimal BECCS value chain changes substantially depending on which metric is prioritised. Under the water minimisation scenario, represented in Fig. 4a, factors such a climate conditions, precipitation and yield play a central role in the water performance of each combination. In spite of substantial road and sea transport distance, regions from western and central Brazil are selected, owing to their combination of low carbon intensity of their electricity and high biomass yield, which highlights the strong trade-offs between transport and other supply chain parameters. As seen in Fig. 4b, when minimising land use, yield and supply chain emissions have a strong impact on the results, and productive coastal regions from Brazil are selected. Similar results are obtained in the CO₂ efficiency maximisation scenario (Fig. 4c), though domestic biomass is also selected in the balance to minimise CO₂ leakage from transport. When changing the CO_2 storage

location from the UK to Southern USA or Eastern China, the change in biomass transport distance significantly changes the optimal configuration in the carbon efficiency maximisation scenario, in which biomass transportation represents an important share of the overall CO_2 leakages along the chain. However from a water and land minimisation perspective, the optimal regions do not change significantly, which further confirms the low weight of transport distance as compared to other more prevalent factors, when it comes to resource conservation.

These results were also found highly dependent on the model input data. As regional yield, fertiliser use, and carbon footprint of the electricity change from the median to the optimistic scenario, thereby decreasing regional pellets' water and carbon footprints, other regions such as northern Europe are selected in the water minimisation scenario. In the land minimisation scenario, miscanthus from the US east coast and southern Europe is selected. This is highly dependent on the yield range considered for each region. In the CO₂ efficiency maximisation scenario, a balance of Miscanthus from UK and Brazil are also selected in the optimistic and pessimistic scenarios.

The trade-offs between these resources can be assessed by evaluating the total land use, water use, and biomass use under the three optimisation scenarios, which are also represented in Fig. 4. It is observed that water use, and to a smaller extent land use and CO_2 efficiency, are highly dependent on which metric is optimised. Water use increases threefold in the CO_2 maximisation scenario, as compared to the water minimisation scenario. CO_2 efficiency and land use variations are less important: regardless of the optimised metric, land use remains within 1.8–2.8 Mha for all scenarios, and CO_2 efficiency, within 48–54%. The trade-off

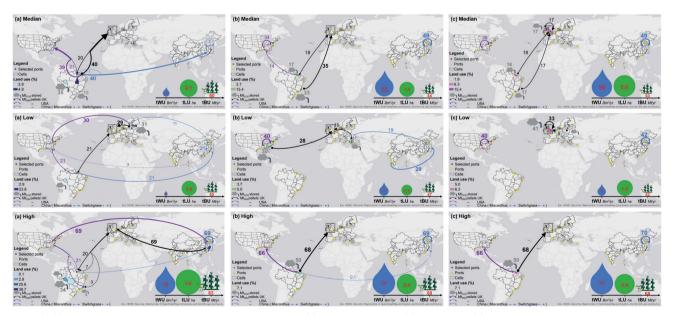


Fig. 4 BECCS optimal supply chain to minimise global water use (a), land use (b) and CO_2 efficiency (c) in the median, optimistic and pessimistic scenario. There are strong trade-offs between the resource efficiency indicators: water increases threefold from the water minimisation to the CO_2 maximisation scenario. Overall, biomass from regions with higher yield, lower grid carbon intensity and higher precipitation is chosen over indigenous biomass. Changing the storage location from the UK to Southern USA or Eastern China brings significant changes to the optimal configuration in the CO_2 maximisation scenario, where transport plays an important role, but limited changes to the water and land minimisation configurations.

between CO_2 efficiency and land use is less extreme: in the pessimistic scenario, the supply chain required to minimise the land use is the same as the one required to maximise the CO_2 efficiency.

The structure and the resource efficiency of BECCS optimal value chain are therefore very dependent on the objective function and parameters such as yield, fertiliser rate, climate and grid carbon intensity. Accurate weighing of each metric is required to determine an optimal BECCS value chain which reconciles all three metrics. Understanding which mechanisms might influence such decisions is therefore key to deploy BECCS optimally. Access to accurate data for the key model input parameters is also crucial.

3.2 Trade-offs within the water-carbon-land nexus

Trade-offs between the objective functions were quantitatively evaluated using the ε -constraint method, and pareto-fronts between each objective functions were generated. Fig. 5 shows the pareto curves between f_1, f_2 and f_3 in the median, optimistic and pessimistic scenarios.

As discussed in Section 3, the pareto lines in Fig. 5 indicate a strong trade-off between water use and the two other objective functions. When minimising water use, as total land use in constrained from 2.05 Mha to 1.85 Mha, water use increases from 5 to 13 Bm^3 per year. Moreover, as carbon efficiency is constrained from 48% to just under 54%, water use increases threefold. However, the shape of the pareto lines indicate the presence of tipping points: beyond 1.95 Mha and 50.1% efficiency, the rate of increase in water use significantly increases. In the case of land use against CO₂ efficiency, it is difficult to identify a tipping point, as the relationship is linear. However, the variation of the CO₂ efficiency is very limited for a given variation of land use, which shows that the optimal points are




Fig. 5 Pareto lines between water use, land use, and CO_2 efficiency, in the median scenario. There are strong trade-offs between water use and the other two objective functions. However, the trend of the pareto lines for these two relations ((a) and (b)) indicate the presence of tipping points which could reconcile the different objectives. CO_2 efficiency decreases marginally when land use increases, showing the proximity of these two optima.

closed for both optimisation scenarios. This analysis shows the complex interactions between BECCS resource efficiency indicators. Deploying BECCS such that each indicator is maintained close to the tipping point, rather than optimised, could be a preferred option to maximise BECCS overall resource efficiency.

4 Sensitivity analysis

4.1 Limiting supply

As pointed out in the introduction, reliably quantifying the availability of marginal land is complex owing in part to the diversity in definitions, methodologies and datasets used. In 2013, Fritz et al. downgraded Cai et al. lower bound estimates by 69%, bringing the total marginal land availability from 320 Mha to 98 Mha.²² Whilst the availability of agricultural residues can be evaluated with more certainty, determining which fraction of the residues is both recoverable from the field, and used for bioenergy without competing with other uses - for e.g. soil enriching or fodder, is not straightforward. In a recent study on biomass production potential from Brazil,47 the author evaluated the harvestable proportion of agricultural residues to be below 50%, and the proportion of harvested resource available for bioenergy, below 10%. Owing to this complexity, we use this section to study the impact of constraining the availability of marginal land and agricultural residues on the total land use and total land use change in our various scenarios. Fig. 6 shows the evolution of the total land use tLU in the land minimisation scenario, and the total land use change tLUC for the three objective functions, as a function of marginal land and crop residues availability, in the impact scenario III. Fig. 6a shows that the availability of residues plays a first order role in the system's total land use. When it is limited to 20%, total land use increases by several orders of magnitude. This can be explained by the fact that no land use at the field level, nor CO₂ emissions from farming, except from the additional fertiliser cost resulting from the removal of the residues from the field, were attributed to agricultural residues, as opposed to dedicated energy crops. As a grey water footprint is attributed to crop residues because of this additional fertiliser use, water use is decreased to a smaller extent. As far as land use change is concerned, when minimising land use and maximising the CO₂ efficiency, land use change only occurs when AR availability is limited below 20%. When minimising water use however, land use change can be high even in high marginal land availability. Though land use change results in higher lifecyle CO₂ emissions, as long as the water consumption per CO₂ removed is still attractive, bioenergy crops planted on former cropland and grassland may still be preferable in the water minimisation scenario. This indicates the presence of trade-off between carbon removal and water use.

To provide further insight into this emergent behaviour, Fig. 7 illustrates the evolution of BECCS optimal value chain in the water minimisation scenario at 0% residue use availability, and constraining marginal land availability from 100% to 10%.




Fig. 6 Total land use in the land minimisation scenario (a), and land use change in the water minimisation (b), land minimisation (c) and CO_2 efficiency maximisation scenarios, in impact scenario III. Residue availability has a first order impact on BECCS total land use. When minimising land use and maximising the CO_2 efficiency, land use change only occurs when AR availability is limited below 20%. When minimising water use however, land use change can be high even in high marginal land availability: there is a greater trade-off between carbon removal and water use.

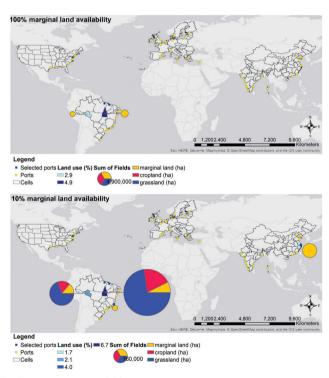


Fig. 7 Evolution of BECCS optimal value chain in the water minimisation scenario at 0% AR availability, and constraining marginal land availability from 100% to 10%.

As marginal land availability decreases, it is interesting to see that the same regions from Brazil are used, but both the amount and proportion of grassland and cropland used increase, as well as the land use density. Other regions that had not been selected before, such as China, also start appearing in the results when land availability is drastically constrained, supporting the conclusion that the nearest regions are not necessarily the optimal regions from a water perspective.

This study has provided insight into the important trade-offs between BECCS resource efficiency and economic-environmental impacts. It was shown that using agricultural residues could drastically relieve BECCS pressure on land use. In order to obtain the same result while avoiding competition with other uses of agricultural residues, using high productivity-high carbon content biomass such as algae, could be a promising alternative.⁴⁸ A second important trade-off exists between water use and land use change: minimising water use for BECCS might result in high land use change, particularly when the availabilities of marginal land and crop residues are constrained. This conclusion builds upon the previous contribution of Heck *et al.*,⁵ where this potential compromise was first alluded to. This further confirms that myopic focus on the trade-offs between BECCS environmental and economic performance is, at best, incomplete: there are complex interactions within BECCS environmental trade-offs which must be understood in order to deploy BECCS in a genuinely environmentally and ecologically benign manner.

4.2 Ramping up the carbon removal target

Though the UK projects a 50 Mt_{CO_2} per year, it is conceivable that more CO_2 might be stored in the UK for two reasons: (1) the UK's own target might increase over the course of the century,³⁵ and (2) as regional storage availability is limited, other regions could be willing to store CO_2 in the UK as well. As a thought experiment, we investigate how ramping up the targeted amount of CO_2 to be stored in the UK impacts the key performance indicators of BECCS value chain under the three optimisation and impact scenarios. The resulting water use under the water minimisation scenario (a), land use under the land minimisation scenario (b), CO_2 efficiency under the CO_2 efficiency maximisation scenarios, in the impact scenario III, are presented in Fig. 8.

Two insights can be derived from this thought experiment. First, the median world scale carbon dioxide removal can only be met in the impact scenario III, *i.e.*, when BECCS is deployed on all types of land and using crop residues in addition to dedicated crops. As observed in Fig. 8, by limiting bioenergy sourcing to dedicated energy crops from marginal land, up to 3.25 Gt_{CO2} per year can be removed by deploying BECCS and storing the CO2 in the UK (a). Adding residues (b) - wheat straw in this study, only marginally increases BECCS carbon removal capacity, which reaches 3.5 Gt_{CO2} per year. Naturally, expanding the MONET framework by implementing other regions - Africa, Russia, Indonesia, Australia, in MONET, as well as climatetailored biomass crops and agricultural residues would increase this carbon removal potential and nuance this statement. For example, in 2016, a total of 770 Mt of corn was produced by the five regions considered in MONET.49 Assuming a grain to corn stover ratio of 1:1,⁵⁰ a carbon content of 48%, the same carbon efficiency as using local wheat straw pellets (63% CO₂ efficiency, no long distance transport), and that all




Fig. 8 Minimal water use (a), minimal land use (b), maximal CO₂ efficiency (c) under impact scenario I (DEC on MAL), II (DEC on MAL and AR) and III (all land types, all crops) and land use change in impact scenario III under the three optimisation scenario (d).

corn stover is available for BECCS, 850 additional Mt_{CO_2} could be removed from the atmosphere. This being noted, this thought experiment shows the potentially negative economic-environmental impacts associated with BECCS deployment at the gigatone scale.

Secondly, resource mobilisation and land use change increase exponentially with the CO₂ removal target. Removing 12 Gt_{CO₂} per year would require at the minimum 5700 Bm^3 per year, 930 Mha, and producing at the maximum 35 TJ per year (net) at a maximum CO₂ efficiency of 33%, which, for comparison, is in the upper range of BECCS resource use in the literature. Smith et al.8 evaluated a land requirement of 380-700 Mha, and a marginal water requirement, as compared to the water consumption of a counter factual scenario, of 720 Bm^3 to meet a 12 Gt_{CO_3} per year target. In Heck et al.,⁵ removing 5 Gt_c per year with bioenergy, resulting in a net removal of 8 to 10 Gt_{CO2} per year depending on the CO₂ efficiency of the process, requires between 1000 and 4000 km³ of blue water use (no grey water considered), depending on the weighting of the objectives in the objective function. This shows that though more CO₂ storage might be available in the UK, there is a limit beyond which CO₂ storage in the UK is no longer resource nor CO₂ efficient, which confirms the need for multi-polar systems when deploying negative emissions at the gigatone scale.

5 Energy production or resource conservation?

In the final section of this paper, we focus on the technical element of the trilemma, *i.e.*, BECCS net electricity production potential. Fig. 9 presents the total water use (a), land use (b), CO_2 efficiency (c), net electricity produced (d) and land use change (e) in the four optimisation scenarios, in the impact scenario I.

It is observed that energy maximisation presents much stronger trade-offs with the other metrics: water use and land use increase fivefold, land use change by two orders of magnitude, and CO_2 efficiency decreases by 13 efficiency points, when maximising electricity production. This can be explained by the fact that, in order to maximise electricity production per amount of CO_2 removal target, the ratio of energy production per amount of CO_2 removed needs to be maximised. This leads to the selection of regions featuring a high net electricity production, and/or a low net CO_2 removal, *i.e.*, in the latter, regions that are inefficient at removing CO_2 from the atmosphere. This results in a high water use, land use and low carbon efficiency. Another interesting insight from this analysis is that in the pessimistic scenario, the system cannot be net electricity positive.

All of these results highlight the strong trade-offs between net electricity production and CO_2 efficiency, which is consistent with other studies in the literature.^{3–5,51,52} In these studies, it was shown that BECCS services – CO_2 removal and electricity production – mutually exclude each other. However, this contribution takes the analysis further by showing that the duality is not only between electricity production and CO_2 removal, but for

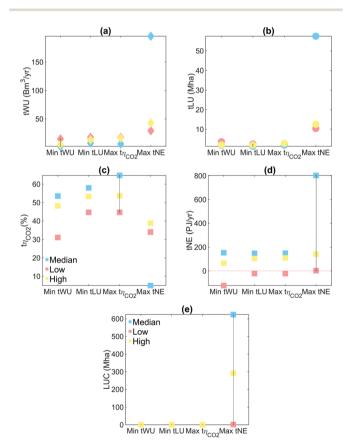


Fig. 9 Total water use, land use, and CO_2 efficiency, in scenario I, and land use change (scenario III) under four objective functions, in the median, pessimistic and optimistic scenarios. Energy maximisation presents much stronger trade-offs with the other metrics: to maximise energy the ratio of energy production per CO_2 removed needs to be maximised, which results in a high water use, land use, low carbon efficiency and land use change. Only focusing on energy production and negative emissions is detrimental to BECCS environmental performance.

a given CO_2 removal target, between electricity production and BECCS land use, water use, CO_2 efficiency and land use change. One should therefore consider all of BECCS' KPIs when designing its supply chain, as focusing only on BECCS main services – CO_2 removal and electricity production – can ultimately counteract the ostensible positive environmental impact of BECCS.

Taking this point further, one can postulate the existence of a global BECCS supply chain which can satisfy both BECCS' energy production objectives and resource use constraints. Annual negative emissions requirements between 1.8 to 9.9 Gt_{CO_2} by 2050 have been predicted by integrated assessment models in order to maintain a 2 °C trajectory with median values around 7 Gt_{CO2} per year.^{5,53} Projections of primary energy delivered by BECCS in 2050 can be found between 35 and 120 EJ per year depending on the scenario, with an average around 80 EJ per year.^{11,54,55} By removing 50 Mt_{CO₂} per year in 2050, the UK would therefore be contributing to approximately 0.7% of the world CO₂ removal target. Assuming that the UK would remove CO₂ efficiently from the atmosphere, only 0.7% of the world marginal land available could therefore be mobilised to meet the UK CO2 removal target. Using the 390–1107 Mha from Cai et al.,²¹ the UK could therefore reasonably use up to 2.2-7.8 Mha of marginal land. By this contribution to global negative emissions, the UK should also theoretically supply 570 PJ per year of primary energy, or generate approximately 170 PJ per year of electricity. The droplets on Fig. 10 represent the total electricity generated tE for different land constraints, under the energy maximisation scenario. Land use is separated in three zones: the "safe" zone in green, where land use is constrained to 2.2 Mha, the uncertainty zone in yellow, where land use is constrained under 7.8 Mha, and the forbidden zone in red. The system's total water use is represented by the colour scale, and the total biomass use, by the size of the droplets. Energy production in the water, land and biomass minimisation are also represented for comparison by the triangles.

Fig. 10 shows that, even while maintaining the total land use in a "safe" zone (*i.e.*, inferior to 2.2 Mha), BECCS electricity production objective is met; the markers are outside of the grey area. Though maximising energy production drastically increases water, land and biomass use, it is nevertheless possible to reconcile BECCS energy generation objective with land use constraints. Similarly, the triangles representing the water, land and CO_2 efficiency minimisation and maximisation are also located in, or close to, the safe zone. Though there may be strong trade-offs between these resource efficiency indicators, they are all compatible with a safe land use.

6 Relevance to policy makers

In this study, we have identified the complex interactions existing between BECCS technical and environmental




Fig. 10 BECCS total electricity generated under different land constraints, in the energy maximisation scenario (droplets), and the water, land and CO_2 efficiency minimisation and maximisation scenarios (triangles). Water use is represented by the colour scale, and biomass use, by the markers' size. Even when land use is constrained to a "safe" value (green zone), the UK electricity generation objective consistent with a 50 Mt_{CO2} per year target is met.

performance indicators. Assessing BECCS systems from a marginal cost per ton of CO_2 removed would therefore be incomplete. In particular, the strong trade-offs between water use and land use change, as well as between energy production and all of BECCS impacts, showed that one cannot optimise these systems from the perspective of a unique environmental impact. A sustainability standard which does not only regulate biomass maximum carbon intensity, but also BECCS water, land and CO_2 efficiencies, as well as land use change, will be required to ensure that BECCS is deployed within sustainable boundaries.

Growing perennial grasses on marginal land, whilst sustainable, might not be practical.⁵⁶ Actively engaging and incentivising all stakeholders of BECCS value chain, including farmers, will be crucial in unlocking BECCS deployment.

Furthermore, in meeting a regional carbon removal target, the prevalence of imported biomass in the optimisation results highlighted the preeminence of parameters such as yield, CO₂ intensity of electricity, and climate data, over transport distance. Regions with good compliance with these parameters were repeatedly selected regardless of the CO₂ storage location. One implication of this is that BECCS policy frameworks will need to consider the logistics, and negative emissions accounting of a system where regions meet their carbon removal target with imported biomass. Another implication of this is, were CO₂ storage to be available in regions providing sustainable biomass, for example Brazil in this case study, a potentially important share of the global carbon removal target could be achieved by a 100% Brazilian BECCS value chain. How much of the world carbon removal target could be met with this value chain, as well as the potential environmental and economic trade-offs between local and international value chains, are important research questions to tackle. If we take this thought experiment further in the context of meeting a global CO₂

Paper

removal target, it is conceivable that a region A meets its target using biomass feedstock from a region B to store CO_2 in a region C. Integrating the multi-polarity of negative emissions in the design of policy frameworks will likely be a crucial policy challenge for BECCS. Implementing different CO_2 storage sites, as well as a CO_2 transport and storage value chain model, into MONET, is however required to investigate these challenges further.

7 Conclusions

In this contribution, we have presented a framework which enables the study of the complex relationship between the ability of BECCS to be net energy positive, net carbon negative, and the broader environmental impacts of large-scale deployment of this technology. In the context of determining the extent to which each NET should be deployed for efficient and sustainable CO_2 removal, this framework could be applied to other NETs.

By highlighting the trade-offs between BECCS resource efficiency, environmental performance and technical performance, this study shows that the design of BECCS value chain needs to be performed in the prism of all BECCS KPIs. Strong trade-offs with tipping points were identified between water use and the other two resource efficiency indicators in particular. How to build an objective function which reconcile all of BECCS' KPIs, while accounting for how BECCS performance may vary from one region to another, is therefore a key research challenge to be addressed.

Another conclusion is that, factors such as yield, carbon intensity of power, and high precipitation led to the selection of imported biomass over indigenous biomass. The design of policy frameworks considering the carbon accounting implications of using foreign biomass to store CO_2 in a given region, thereby meeting this region's carbon removal target, are paramount to facilitate local BECCS deployment. What is already complex at the megatone scale becomes manifold at the gigatone scale: how to regulate systems where biomass is imported from a productive region A, CO_2 is stored in region B with abundant storage, to meet the CO_2 removal target of a region C, as well as how to allocate credits among these actors, are key research and policy question to be investigated.

The availability of sufficient marginal land and agricultural residues were observed to be of paramount importance to our results. However, it is also recognised that their availability is controversial, at best. To provide insight into the impact of their respective availability, a sensitivity analysis of the optimisation results to the availability of marginal land and agricultural residues was performed. A first insight from this analysis is that agricultural residues exerted a first order impact on BECCS land use; residues being attributed low agricultural carbon and water footprints, total land use decreased by several orders of magnitude when using agricultural residues. Assessing precisely how much agricultural residues could be used for BECCS, without trespassing on other uses, could drastically relieve the pressure of BECCS on land use. A strong trade-off between water use and land use change was also identified: when minimising water use, using non-marginal land from low water footprint regions, and therefore causing land use change emissions, was preferable to using marginal land from higher water footprint regions. Water use and land use change being two critical sustainability indicators for BECCS, one should therefore be careful with potential direct and indirect land use effects when deploying BECCS from a water-saving perspective, and *vice versa*.

When ramping up the CO_2 removal target, it was found that the world median CO_2 removal target of 12 Gt_{CO_2} per year was only achievable by storing CO₂ in the UK when residues and all land types were considered for BECCS. It was also found that water use, land use and CO₂ efficiency did not increase linearly with the CO₂ removal target, as marginal land from "sustainable" regions get depleted as the CO₂ target increases, thus leading to the selection of other types of land or less sustainable regions. This shows that, though the UK has the storage capacity to achieve more CO₂ storage than its current target, there will be a clear trade-off between how much and how efficient carbon dioxide removal from the UK will be. This further confirms the need for multi-polar systems when deploying negative emissions at the gigatone scale. Implementing other storage sites in MONET will be required to investigate the optimal structure of the world CO₂ network for carbon dioxide removal.

Finally, maximising net energy production led to a drastic increase in the system's water use, land use, and land use change, as well as a decrease in CO_2 efficiency. This is explained by the fact that, at a given CO_2 removal target, regions which are less efficient at removing CO_2 are selected to maximise the amount of energy produced. A key insight from this result is that focusing exclusively on energy production and CO_2 removal is detrimental to BECCS resource efficiency and impact on ecosystems.

As a final thought experiment, we considered the proportional share of marginal land available, to what the UK is contributing to the world global carbon removal target by 2050, as a safe land use boundary in the context of UK CO_2 removal target. Were BECCS in the UK to be deployed subject to this land use constraint, it was found that BECCS electricity production objectives were still met. What this last analysis shows is that, whilst BECCS KPIs may be negatively correlated, they are, however, not incompatible: providing the right choices are made along BECCS value chain, BECCS can be deployed in a way that meets altogether its carbon removal objective, electricity production objective, and land use constraints.

Conflicts of interest

There are no conflicts of interest to declare.

Fig. 11.

Paper

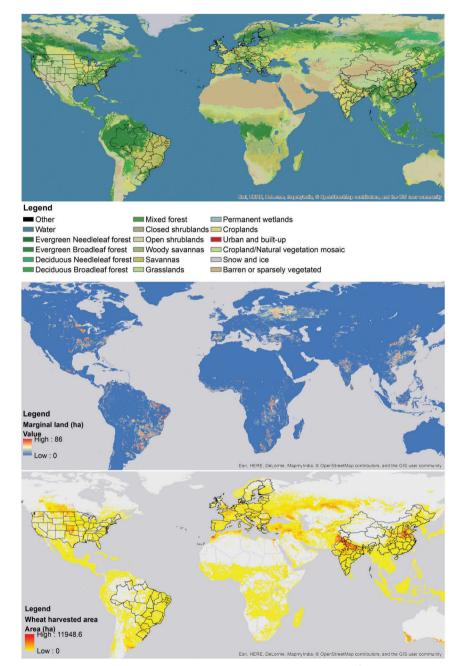


Fig. 11 Land cover with a resolution of 15 arc second geographic, adapted from the MODIS dataset,⁴⁵ marginal land area with a resolution of 30 arc second geographic, adapted from Cai et al.,²¹ and harvested wheat area with a resolution of 5 minute geographic, adapted from MAPSPAM.⁴⁶

Table 2 Land cover, marginal land and harvested wheat area (Brazil and China)

Sub-region sr	Cropland ^a (ha)	Grassland ^a (ha)	Forests ^a (ha)	Marginal land ^b (ha)	Harvested wheat area ^c (ha	
Acre	4529	8744	14 796 138	65 464	0	
Alagoas	198 379	104 788	21 278	538378	0	
Amapa	75 662	99 536	12048270	755 909	0	
Amazonas	42 148	264 495	149210755	365 120	0	
Bahia	2 332 945	2400444	2888010	7 602 747	139	
Ceara	181 331	126 727	84 689	1 999 432	0	
Distrito Federal	1368	786	2198	229 625	2057	
Espirito Santo	71 259	42 667	469 747	617785	0	
Goias	3 256 098	425 759	188 220	5 852 712	12 694	
Maranhao	528 157	156 577	4 809 429	4 763 187	0	
Mato Grosso	6 351 939	3 312 967	34 375 031	6 428 726	786	
Mato Grosso do Sul	1 656 405	4894778	1 779 656	7 629 190	72 331	
Minas Gerais	2 313 868	617 202	2 107 767	9 237 942	16247	
Para	1.6 315 938	296 578	95 045 602	3 428 322	0	
Paraiba	132 971	277 816	14484	639 569	0	
Parana	3 755 553	1 494 937	4 854 533	5 706 602	1 143 865	
Pernambuco	220 129	421 072	41 975	990 765	0	
Piaui	286 497	128 473	168 498	3 462 185	0	
Rio de Janeiro	93 119	45 561	791 173	397731	0	
Rio Grande do Norte	167 051	388 911	8178	80 691	0	
Rio Grande do Sul	6 038 675	7 898 979	2 952 537	7 876 103	851 954	
Rondonia	84 925	351 732	14 417 261	690 893	0	
Roraima					0	
Santa Catarina	23 040	2 278 561	17 130 388	109 482	80 420	
	547 862	108 752	4 919 658	1 196 099		
Sao Paulo	3 426 641	2 921 162	4 024 247	6 118 991	62 872	
Sergipe Tocantins	73 177	192 151	10 946	1 141 001	0	
Tocantins	365 163	1 351 570	795 593	1 369 558	0	
Anhui	9 008 590	53 236	3 584 114	1240645	1 350 540	
Beijing	492 158	235 133	573 765	163 759	37 377	
Chongqing	1 680 121	12 125	3 868 173	1 380 615	297 372	
Fujian	788 547	62 106	8 141 189	476 468	5798	
Gansu	3 626 168	16 539 874	2 687 901	2 306 145	649 244	
Guangdong	2175471	172 886	7 938 579	1 371 573	4155	
Guangxi Zhuang	1 232 313	55 201	9722985	5 379 165	8483	
Guizhou	2 704 320	126 664	7 237 191	3 620 343	374 575	
Hainan	302 004	12377	1 201 111	930152	0	
Hebei	9 208 888	5 640 878	2 278 828	3 039 792	1 137 209	
Heilongjiang	17 993 228	1 568 397	16 426 106	558354	80 519	
Henan	12 928 238	155 665	1 986 088	577 474	2 454 033	
Hubei	7 266 175	85 837	8 066 266	1 307 885	460 302	
Hunan	3 919 821	77 140	9784477	6 191 445	53 940	
Inner Mongolia	9 129 420	60 913 567	10 450 574	4 567 746	431 015	
Jiangsu	7 828 318	172 257	426 293	76 925	1 146 168	
Jiangxi	3 711 596	97 963	8730602	2 874 002	13 663	
Jilin	7 285 991	1 828 079	7 195 687	541 587	13 946	
Liaoning	7 576 514	770 886	3 422 504	1 080 172	16 192	
Ningxia Hui	778 026	3 550 427	35 323	38 509	195 390	
Qinghai	175 418	49 673 691	122 859	9721	87 259	
Shaanxi	5 021 710	5 487 258	8 947 397	1 862 026	87 239 820 401	
Shandong						
	13 244 852	481 401	222 284	899 162 024	2 179 912	
Shanghai	426 168	21 090	11 685	924	24 371	
Shanxi	5 694 177	6219109	2748386	4 463 694	347 502	
Sichuan	7 510 980	18 591 401	18 967 825	1 804 046	1 365 270	
Tianjin	781 202	95 431	65 487	232 087	83 118	
Xinjiang Uyghur	6 343 242	38744012	972 599	328 036	614 630	
Yunnan	3 296 249	2 467 111	23 357 628	2 062 503	296 344	
Zhejiang	2 010 763	87 662	6 559 833	2 627 207	52 596	

^{*a*} Obtained using the MODIS dataset.^{45 *b*} Obtained using marginal land dataset from Cai *et al.*^{21 *c*} Obtained using harvested wheat area from MAPSPAM.⁴⁶

Table 3 Land cover, marginal land and harvested wheat area (EU and India)	Table 3	Land cover, margina	l land and harvested	wheat area (EU and India)
---	---------	---------------------	----------------------	---------------------------

Sub-region sr	Cropland ^a (ha)	Grassland ^a (ha)	Forests ^a (ha)	Marginal land ^b (ha)	Harvested wheat area ^c (ha
Austria	1 319 031	842 569	4675105	128 706	282 813
Belgium	1024230	53 644	774 849	57 725	214 079
Bulgaria	5254531	252653	3 297 318	539 360	1 033 864
Croatia	1354763	282974	2118367	168 810	175 656
Cyprus	136 242	109 522	6023	0	3778
Czech Repulic	2520362	32 382	2734562	214 332	822 510
Denmark	2657579	144640	534542	83 300	637 964
Estonia	247 227	136 588	2 791 997	1 135 160	84 237
Finland	241 660	413 429	16 023 481	8131	208 661
France	25 978 359	1 312 489	11 362 939	965 400	5 232 675
Germany	10 909 863	439 866	11744615	682 462	3 125 000
Greece	4 023 178	936396	2491456	484 050	782 626
Hungary	5 660 820	25761	1218001	17 440	1 122 858
Ireland	260 390	5 468 795	945 376	1 521 890	92 307
Italy	12 011 815	1691114	7 546 617	504 537	1 403 762
Latvia	659 162	87 630	3 490 681	1 412 723	190 236
Lithuania	2 067 600	45 105	1 911 212	1 590 564	356 901
Luxembourg	53 896	2422	98199	1197	13 983
Malt	14 076	4765	63	0	1271
Netherlands	877 514	433 984	502 616	92 373	129 071
Poland	11 508 067	120 279	9 252 908	2 379 125	2 231 857
Portugal	2 093 644	383 453	929271	1 231 336	136 834
Romania					
	11 501 556	178 437	6 645 953	649723	2 227 876
Slovakia	1 552 104	23 795	2 256 763	157 578	364 508
Slovenia	158 684	23 056	1 344 556	33 323	30 460
Spain	18 065 148	3742814	6 262 563	6 855 073	2 122 749
Sweden	1004257	1482953	23 932 037	457 029	362 669
United Kingdom	6737751	10 162 945	4 223 947	1 548 376	1 871 551
Andaman and Nicobar	3114	283	591 316	0	0
Andhra Pradesh	13 307 665	148698	1 226 242	1 822 939	9656
Arunachal Prades	45 325	498197	6 873 113	76 598	3832
Assam	2 186 102	182 621	1 517 693	230 982	48 111
Bihar	7 958 426	80 600	170385	98 260	1 448 068
Chandigarh	1919	31	31	0	606
Chhattisgarh	3 574 992	26 689	1 851 355	121 831	74 003
Dadra and Nagar Hav.	6920	79	1195	81	486
Daman and Diu	1541	236	79	0	430
Delhi		230 975	0	668	19 580
	59 652				
Goa	16 592	3366	79 091	15 565	0
Gujarat	11 575 614	629 627	202 106	1 385 494	965 926
Haryana	4 227 329	1148	34914	1615	1 166 419
Himachal Pradesh	368 843	1 099 908	1621224	75 187	369 177
Jammu and Kashmir	1 371 071	3 725 986	1685578	180 611	255 180
Jharkhand	3 990 261	33766	595 924	575 933	40 523
Karnataka	11123324	122450	1 207 181	1 062 742	1907
Kerala	322 889	3255	1 492 373	646 538	0
Madhya Pradesh	19 787 998	454460	1167565	4 639 474	2 681 304
Maharashtra	20 504 500	32 319	1 299 262	4 310 811	752 521
Manipur	75 316	6951	1 838 585	6912	4
Meghalaya	52 606	15 507	948206	113 400	2041
Mizoram	1620	220	1 894 903	449	6
Nagaland	5347	739	1 319 236	5319	1179
Odisha	4 668 909	60187	1 482 198	625 011	5571
Puducherry	32 020	440	598	3034	0
Punjab	4 768 287	1069	62 908	7026	1 575 621
Rajasthan	20 165 145	641 437	115671	1 237 793	2 497 183
Sikkim			315 293		
Tamil Nadu	2044	202 531		991 645.084	4383 0
	4 049 505	45 262	790 576	645 084	
Tripura Utter Drodech	40 607	47	168 152	29 486	2576
Uttar Pradesh	22 126 919	120 484	411 306	106 167	5 948 565
Uttarakhand West Bengal	543 427	906 279	2 525 426	206 629	372 507
	5 937 802	32 272	369975	279391	173 474

^{*a*} Obtained using the MODIS dataset.^{45 *b*} Obtained using marginal land dataset from Cai *et al.*^{21 *c*} Obtained using harvested wheat area from MAPSPAM.⁴⁶

Table 4 Land cover, marginal land and harvested wheat area densities (US)

Sub-region sr	Cropland ^a (ha)	Grassland ^a (ha)	Forests ^a (ha)	Marginal land ^b (ha)	Harvested wheat area ^{c} (ha)
Alabama	398 268	93 544	5 593 855	1 321 772	20 123
Alaska	53 534	22 091 691	12490700	1465	0
Arizona	426 687	4 690 061	817 390	0	39139
Arkansas	3420507	444 584	5 028 882	2 385 539	143 730
California	4 272 905	5856101	9 065 097	43 884	115 813
Colorado	1 102 173	20 027 818	3 811 132	517 109	780 620
Connecticut	7801	739	985 385	10 051	1
Delaware	93 339	4624	61178	340 892	20733
Florida	791 771	537 435	3 669 668	834105	3783
Georgia	888 444	104 033	5 173 742	1 244 597	60 912
Hawaii	48014	156 577	643 340	0	0
Idaho	1 921 733	11 494 023	7 467 668	47 955	320 812
Illinois	10 087 503	30778	467 639	2817237	317 882
Indiana	5 005 968	21 341	824 892	511783	170 056
Iowa	12179716	5756	45 639	358 433	23 168
Kansas	5615008	14 634 921	15 695	1 153 356	3 656 919
Kentucky	1874710	27 727	3 890 270	1 513 903	143 754
Louisiana	1 953 391	74 687	3 315 499	647 123	49 933
Maine	35747	7014	7 676 144	98 527	0
Maryland	240 810	5504	755977	845 353	53 500
Massachusetts	14 909	4985	1 598 136	99 517	0
Michigan	1 6 2 1 0 1 9	51 128	6 890 900	350 089	247 566
Minnesota	10194383	96783	6 001 748	4 858 069	688 062
Mississippi	1783 635	45 938	4 278 708	1733077	38 206
Missouri	5 507 341	43 938 811 555	3 171 928	3 038 770	321 011
Montana	1 954 948	27 522 033	7 857 145	1 938 973	1 325 102
Nebraska					689 084
Nevada	8 139 317	$\frac{11445049}{15611892}$	16387 222819	96 447 2515	3646
	187 795				3646 0
New Hampshire	5536	2579	2 235 391	6674	
New Jersey	100 511	12157	819781	402 441	9632
New Mexico	389 964	13 555 191	1 196 723	1411	89 403
New York	191 208	12 236	7 235 303	160 895	38 571
North Carolina	875 989	41 818	5 136 186	2 525 415	175 674
North Dakota	13716895	3 926 992	38 153	2072281	3 254 269
Ohio	3 888 697	14 626	1 848 257	184 961	357 388
Oklahoma	1 285 391	12 604 767	696 497	606 886	1 639 241
Oregon	1 341 064	10 866 425	11766586	22684	299 564
Pennsylvania	499219	11 135	6 103 784	547 859	58 523
Rhode Island	5001	362	196382	16414	0
South Carolina	214200	51 380	3 274 782	428 381	60 940
South Dakota	8 018 063	11175820	368 812	376 552	615 808
Tennessee	1394394	35 008	4 274 163	1 789 359	87 527
Texas	5 602 049	37 201 942	1 626 854	2 780 385	1 058 287
Utah	498 464	11 978 962	967 047	3124	50 872
Vermont	12 125	2438	2 060 885	61	4
Virginia	299 991	18951	5710124	1 118 266	63 834
Washington	1886521	4 691 697	9 833 514	93 421	699 836
West Virginia	57 765	15 428	5 037 956	137 764	1983
Wisconsin	2436286	35 165	5046464	3 277 713	84 259
Wyoming	217786	22 124 670	2 473 527	41 702	56 313

^{*a*} Obtained using the MODIS dataset.^{45 b} Obtained using marginal land dataset from Cai *et al.*^{21 c} Obtained using harvested wheat area from MAPSPAM.⁴⁶

Table 5	Regional road	tortuosity and	biomass yield	(Brazil and China)
---------	---------------	----------------	---------------	--------------------

Sub-region sr	Road tortuosity ^a t(sr)	Miscanthus yield ^b	Switchgrass yield ^c	Wheat yield ^d	Willow yield
Acre	1.4	32.3-34.7 (33.5)	14-18 (16)	2.2-2.8 (2.6)	_
Alagoas	1.3	1-32.3 (14.6)	2-6(4)	2.2-2.8(2.6)	—
Amapa	2.2	32.3-34.7 (33.5)	14-18 (16)	2.2-2.8(2.6)	—
Amazonas	2.4	15-41 (26.8)	10-18 (16)	2.2-2.8(2.6)	—
Bahia	1.3	32.3-34.7 (33.5)	6-12 (8)	2.2-2.8(2.6)	_
Ceara	1.5	32.3-34.7 (33.5)	8-14 (10)	2.2-2.8(2.6)	
Distrito Federal	1.3	32.3-34.7 (33.5)	14-18 (16)	2.2-2.8(2.6)	_
Espirito Santo	1.4	32.3-34.7 (33.5)	10-14 (12)	2.2-2.8 (2.6)	_
Goias	1.4	12-22.8 (17.2)	14–18 (16)	2.2-2.8 (2.6)	_
Maranhao	1.3	32.3-34.7 (33.5)	14–18 (16)	2.2-2.8 (2.6)	_
Mato Grosso	1.5	32.3-34.7 (33.5)	14–18 (18)	2.2-2.8 (2.6)	_
Mato Grosso do Sul	1.1	12-22.8 (17.2)	10-18 (16)	2.2-2.8(2.6)	_
Minas Gerais	1.4	12–22.8 (17.2)	6-14 (12)	2.2-2.8 (2.6)	_
Para	1.6	32.3-34.7 (33.5)	10-18 (18)	2.2-2.8 (2.6)	_
Paraiba	1.5	32.3-34.7 (33.5)	6-10 (8)	2.2-2.8 (2.6)	_
Parana	1.5	12-22.8 (17.2)	10-18 (12)	2.2-2.8 (2.6)	
Pernambuco	1.1	1-32.3(14.6)	1-6 (4)	2.2-2.8(2.6)	_
Piaui	1.3	32.3-34.7 (33.5)	6-14 (10)	2.2-2.8(2.6)	_
Rio de Janeiro	1.5	12-22.8 (17.2)	10-14 (12)	2.2-2.8(2.6)	_
Rio Grande do Norte	1.5	12-22.8 (17.2)	6-10 (8)	2.2-2.8(2.6)	_
Rio Grande do Sul	1.3	12-22.8 (17.2)	8-14 (10)	2.2-2.8 (2.6)	_
Rondonia	1.6	32.3-34.7 (33.5)	14-18 (16)	2.2-2.8 (2.6)	_
Roraima	2.5	32.3-34.7 (33.5)	10-14 (12)	2.2 - 2.8 (2.6) 2.2 - 2.8 (2.6)	_
Santa Catarina	1.4	12-22.8 (17.2)	$10^{-14}(12)$ $10^{-18}(14)$	2.2 - 2.8 (2.6) 2.2 - 2.8 (2.6)	_
Sao Paulo	1.3	12-22.8 (17.2)	10-18 (16)	2.2 - 2.8 (2.6) 2.2 - 2.8 (2.6)	_
Sergipe	1.3	32.3-34.7 (33.5)	1-6 (4)	2.2 - 2.8 (2.6) 2.2 - 2.8 (2.6)	_
Tocantins	1.3	32.3-34.7 (33.5)	14–18 (16)	2.2 - 2.8 (2.6) 2.2 - 2.8 (2.6)	_
Anhui	1.2	27.7-30 (28.9)	14-18 (16)	4.7-5.2 (5.0)	_
Beijing	1.1	25.4-27.7 (26.6)	2-10(6)	4.7-5.2 (5.0)	_
Chongqing	1.4	23.1-27.7 (25.4)	14-18 (16)	4.7-5.2 (5.0)	_
Fujian	1.4	30-32.3 (31.2)	10-14(12)	4.7-5.2 (5.0)	
Gansu	1.2	0-0 (0)	0-2 (1)	4.7-5.2 (5.0)	
Guangdong	1.3	30-32.3 (31.2)	10-18 (14)	4.7-5.2 (5.0)	_
Guangxi Zhuang	1.3	27.7–32.3 (30)	6-18 (12)	4.7-5.2 (5.0)	_
Guizhou	1.2	23.1-27.7 (25.4)	6-18 (16)	4.7-5.2 (5.0)	_
Hainan	1.1	32.3-34.7 (33.5)	2-6(4)	4.7-5.2 (5.0)	_
Hebei	1.0	20.8-27.7 (24.3)	2-10(6)	4.7-5.2 (5.0)	_
Heilongjiang	1.1	13.9-25.4 (19.6)	6-18 (14)	4.7-5.2 (5.0)	
Henan	1.2	23.1-27.7 (25.4)	6-18 (12)	4.7-5.2 (5.0)	_
Hubei	1.2	25.4-32.3 (28.9)	10-18 (16)	4.7-5.2 (5.0)	_
Hunan	1.4	27.7-30 (28.9)	10-18 (12)	4.7-5.2 (5.0)	
Inner Mongolia	1.4		0-10(4)		_
. 0		0-13.9(6.9)		4.7-5.2(5.0)	_
Jiangsu Jiangwi	1.2	25.4-30 (27.7)	10-18 (16)	4.7-5.2(5.0)	
Jiangxi	1.3	27.7-30 (28.9)	10-14(12)	4.7-5.2(5.0)	
Jilin Lisanina	1.1	18.5 - 30(24.3)	8-14 (12)	4.7-5.2(5.0)	—
Liaoning	1.1	25.4-34.7(30)	6-14(10)	4.7-5.2(5.0)	_
Ningxia Hui	1.2	13.9–18.5 (16.2)	2-6(4)	4.7-5.2(5.0)	_
Qinghai	1.3	0-0(0)	0-2(1)	4.7-5.2(5.0)	—
Shaanxi	1.2	13.9-23.1 (18.5)	2-14(8)	4.7-5.2(5.0)	—
Shandong	1.1	23.1-27.7 (25.4)	6-12 (8)	4.7-5.2 (5.0)	—
Shanghai	1.5	32.3-34.7 (33.5)	14–18 (16)	4.7-5.2 (5.0)	—
Shanxi	1.2	13.9–20.8 (17.3)	2-6 (4)	4.7-5.2 (5.0)	—
Sichuan	1.3	13.9–25.4 (19.6)	0–18 (6)	4.7-5.2 (5.0)	—
Tianjin	1.0	30-32.3 (31.2)	6-10 (8)	4.7-5.2 (5.0)	_
Xinjiang Uyghur	1.3	0-0 (0)	0-2(1)	4.7-5.2(5.0)	—
Yunnan	1.3	23.1-32.3 (27.7)	0-18(14)	4.7-5.2 (5.0)	—
Zhejiang	1.3	30-32.3 (31.2)	10-14(12)	4.7-5.2 (5.0)	

^{*a*} Own calculations. ^{*b*} Mean, low and high annual dry mass yield of miscanthus in t_{DM} /ha/year. Data was adapted from ref. 27, 32 and 57–63. When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*c*} Mean, low and high annual dry mass yield of switchgrass in t_{DM} /ha/year. Data was adapted from ref. 43, 58, 60, 61, 63 and 64. When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*c*} Mean, low and high annual dry mass yield of short rotation coppice willow in t_{DM} /ha/year. Data was adapted from ref. 43, 58, 60, 61, 63 and 64. When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*d*} Mean, low and high annual dry mass yield of short rotation coppice willow in t_{DM} /ha/year. Data was adapted from various willow yield datasets in the literature.^{32,61,64} When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*e*} Mean, low and high annual dry mass yield of wheat in t_{DM} /ha/year. Dry mass wheat yield data was obtained from the FAO over the period 2010–2014 were used.⁴⁹ As detailed in a previous contribution,⁴ to obtain the yield of wheat straw, a grain to straw conversion factor within the range 0.6–2.0 was used.

Table 6	Regional ro	ad tortuosity an	d biomass	yield (EU	and India)
---------	-------------	------------------	-----------	-----------	------------

Sub-region sr	Road tortuosity ^{<i>a</i>} $t(sr)$	Miscanthus yield ^b	Switchgrass yield ^c	Wheat yield ^d	Willow yield ^e
Austria	1.6	17.0-22.0 (19.5)	6.0-10.0 (8.0)	4.1-5.9 (4.9)	7.8–11.0 (9.4)
Belgium	1.1	16.0-16.0(16.0)	10.0-14.0(12.0)	8.4-8.9 (8.6)	4.0–17.0 (8.9)
Bulgaria	1.9	2.0-30.0(14.3)	6.0-14.0 (8.0)	3.6-4.2(3.8)	4.0-13.0 (8.4)
Croatia	1.4	18.0 - 18.0(18.0)	6.0-10.0 (8.0)	4.0-5.3(5.0)	11.0-11.0 (11.0
Cyprus	1.8	12-27.7 (20.2)	0.0-6.0(2.0)	2.2 - 3.1(2.7)	1-11.0(6.1)
Czechia	1.3	19.0–19.0 (19.0)	6.0-10.0 (8.0)	4.3-5.7 (5.0)	13.0-13.0 (13.0
Denmark	2.5	5.0-22.0(13.3)	4.3-10.0 (7.1)	6.5 - 7.4(7.0)	8.0-8.0(8.0)
Estonia	1.3	2.0-30.0(14.3)	2.0-6.0(4.0)	2.7–3.9 (3.3)	5.0-5.0(5.0)
Finland	1.2	5.0-34.0 (17.1)	0.0-6.0 (2.0)	3.4-3.9 (3.8)	5.0-5.0 (5.0)
France	1.3	15.0-15.0 (15.0)	6.0-14.0(9.5)	6.2-7.3 (6.8)	4.0-17.0 (8.8)
Germany	1.3	2.0-30.0(14.4)	6.0-10.0(8.0)	7.0-8.0 (7.4)	9.0-9.0 (9.0)
Greece	1.3	20.0-44.0 (31.2)	0.0-6.0 (2.0)	2.7-3.2(2.8)	10.0-10.0 (10.0
Hungary	1.3	2.0-30.0(14.3)	10.0-14.0(12.0)	3.7-4.6(4.0)	8.0-8.0 (8.0)
Ireland	1.3	5.0-34.0 (14.5)	2.0-6.0(4.0)	7.2-9.0(8.4)	4.0-17.0(8.6)
Italy	1.2	15.0-32.0 (25.7)	6.0-34.0(13.6)	3.7-4.1(4.0)	3.0-3.0(3.0)
Latvia	1.4	2.0-30.0(14.3)	2.0-6.0(4.0)	3.0-4.4(3.8)	5.0-5.0(5.0)
Lithuania	1.1	2.0-30.0(14.3)	6.0-10.0(8.0)	3.3-4.8(4.1)	9.0-9.0(9.0)
Luxembourg	1.3	18.0-18.0 (18.0)	10.0-14.0(12.0)	5.5-6.4(5.9)	4.0-17.0(8.8)
Malta Notherlanda	1.1	12.0-27.7(20.2)	6.0-10.0 (8.0)	4.8-4.8(4.8)	1.0-11.0(6.1)
Netherlands Poland	1.2	15.0-15.0 (15.0)	6.0-10.7(8.3)	7.8-8.9(8.5)	4.0-17.0(8.9)
	1.6	15.0-15.0(15.0)	6.0-10.0(8.0)	3.9-4.4(4.2)	8.0-8.0(8.0)
Portugal	1.2	20.0-20.0(20.0)	6.0-10.0(8.0)	1.3-1.8(1.1)	1.0-1.0(1.0)
Romania	1.5	16.0-16.0 (16.0)	6.0-10.0(8.0)	2.7-3.7(3.0)	8.0-8.0(8.0)
Slovakia	1.5	16.0-16.0(16.0)	6.0-10.0 (8.0)	3.3-4.6(3.8)	7.0-7.0 (7.0)
Slovenia	1.3	16.0-16.0(16.0)	6.0-10.0(8.0)	4.4-5.4(5.0)	10.0-10.0(10.0)
Spain Sweden	1.2 1.2	14.0-34.0(24.0) 2.0-34.0(16.2)	2.0-6.0(4.0)	2.4-3.6(3.0) 5.4-6.2(5.8)	8.0-8.0(8.0)
United Kingdom	1.2	5.0-24.1 (12.8)	0.0-6.0 (1.0) 2.0-14.6 (8.0)	6.7-7.7 (7.2)	$\begin{array}{c} 4.0 - 4.0 \ (4.0) \\ 4.0 - 17.0 \ (8.8) \end{array}$
Andaman and Nicobar	1.4	32.3-34.7 (33.5)	12.0-18.0 (14.0)	2.8-3.2 (3.1)	_
Andhra Pradesh	1.1	5.0-34.7 (24.0)	6.0-14.0 (10.0)	2.8 - 3.2(3.1)	
Arunachal Prades	1.8	0.0-0.0 (0.0)	0.0-6.0 (2.0)	2.8-3.2 (3.1)	_
Assam	1.9	12.0-22.8 (17.2)	6.0-14.0 (12.0)	2.8 - 3.2(3.1)	
Bihar	1.4	12.0-22.8 (17.2)	6.0-10.0 (8.0)	2.8 - 3.2(3.1)	_
Chandigarh	1.3	12.0-22.8(17.2)	10.0-14.0(12.0)	2.8 - 3.2(3.1)	_
Chhattisgarh	1.4	12.0–22.8 (17.2)	6.0-10.0 (8.0)	2.8-3.2 (3.1)	_
Dadra and Nagar Hav.	1.4	5.0-34.0 (14.5)	6.0-10.0 (8.0)	2.8-3.2 (3.1)	_
Daman and Diu	1.2	5.0-34.0 (14.5)	6.0-10.0 (8.0)	2.8-3.2 (3.1)	_
Delhi	1.2	5.0-34.0 (14.5)	6.0-10.0 (8.0)	2.8-3.2 (3.1)	_
Goa	1.4	32.3-34.7 (33.5)	6.0-10.0 (8.0)	2.8-3.2 (3.1)	_
Gujarat	1.4	0.0-34.0 (7.3)	6.0-10.0 (8.0)	2.8-3.2 (3.1)	_
Haryana	1.3	5.0-34.0 (15.9)	2.0-10.0(6.0)	2.8 - 3.2(3.1)	—
Himachal Pradesh	1.4	0.0-22.8 (8.6)	2.0-6.0 (4.0)	2.8 - 3.2(3.1)	—
Jammu and Kashmir	1.4	0.0-0.0(0.0)	0.0-2.0(1.0)	2.8 - 3.2(3.1)	—
Jharkhand	1.2	12.0-22.8 (17.2)	6.0-10.0(8.0)	2.8 - 3.2(3.1)	—
Karnataka	1.4	5.0-41.0(19.5)	6.0-14.0(9.0)	2.8 - 3.2(3.1)	_
Kerala	1.4	32.3-34.7 (33.5)	10.0-14.0(12.0)	2.8 - 3.2(3.1)	—
Madhya Pradesh	1.2	5.0-34.0(15.4)	6.0-14.6(10.4)	2.8 - 3.2(3.1)	_
Maharashtra	1.7	32.3-34.7 (33.5)	6.0-10.0 (8.0)	2.8 - 3.2(3.1)	_
Manipur	2.4	12.0–22.8 (17.2)	6.0-14.0(10.0)	2.8 - 3.2(3.1)	_
Meghalaya	2.3	12.0-22.8(17.2)	6.0-14.0(10.0)	2.8 - 3.2(3.1)	—
Mizoram	3.3	12.0–22.8 (17.2)	6.0-14.0(10.0)	2.8-3.2(3.1)	—
Nagaland	1.9	12.0–22.8 (17.2)	6.0-14.0(10.0)	2.8-3.2 (3.1)	—
Odisha	1.5	32.3-34.7 (33.5)	6.0-10.0 (8.0)	2.8-3.2 (3.1)	—
Puducherry	1.3	32.3-34.7 (33.5)	6.0-14.0 (10.0)	2.8-3.2 (3.1)	—
Punjab	1.3	5.0-34.0 (14.5)	2.0-6.0 (4.0)	2.8-3.2 (3.1)	—
Rajasthan	1.3	0.0-0.0 (0.0)	6.0-10.0 (8.0)	2.8-3.2 (3.1)	—
Sikkim	1.3	5.0-34.0 (14.5)	10.0-14.0 (12.0)	2.8-3.2 (3.1)	—
Tamil Nadu	1.1	5.0-34.0 (14.5)	10.0–14.0 (12.0)	2.8-3.2 (3.1)	—
Tripura	4.0	12.0-22.8 (17.2)	6.0-14.0 (10.0)	2.8-3.2 (3.1)	—
Uttar Pradesh	1.2	12.0-22.8 (17.2)	6.0-10.0 (8.0)	2.8-3.2 (3.1)	—
Uttarakhand	1.3	12.0-22.8(17.2)	2.0-10.0(6.0)	2.8-3.2(3.1)	—
West Bengal	1.4	32.3-34.7 (33.5)	6.0-10.0(8.0)	2.8 - 3.2(3.1)	_

^{*a*} Own calculations. ^{*b*} Mean, low and high annual dry mass yield of miscanthus in t_{DM} /ha/year. Data was adapted from ref. 27, 32 and 57–63. When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*c*} Mean, low and high annual dry mass yield of switchgrass in t_{DM} /ha/year. Data was adapted from ref. 43, 58, 60, 61, 63 and 64. When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*d*} Mean, low and high annual dry mass yield of short rotation coppice willow in t_{DM} /ha/year. Data was adapted from various willow yield data for region sr is not available, yield data from various willow yield datasets in the literature. ^{32,61,64} When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*e*} Mean, low and high annual dry mass wheat yield data was obtained from the FAO over the period 2010–2014 were used. ⁴⁹ As detailed in a previous contribution, ⁴ to obtain the yield of wheat straw, a grain to straw conversion factor within the range 0.6–2.0 was used.

Table 7	Regional	road	tortuosity	and	hiomass	vield	(US)
Table /	Regional	roau	tortuosity	anu	010111033	yielu	(03)

Sub-region sr	Road tortuosity ^{<i>a</i>} $t(sr)$	Miscanthus yield ^b	Switchgrass yield ^c	Wheat yield ^d	Willow yield ⁴
Alabama	1.3	27.7-27.7 (27.7)	14.0-18.0 (16.0)	2.9-3.2 (3.1)	5.6-5.6 (5.6)
Alaska	1.3	5.0-5.0(5.0)	0.0-2.0(1.0)	2.9-3.2(3.1)	0.0-0.0(0.0)
Arizona	1.2	2.4-2.4(2.4)	2.0-6.0 (4.0)	2.9-3.2 (3.1)	0.0-0.0 (0.0)
Arkansas	1.2	12.0-22.8 (17.2)	10.0-14.0 (12.0)	2.9-3.2 (3.1)	5.9-5.9 (5.9)
California	1.2	28.1-28.1 (28.1)	0.0-6.0 (2.0)	2.9-3.2 (3.1)	0.0-0.0 (0.0)
Colorado	1.2	2.4-2.4(2.4)	0.0–9.9 (5.8)	2.9-3.2 (3.1)	7.5-7.5 (7.5)
Connecticut	1.2	15.5-15.5 (15.5)	6.0-10.0(7.7)	2.9-3.2 (3.1)	5.6-11.0 (7.9
Delaware	1.3	12.0-22.8 (17.2)	9.4-18.0 (14.4)	2.9-3.2 (3.1)	5.6-5.6 (5.6)
Florida	1.2	12.0-22.8 (17.2)	10.0-14.0 (11.9)	2.9-3.2 (3.1)	5.5-5.5 (5.5)
Georgia	1.3	26.0–41.0 (31.9)	11.8–18.0 (14.9)	2.9-3.2 (3.1)	6.2-6.2 (6.2)
Hawaii	1.2	27.7–27.7 (27.7)	0.0-0.0 (0.0)	2.9-3.2 (3.1)	0.0-0.0 (0.0)
Idaho	1.2	2.4-2.4 (2.4)	0.0-6.0 (2.0)	2.9-3.2 (3.1)	0.0-0.0 (0.0)
Illinois	1.3	16.9-22.8 (19.9)	10.0-18.0 (13.4)	2.9-3.2(3.1)	6.2-6.2(6.2)
Indiana	1.3	16.9-22.8 (19.9)	10.0–14.0 (12.0)	2.9-3.2 (3.1)	6.2-6.2 (6.2)
Iowa	1.2	22.8-22.8 (22.8)	7.4-18.0 (13.0)	2.9-3.2 (3.1)	5.6-5.6 (5.6)
Kansas	1.1	18.3-18.3 (18.3)	6.0–18.0 (12.1)	2.9-3.2 (3.1)	6.1-6.1 (6.1)
Kentucky	1.2	27.7-27.7 (27.7)	6.0-14.0(10.2)	2.9-3.2 (3.1)	5.9-5.9 (5.9)
Louisiana	1.1	28.1-28.1 (28.1)	10.0-18.0(14.0)	2.9-3.2 (3.1)	5.1 - 5.1(5.1)
Maine	1.2	15.5–15.5 (15.5)	6.0-10.0 (8.1)	2.9-3.2 (3.1)	5.5-5.5 (5.5)
Maryland	1.4	12.0-27.7 (20.2)	9.9–14.0 (11.5)	2.9-3.2 (3.1)	6.7-6.7 (6.7)
Massachusetts	1.1	15.5-15.5 (15.5)	10.0-14.0 (11.5)	2.9-3.2 (3.1)	6.2–11.0 (8.1
Michigan	1.3	16.9-22.8 (19.9)	10.0-14.0 (11.7)	2.9 - 3.2 (3.1)	5.9-5.9 (5.9)
Minnesota	1.2	16.9–16.9 (16.9)	10.0-16.0 (12.8)	2.9 - 3.2 (3.1)	6.0-11.0 (8.0)
Mississippi	1.2	27.7-28.1 (27.9)	10.0-18.0 (13.5)	2.9 - 3.2 (3.1) 2.9 - 3.2 (3.1)	5.9-5.9 (5.9)
Missouri	1.2	12.0-22.8 (17.2)	10.7–18.0 (14.7)	2.9 - 3.2 (3.1) 2.9 - 3.2 (3.1)	5.6-5.6 (5.6)
Montana	1.2	2.4-2.4(2.4)	0.0-6.0 (4.0)	2.9 - 3.2 (3.1)	0.0-0.0 (0.0)
Nebraska	1.1	12.0–12.0 (12.0)	6.0-14.0 (10.0)	2.9-3.2 (3.1)	6.6-6.6 (6.6)
Nevada	1.3	2.4-2.4(2.4)	0.0-2.0 (1.0)	2.9 - 3.2 (3.1)	0.0-0.0 (0.0)
New Hampshire	1.3	15.5-15.5 (15.5)	6.0-10.7 (8.7)	2.9 - 3.2 (3.1)	5.9-11.0 (8.0)
New Jersey	1.2	15.5-15.5 (15.5)	9.9–14.0 (11.5)	2.9 - 3.2 (3.1) 2.9 - 3.2 (3.1)	7.5-7.5 (7.5)
New Mexico	1.1	2.4-2.4 (2.4)	2.0-6.0 (4.0)	2.9 - 3.2 (3.1) 2.9 - 3.2 (3.1)	0.0-0.0 (0.0)
New York	1.0	15.5-16.9 (16.2)	10.0-14.0 (11.5)	2.9 - 3.2 (3.1) 2.9 - 3.2 (3.1)	5.4-11.0 (7.8)
North Carolina	1.2	19.3-27.7 (22.6)	8.7–18.0 (14.2)	$2.9 \ 3.2 \ (3.1)$ $2.9 \ -3.2 \ (3.1)$	4.6-4.6 (4.6)
North Dakota	1.1	12.0-12.0 (12.0)	6.0-14.0 (10.4)	2.9-3.2 (3.1)	6.0-6.0 (6.0)
Ohio	1.4	16.9-22.8 (19.9)	10.0-14.0 (11.7)	$2.9 \ 3.2 \ (3.1)$ $2.9 \ -3.2 \ (3.1)$	5.3-5.3(5.3)
Oklahoma	1.1	18.3–18.3 (18.3)	10.0-14.0 (12.0)	2.9 - 3.2 (3.1) 2.9 - 3.2 (3.1)	7.5-7.5 (7.5)
Oregon	1.6	12.0-27.7 (20.2)	0.0-11.1(4.8)	2.9 - 3.2 (3.1) 2.9 - 3.2 (3.1)	5.8-5.8 (5.8)
Pennsylvania	1.2	15.5-16.9 (16.2)	6.0-14.0(10.0)	$2.9 \ 3.2 \ (3.1)$ $2.9 \ -3.2 \ (3.1)$	7.4-7.4 (7.4)
Rhode Island	1.2	15.5 - 15.5 (15.2) 15.5 - 15.5 (15.5)	10.0-14.0(11.6)	$2.9 \ 3.2 \ (3.1)$ $2.9 \ -3.2 \ (3.1)$	5.4-11.0 (7.8)
South Carolina	1.2	27.7-27.7 (27.7)	10.1–18.0 (14.5)	2.9-3.2(3.1) 2.9-3.2(3.1)	5.3-5.3 (5.3)
South Dakota	1.1	12.0-12.0(12.0)	6.0-14.0 (10.6)	2.9-3.2(3.1) 2.9-3.2(3.1)	6.0-6.0 (6.0)
Tennessee	1.1 1.2			2.9-3.2(3.1) 2.9-3.2(3.1)	
	1.2	27.7-27.7 (27.7)	10.0-14.0(11.6)		5.0-5.0(5.0)
Texas		18.3-18.3(18.3)	4.0-14.0(9.2)	2.9-3.2(3.1)	6.2-6.2 (6.2)
Utah	1.2	2.4-2.4(2.4)	0.0-2.0(1.0)	2.9-3.2(3.1)	1.0-11.0 (6.3)
Vermont	1.3	15.5-15.5 (15.5)	6.0-11.1(8.8)	2.9-3.2(3.1)	5.4-11.0 (7.8)
Virginia Washington	1.2	27.7-27.7(27.7)	14.0-18.0(16.0)	2.9-3.2(3.1)	7.3-7.3 (7.3)
Washington	1.2	5.0-34.0 (17.3)	0.0-12.3(5.1)	2.9-3.2(3.1)	5.2-5.2(5.2)
West Virginia	1.4	27.7-27.7 (27.7)	6.0-10.1(8.5)	2.9-3.2(3.1)	6.1-6.1 (6.1)
Wisconsin	1.2	12.0-27.7(20.2)	8.0-16.0 (12.0)	2.9-3.2(3.1)	5.2-11.0 (5.8)
Wyoming	1.2	5.0-34.0(17.3)	0.0-6.0(2.0)	2.9-3.2(3.1)	5.4-11.0 (6.5)

^{*a*} Own calculations. ^{*b*} Mean, low and high annual dry mass yield of miscanthus in t_{DM} /ha/year. Data was adapted from ref. 27, 32 and 57–63. When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*c*} Mean, low and high annual dry mass yield of switchgrass in t_{DM} /ha/year. Data was adapted from ref. 43, 58, 60, 61, 63 and 64. When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*d*} Mean, low and high annual dry mass yield of short rotation coppice willow in t_{DM} /ha/year. Data was adapted from various willow yield data for region sr is not available, yield data from various willow yield datasets in the literature. ^{32,61,64} When yield data for region sr is not available, yield data from regions with the closest climate are used. ^{*e*} Mean, low and high annual dry mass wheat yield data was obtained from the FAO over the period 2010–2014 were used.⁴⁹ As detailed in a previous contribution, ⁴ to obtain the yield of wheat straw, a grain to straw conversion factor within the range 0.6–2.0 was used.

Acknowledgements

The authors thank Imperial College London for the funding of a President's PhD Scholarship, as well as the Greenhouse Gas Removal (GGR) grant, funded by the Natural Environment Research Council (NERC), under grant NE/P019900/1. The authors also acknowledge the reviewers who provided a very thorough review and insightful comments.

References

- 1 EASAC, Negative emission technologies: What role in meeting Paris Agreement targets?, 2018, available at https://easac.eu/ publications/details/easac-net/.
- 2 UNEP, *The Emissions Gap Report*, 2017, available at https:// wedocs.unep.org/bitstream/handle/20.500.11822/22070/EGR_ 2017.pdf.

- 3 M. Fajardy and N. Mac Dowell, *Energy Environ. Sci.*, 2018, **11**, 1581–1594.
- 4 M. Fajardy and N. Mac Dowell, *Energy Environ. Sci.*, 2017, **10**, 1389–1426.
- 5 V. Heck, D. Gerten, W. Lucht and A. Popp, *Nat. Clim. Change*, 2018, **8**, 151–155.
- 6 L. Boysen, W. Lucht, H. Schellnhuber, D. Gerten, V. Heck and T. Lenton, *Earth's Future*, 2017, 5, 463–474.
- 7 N. Vaughan and C. Gough, Environ. Res. Lett., 2016, 11, 095003.
- 8 P. Smith, S. J. Davis, F. Creutzig, S. Fuss, J. Minx, B. Gabrielle, E. Kato, R. B. Jackson, A. Cowie, E. Kriegler, D. P. van Vuuren, J. Rogelj, P. Ciais, J. Milne, J. G. Canadell, D. McCollum, G. Peters, R. Andrew, V. Krey, G. Shrestha, P. Friedlingstein, T. Gasser, A. Grubler, W. K. Heidug, M. Jonas, C. D. Jones, F. Kraxner, E. Littleton, J. Lowe, J. R. Moreira, N. Nakicenovic, M. Obersteiner, A. Patwardhan, M. Rogner, E. Rubin, A. Sharifi, A. Torvanger, Y. Yamagata, J. Edmonds and C. Yongsung, *Nat. Clim. Change*, 2016, 6, 42–50.
- 9 W. Steffen, K. Richardson, J. Rockström, S. E. Cornell, I. Fetzer, E. M. Bennett, R. Biggs, S. R. Carpenter, W. De Vries, C. A. De Wit, C. Folke, D. Gerten, J. Heinke, G. M. Mace, L. M. Persson, V. Ramanathan, B. Reyers and S. Sörlin, *Science*, 2015, 347, 1259855.
- 10 S. Fuss, J. G. Canadell, G. P. Peters, M. Tavoni, R. M. Andrew, P. Ciais, R. B. Jackson, C. D. Jones, F. Kraxner, N. Nakicenovic, C. Le Quéré, M. R. Raupach, A. Sharifi, P. Smith and Y. Yamagata, *Nat. Clim. Change*, 2014, 4, 850–853.
- 11 C. Azar, K. Lindgren, M. Obersteiner, K. Riahi, D. P. van Vuuren, K. M. J. den Elzen, K. Möllersten and E. D. Larson, *Clim. Change*, 2010, **100**, 195–202.
- 12 I. S. Tagomori, F. M. Carvalho, F. da Silva, P. R. Paulo, P. R. Rochedo, A. Szklo and R. Schaeffer, *Int. J. Greenhouse Gas Control*, 2018, 68, 112–127.
- 13 O. Akgul, N. Mac Dowell, L. G. Papageorgiou and N. Shah, Int. J. Greenhouse Gas Control, 2014, 28, 189–202.
- 14 F. Kraxner, K. Aoki, S. Leduc, G. Kindermann, S. Fuss, J. Yang, Y. Yamagata, K. I. Tak and M. Obersteiner, *Renew-able Energy*, 2014, **61**, 102–108.
- 15 S. Selosse and O. Ricci, Energy, 2014, 76, 967-975.
- 16 E. Baik, D. L. Sanchez, P. A. Turner, K. J. Mach, C. B. Field and S. M. Benson, *Proc. Natl. Acad. Sci. U. S. A.*, 2018, 201720338.
- 17 N. Johnson, N. Parker and J. Ogden, *Energy Procedia*, 2014, 63, 6770–6791.
- 18 T. Searchinger, R. Heimlich, R. A. Houghton, F. Dong, A. Elobeid, J. Fabiosa, S. Tokgoz, D. Hayes and T. Yu, *Science*, 2008, 423, 1238–1241.
- 19 R. J. Plevin, M. O'hare, A. D. Jones, M. S. Torn and H. K. Gibbs, *Environ. Sci. Technol.*, 2010, 44, 8015–8021.
- 20 S. A. Edrisi and P. C. Abhilash, *Renewable Sustainable Energy Rev.*, 2016, 54, 1537–1551.
- 21 X. Cai, X. Zhang and D. Wang, *Environ. Sci. Technol.*, 2011, 45, 334–339.
- 22 S. Fritz, L. See, M. Van Der Velde, R. Nalepa, C. Perger, C. Schill, I. McCallum, D. Schepaschenko, F. Kraxner,

X. Cai, X. Zhang, S. Ortner, R. Hazarika, A. Cipriani, C. Di Bella, A. H. Rabia, A. Garcia, M. Vakolyuk, K. Singha, M. Beget, S. Erasmi, F. Albrecht, B. Shaw and M. Obersteiner, *Environ. Sci. Technol.*, 2013, 47, 1688–1694.

- 23 S. Lossau, G. Fischer, S. Tramberend, H. V. Velthuizen,
 B. Kleinschmit and R. Schom, *Biomass Bioenergy*, 2015, 81, 452–461.
- 24 The International Institute for Applied Systems Analysis (IIASA) and the Food and Agriculture Organisation (FAO), *GAEZ v3.0 Global Agro-ecological Zones*, 2012, available at http://www.gaez.iiasa.ac.at/.
- 25 S. Li and C. Chan-Halbrendt, *Appl. Energy*, 2009, **86**, S162–S169.
- 26 D. Zhuang, D. Jiang, L. Liu and Y. Huang, *Renewable Sustainable Energy Rev.*, 2011, **15**, 1050–1056.
- 27 S. Xue, I. Lewandowski, X. Wang and Z. Yi, *Renewable Sustainable Energy Rev.*, 2016, 54, 932–943.
- 28 A. Strapasson, J. Woods and K. Mbuk, *Land use futures in Europe*, 2016, available at https://www.imperial.ac.uk/media/imperialcollege/grantham-institute/public/publications/briefing-papers/ Land-Use-Futures-in-Europe-web-version-v3.pdf.
- 29 D. J. Muth and K. M. Bryden, *Environ. Modell. Softw.*, 2013, 39, 50–69.
- 30 W. Wilhelm, J. Johnson, J. Hatfield, W. Voorhees and D. Linden, *Agron. J.*, 2004, **96**, 1–17.
- 31 A. A. Lovett, G. M. Sünnenberg, G. M. Richter, A. G. Dailey,
 A. B. Riche and A. Karp, *BioEnergy Res.*, 2009, 2, 17–28.
- 32 A. W. Bauen, A. J. Dunnett, G. M. Richter, A. G. Dailey, M. Aylott and E. Casella, *Bioresour. Technol.*, 2010, **101**, 8132–8143.
- 33 N. J. Glithero, P. Wilson and S. J. Ramsden, *Appl. Energy*, 2015, 147, 82–91.
- 34 Committee on Climate Change, *UK climate change following the Paris Agreement*, 2016, available at https://www.theccc.org.uk/wp-content/uploads/2016/10/UK-climate-action-following-the-Paris-Agreement-Committee-on-Climate-Change-October-2016.pdf.
- 35 Committee on Climate Change, *Communication*, available at https://www.theccc.org.uk/2018/04/18/lord-deben-welcomes-news-that-government-will-seek-ccc-advice-on-uks-long-term-emissions-targets/.
- 36 DRAX GROUP plc, Drax annual report and accounts: A reliable, renewable future, today the way in the generation, 2015, http://aspgb.secure-zone.net/v2/index.jsp?id=666/3685/10863&lng=en.
- 37 Energy Technologies Institute, A Picture of CO₂ Storage in the UK: Learnings from the ETI's UKSAP and derived projects, 2013, available at https://s3-eu-west-1.amazonaws.com/assets.eti. co.uk/legacyUploads/2014/03/A_Picture_of_Carbon_Dioxide_ Storage_in_the_UKUPDATED1.pdf.
- 38 Z. Qin, J. B. Dunn, H. Kwon, S. Mueller and M. M. Wander, GCB Bioenergy, 2016, 8, 66–80.
- 39 F. Cherubini, G. P. Peters, T. Berntsen, A. H. Strømman and E. Hertwich, GCB Bioenergy, 2011, 3, 413–426.
- 40 Environmental Systems Research Institute, *ArcGIS Release* 10.5.1, 2012, available at http://desktop.arcgis.com/en/arcmap/.
- 41 FAO, CROPWAT8.0, available at http://www.fao.org/nr/water/ infores_databases_cropwat.html.

- 43 S. Kang, S. S. Nair, K. L. Kline, J. A. Nichols, D. Wang, W. M. Post, C. C. Brandt, S. D. Wullschleger, N. Singh and Y. Wei, *GCB Bioenergy*, 2014, 6, 14–25.
- 44 M. Kottek, J. Grieser, C. Beck, B. Rudolf and F. Rubel, *Meteorol. Z.*, 2006, **15**, 259–263.
- 45 S. Channan, K. Collins and W. R. Emmanuel, *Global mosaics of the standard MODIS land cover type data*, 2014, available at http://glcf.umd.edu/data/lc/.
- 46 L. You, U. Wood-Sichra, S. Fritz, Z. Guo, L. See and J. Koo, Spatial Production Allocation Model (SPAM) 2005 v3.2, 2017, available at http://mapspam.info.
- 47 A. Welfle, Biomass Bioenergy, 2017, 105, 83-95.
- 48 C. M. Beal, I. Archibald, M. E. Huntley, C. H. Greene and Z. I. Johnson, *Earth's Future*, 2018, **6**, 524–542.
- 49 FAOSTAT, http://www.fao.org/faostat/en/#home, accessed 2017.
- 50 G. G. T. Camargo, M. R. Ryan and T. L. Richard, *BioScience*, 2013, **63**, 263–273.
- 51 M. Bui, M. Fajardy and N. Mac Dowell, *Appl. Energy*, 2017, **195**, 289–302.
- 52 N. Mac Dowell and M. Fajardy, *Environ. Res. Lett.*, 2017, 12, 045004.
- 53 K. Anderson and G. Peters, Science, 2016, 354, 182-183.
- 54 J. Rogelj, A. Popp, K. V. Calvin, G. Luderer, J. Emmerling, D. Gernaat, S. Fujimori, J. Strefler, T. Hasegawa, G. Marangoni, V. Krey, E. Kriegler, K. Riahi, D. P. van Vuuren, J. Doelman, L. Drouet, J. Edmonds, O. Fricko, M. Harmsen, P. Havlík, F. Humpenöder, E. Stehfest and M. Tavoni, *Nat. Clim. Change*, 2018, **8**, 1–8.
- 55 N. Bauer, K. Calvin, J. Emmerling, O. Fricko, S. Fujimori, J. Hilaire, J. Eom, V. Krey, E. Kriegler, I. Mouratiadou, H. Sytze de Boer, M. van den Berg, S. Carrara, V. Daioglou,

L. Drouet, J. E. Edmonds, D. Gernaat, P. Havlik, N. Johnson, D. Klein, P. Kyle, G. Marangoni, T. Masui, R. C. Pietzcker, M. Strubegger, M. Wise, K. Riahi and D. P. van Vuuren, *Global Environmental Change*, 2017, **42**, 316–330.

- 56 T. Skevas, S. M. Swinton and N. Hayden, *Biomass Bioenergy*, 2014, **67**, 252–259.
- 57 M. A. Mehmood, M. Ibrahim, U. Rashid, M. Nawaz, S. Ali, A. Hussain and M. Gull, *Sustainable Production and Con*sumption, 2016, 1–19.
- 58 M. Wu and Y.-W. Chiu, Developing Country-Level Water Footprints of Biofuel Produced from Switchgrass and Miscanthus in the US, 2014, available at https://greet.es.anl.gov/publicationcountry-level-water-footprint.
- 59 A. Hastings, M. J. Tallis, E. Casella, R. W. Matthews, P. A. Henshall, S. Milner, P. Smith and G. Taylor, *GCB Bioenergy*, 2014, 6, 108–122.
- 60 B. Gabrielle, L. Bamière, N. Caldes, S. De Cara, G. Decocq,
 F. Ferchaud, C. Loyce, E. Pelzer, Y. Perez, J. Wohlfahrt and
 G. Richard, *Renewable Sustainable Energy Rev.*, 2014, 33, 11–25.
- 61 A. Don, B. Osborne, A. Hastings, U. Skiba, M. S. Carter, J. Drewer, H. Flessa, A. Freibauer, N. Hyvönen, M. B. Jones, G. J. Lanigan, Ü. Mander, A. Monti, S. N. Djomo, J. Valentine, K. Walter, W. Zegada-Lizarazu and T. Zenone, *GCB Bioenergy*, 2012, 4, 372–391.
- 62 L. Price, M. Bullard, H. Lyons, S. Anthony and P. Nixon, *Biomass Bioenergy*, 2004, 26, 3–13.
- 63 E. A. Heaton, J. Clifton-Brown, T. B. Voigt, M. B. Jones and S. P. Long, *Mitig. Adapt. Strateg. Glob. Change*, 2004, 9, 433–451.
- 64 R. L. Graham, L. J. Allison and D. A. Becker, ORECCL Summary of a National database on energy crop land base, yields, and costs, 1997, available at https://www.osti.gov/ servlets/purl/501534.