

Cite this: *RSC Sustainability*, 2024, 2, 3202

Sustainability of hydrogen manufacturing: a review

Satish Vitta †

Hydrogen is a highly versatile energy vector, and most importantly, its oxidation, which releases energy, is a green process with no associated emissions. Hence, it is considered a green alternative that can supply energy and simultaneously reduce global warming. This gas, however, does not occur naturally in sufficient quantities and needs to be synthesized using different resources. The two most feasible methods for producing H₂ are steam methane reforming and water splitting *via* electrolysis. Therefore, these two processes were reviewed first, and subsequently, a complete sustainability analysis was performed using currently available data. It has been found that input raw materials such as methane and water will be required in 'gigatonne' quantity every year. Although availability of water does not pose supply risk, methane production falls far short of the requirement and becomes a supply risk. The conversion of these into H₂ requires energy and results in the production of 'Gt' of CO₂. For example, the production of 1 Gt of H₂ using the steam methane reforming process requires ~3.6 EJ of energy and releases ~10 Gt of CO₂. In contrast, water splitting electrolysis requires ~198 EJ of energy and releases anywhere from 102 Gt to 220 Gt of CO₂, depending on the electricity generation mix. Additionally, they have ecological impacts in the form of acidification, marine toxicity, particulate emissions and so on, which affect all life forms on the earth. This analysis clearly shows that complete transitioning to H₂-based energy supply is unsustainable and only a fraction of the energy needs can be supplemented.

Received 28th July 2024
Accepted 5th September 2024

DOI: 10.1039/d4su00420e

rsc.li/rscsus

Sustainability spotlight

Hydrogen is a highly versatile energy vector, and its combustion to release energy produces water without any associated emissions. Hence, there has been a strong push to transition to hydrogen as the sole energy carrier which has the potential to limit/arrest the global warming phenomenon. This has essentially resulted in the term 'hydrogen economy', which is being discussed around the world. In this context and current scenario, it has become highly relevant and timely to assess the environmental and ecological sustainability of transitioning to this energy source. This review has therefore been undertaken to assess the sustainability of large-scale hydrogen production, which will be essential for energy transition.

1. Introduction

1.1. Brief history

Hydrogen is the most abundant element on the earth and in the universe as far as current knowledge goes. On the earth, it is present mainly in a combined form with other elements, mostly oxygen and carbon. In the universe, it is present as a fuel that sustains and powers stars such as the sun. The presence of hydrogen on the earth was discovered way back in the 15th century, but it was only in the 18th century that it was called 'hydrogen', meaning 'water former', by the French chemist Antoine Lavoisier.¹ All the elements in the periodic table originate from hydrogen, the building block. It is the starting element in the periodic table with just 1 electron and 1 proton and is commonly perceived to exist only as a gas. Yet, this gas has gained considerable interest lately across the world, and

there are worldwide discussions regarding an economy that is powered solely by this element, a 'hydrogen economy'.^{2–13} Therefore, the question arises—is this all only 'empty talk' or is there a solid substance behind these discussions. Before addressing this question, it is important to understand some basic aspects of this element hydrogen (H₂).

Hydrogen is the smallest and lightest element known, which is highly unstable in monoatomic form and hence exists in the diatomic form, H₂, as a molecule. In the presence of elements such as oxygen and carbon, the monoatomic form is unstable and combines to form compounds such as water and hydrocarbons, and hence, it has been predicted to be not commonly occurring even in molecular form. This notion, however, has been recently challenged after the discovery of several naturally occurring sources/deposits as well as constantly forming sources.^{14,15} The exact amount of naturally occurring H₂ is not clearly known as it is being actively explored, and the current estimates for the flux of gas that emanates from the geological formations vary from 0.1–10 Mt per year.^{14,16–18} Furthermore, H₂ can and is produced from various sources – gas, liquid and solid, and it is

Indian Institute of Technology Bombay, Mumbai 400076, India. E-mail: satish.vitta@iitb.ac.in


† Retired Professor.



used extensively in applications varying from fertilizers for agriculture to fuels for space shuttle. The growth in the consumption of H₂ since 1975 for various applications is shown in Fig. 1. It can be seen that the use of H₂ for methanol production, an alternate fuel, has been steadily increasing including for other applications. The amount of H₂ produced from natural resources such as natural gas or biomass or coal for these applications has reached about 120 Mt in the year 2022 and is growing.

1.2. Colors of H₂

Before we proceed to discuss the various aspects of H₂, it is important to understand the different variants of H₂ and their environmental connection. Since H₂ can be produced from various sources, both non-renewable and renewable and the source of energy for this production can again be non-renewable or renewable, distinction has been made by attributing different colors.^{19–22} It should be noted that the color coding of H₂ is not unique and there is no universal agreement for the color codes. This has been done primarily to distinguish the different ways of production. The different colors and attributes are shown schematically in Fig. 2. First, the naturally occurring H₂ gas, its color coded 'Gold' as it is pristine, does not require any special processing, which results in environmental emissions. Another source of H₂ which does not result in any emissions is the process of 'serpentinization', wherein water coming into contact with ferrous salts of Fe, FeO, leads to H₂ release according to the following reaction:



This reaction requires suitable temperature and pressure and has been known to occur in sub-surface terrains with Fe-containing rocks, typically magnesium silicates. This H₂ is color coded as being 'White' and has been found in many

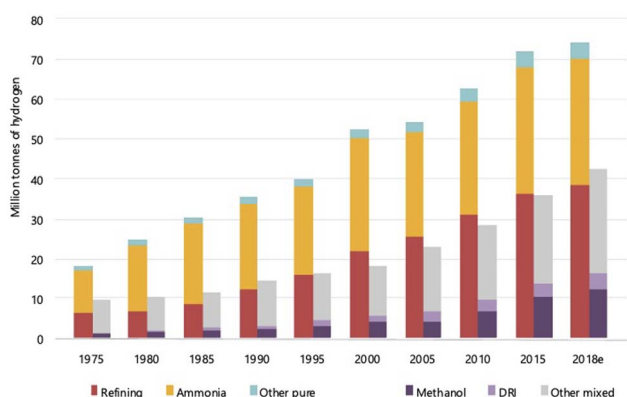


Fig. 1 World consumption of H₂ for different applications, ranging from ammonia manufacturing to direct reduction of iron ores (DRI). Refining is for petrochemicals, while methanol is an alternate fuel made using H₂.⁶ The world consumption has increased steadily from ~30 Mt in 1975 to 120 Mt in 2018 with refining and ammonia production being the major users.

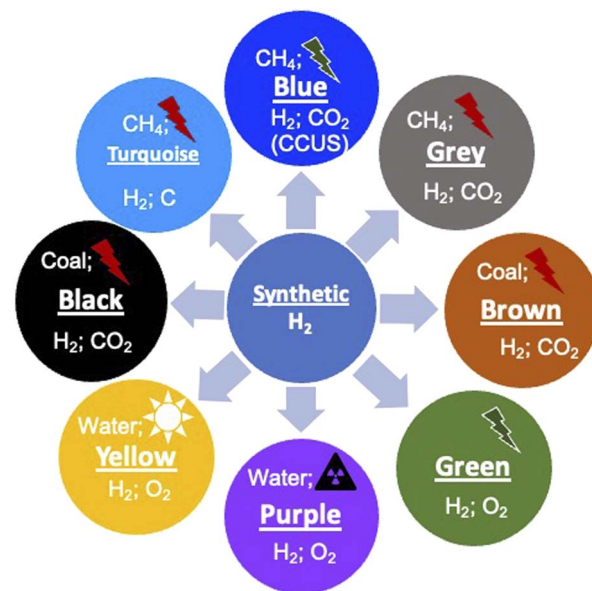


Fig. 2 H₂ can be produced from a wide variety of natural resources – non-renewable such as natural gas and coal and renewable such as water. Depending on the method of production and CO₂(e) emission potential, it has been attributed different colors, which are shown here along with the method of production. Naturally occurring H₂ can also be of different origins, and depending on this, it has also been color coded. The exact definition of each of these variants is given in the text.

locations across the earth. Since this is a naturally occurring reaction, the H₂ content is generally low and is normally mixed with natural gas, CH₄. If this process can be externally stimulated by pro-actively pursuing such rock formations, water hydrolysis can be performed naturally and this form of H₂ is referred to as 'Orange'. This method of production is being pursued and developed actively across the world and has the potential to become a major renewable source. Currently, H₂ is produced on an industrial scale using naturally occurring methane gas as the source, and this process is generally termed the reforming process. Since this process results in the emission of 1 mole of CO₂ for 2 moles of H₂ produced, it is referred to as 'Grey' H₂. However, if this CO₂ is completely captured and sequestered or utilized (CCUS), the resulting H₂ is referred to as 'Blue'. A nearly emission-free process of producing H₂ will be using renewable energy resources such as sun, wind and hydroelectricity to reform methane and subsequently sequester the emitted CO₂. Currently, significant efforts are being made to scale up this process for large-scale production. If H₂ is produced from coal using gasification as the process, it is colored either 'Brown' or 'Black' depending on whether the coal is lignitic or non-lignitic in nature, respectively. H₂ can also be produced by the pyrolysis of natural gas without emitting CO₂ but producing solid C and this is color coded 'Turquoise'. The sources of H₂ in the above-mentioned schemes are naturally occurring fossil fuels. Another nearly infinite source however is water (H₂O), which can be split into its constituents. If the source of energy for this splitting is nuclear, the resulting H₂ is referred to as 'Purple/Pink'. Another most often discussed


hydrogen production route is the splitting of water using completely renewable electricity generation schemes such as solar, wind or hydroelectric. This form is color coded 'Green' as it has emissions essentially due to the installation and operation of different electricity generation schemes. These color schemes indeed show the multiplicity of producing H_2 and a variety of processes feasible to produce the gas. All the different forms have varying degrees of greenhouse gas emissions at different stages of production (Table 2), clearly showing that completely emission-free hydrogen is not possible. If one were to transition to H_2 and a H_2 economy, these production processes need to be significantly scaled up. The flip side however is that the environmental footprint of these technologies should be significantly reduced or even eliminated completely. This makes it imperative to understand these processes and evaluate their environmental impact and long-term sustainability. The different large-scale production processes that are known currently, which have the potential to be scaled-up, are discussed below.

1.3. Hydrogen – gas, liquid or solid

H_2 as we know exists in a gaseous form under normal temperature and pressure conditions. Since this is the lightest element known with a density of 0.08 kg N m^{-3} under normal conditions, it becomes extremely 'voluminous' to handle large quantities required for large-scale utilization in a hydrogen economy scenario. Hence, it becomes important to understand the conditions under which it can exist in a higher density form than the gaseous state, such as a liquid or a solid.^{23,24} The pressure and temperature dependence of existence of the different forms – gas, liquid or solid, is shown in Fig. 3, the phase stability diagram.

If the gas is cooled at an atmospheric pressure of 10^5 Pa (1 atm), it condenses into a liquid at $\sim 20 \text{ K}$ (-253°C), and if cooled

further to $<14 \text{ K}$ (-259°C), it undergoes transition to a solid state. These transition temperatures depend on pressure but require the gas to be cooled to at least 33 K (-240°C) to transform at very high pressures. The density of H_2 changes by about 3 orders of magnitude to $\sim 71 \text{ kg N m}^{-3}$ on transforming to the liquid state (Table 1),²⁵ and thus, enhances its transportability as well as its energy density. The energy content of H_2 , a technologically important parameter, is defined as the 'heating value' (HV) when it is converted into H_2O upon exposure to oxygen. The corresponding exothermic chemical reaction is written as follows:



The magnitude of heat released as a result of this exothermic reaction is termed the 'highest heating value' (HHV) and is found to be 142 MJ kg^{-1} (12.8 MJ N m^{-3}) of H_2 . In most common practices, however, H_2O is in the gaseous form (steam) and results in loss of heat or energy if this is not recovered. The corresponding energy released on transformation to steam is termed the 'lower heating value' (LHV) and is found to be $\sim 120 \text{ MJ kg}^{-1}$ (10.8 MJ N m^{-3}). Converting the gas into liquid increases the energy density by orders of magnitude but requires extraction of a large quantity of latent heat to cool the gas. Moreover, storing and transporting in the liquid state require the development of highly thermally insulating containers and pipelines. Hence, H_2 is manufactured, stored and transported in a compressed gaseous state. Since the mass density in the gaseous state increases with the increase in pressure, the energy content increases upon increasing the pressure, as shown in Table 1, and hence, H_2 is transported in pressurized form if not in the liquid state. This will increase the energy density although it is still far below that of gasoline, for example. The volumetric energy density of gasoline is ~ 3 orders of magnitude higher than that of H_2 gas but it is non-renewable.



Fig. 3 Pressure–temperature or phase stability diagram for H_2 shows the temperature–pressure fields, where it exists as gas, liquid or solid. It can be seen that extremely low temperatures and high pressures will be required to transform from one phase to another, including the solid phase. There are several variants within the solid and liquid phases and these are not shown here for simplicity. At room temperature and atmospheric pressure, it exists in the gaseous state.

1.4. Objectives of H_2 economy

The current scenario of global warming due to emission of various greenhouse gases has necessitated a shift from energy sources such as coal, oil and natural gas to non-polluting alternatives such as sun and wind. In this context, H_2 is proposed as a clean source of energy with minimal emissions. As an energy carrier it is extremely versatile and can substitute the fossil fuel-based energy carriers currently in use. If a transition to H_2 should occur, then all the different energy requirements along with the current needs in various applications have to be fully met, which means that the demand will increase manifold from the current level of 120 Mt per year. Hence, it becomes imperative to understand and analyze all the different aspects of H_2 – production to transport to utility. Most importantly, the true gain to the environment as well as its sustainability in the long run needs to be assessed. The sources of H_2 can be broadly classified into non-renewable and renewable sources. The different non-renewable sources are hydrocarbon gases, coal, tar sands, heavy oils and so on. The renewable sources are different types of biomass and water. The



Table 1 Physical properties of H₂ together with their potential heating values or energy delivery capacity on oxidation. The higher heating value can be realized if the energy in steam is gainfully extracted. The ignition temperature is high but the lower flammability limit is only 4 vol%, which makes it crucial to control leaks. Compressing the gas to different pressure levels leads to increased energy content and hence aids transportation logistics

Property	Value
Density (gas)	$8.988 \times 10^{-5} \text{ g cm}^{-3}$
Density (liquid)	$70.8 \times 10^{-3} \text{ g cm}^{-3}$
Higher heating value (HHV)	$142 \text{ MJ kg}^{-1}/12.77 \text{ MJ m}^{-3}/39.45 \text{ kW h kg}^{-1}/3.946 \text{ kW h m}^{-3}$
Lower heating value (LHV)	$120 \text{ MJ kg}^{-1}/10.79 \text{ MJ m}^{-3}/33.33 \text{ kW h kg}^{-1}/2.99 \text{ kW h m}^{-3}$
Energy density of gasoline	$46 \text{ MJ kg}^{-1}/12.2 \text{ kW h kg}^{-1}/9.7 \times 10^3 \text{ kW h m}^{-3}$
Heat of vaporisation	444 kJ kg^{-1}
Ignition temperature	$585 \text{ }^{\circ}\text{C}$
Lower flammability limit, in air	4 vol%
Upper flammability limit, in air	75 vol%
Pressure, MPa	Energy content, 10^3 MJ m^{-3}
20	2.53
55	6.96
70	8.86
80	10.12

Table 2 Comparative statement of different colours of hydrogen with respect to their potential for greenhouse gas (GHG) emission reduction. The comparison is limited to just three categories, high, medium and low in order to keep it simple and avoid excessive gradation. It can be seen that all forms of hydrogen have associated emissions at different stages of their production, including green hydrogen

Colour	GHG reduction potential	Comments
Gold	High	Naturally occurring; extraction related emissions only
White	High	Identification of geological formation; extraction related emissions only
Orange	High	Identification of suitable silicates; pumping water and extraction related emissions
Grey	Low	Source (methane) and energy are from fossil resources; both have associated emissions
Blue	Medium	Strongly dependent on emissions sequestration
Brown/black	Low	Source (coal) and energy from fossil resources; both have associated emissions
Turquoise	Medium	Pyrolysis of source; solid carbon hence no emissions; energy for pyrolysis has emissions
Purple/pink	Medium	Renewable source (water); nuclear energy (low carbon footprint)
Green	High	Renewable source (water); renewable energy resources

most common non-renewable source that is currently used extensively is methane (CH₄), as it has the highest H/C ratio of 4 and the most renewable source is water (H₂O), which can be split using electricity. Hence, in the present work, the conversion of CH₄ and H₂O into H₂ is discussed in detail, as they hold the highest potential for scaling up to extremely large quantity production. The objective of this work, therefore, is to review the different aspects of the supply chain and associate wherever possible environmental and ecological factors to these processes. It should be mentioned here that since most of these processes are not performed on a large scale, the environmental parameters and materials issues will either be extrapolations or estimates. These, however, will need to be refined/modified, as we gain experience in the future and development takes place.

2. Hydrogen production

2.1. Natural hydrogen

Naturally occurring H₂ deposits are currently not fully explored and mapped due to various reasons such as economic and

geopolitical, including non-availability of accurate detection methods.¹⁵ The concentration of H₂ gas in the naturally occurring deposits varies from region to region as the source is different in different locations. The concentration of H₂ in these deposits can vary from 10% to >90%.^{14,15,20,26,27} The most common gases associated with H₂ in these deposits are N₂, CH₄ and a combination of these gases. An interesting aspect of some of these deposits is that there is a constant production of fresh H₂ due to reactions such as serpentinization, which means that it is a never-ending source. Although these sources exist and new deposits are being discovered, a challenge however is to separate H₂ from the other gases and make it suitable for transportation and consumption. Current estimates show the naturally occurring H₂ gas potential is ~0.1–10 Mt per year. The industrial requirement, other than being an energy carrier alone, is ~120 Mt per year, far in excess of current naturally occurring deposits. The current gas requirement is far in excess of naturally occurring resources. Recently, however, the US Department of Energy awarded a USD 20 million grant program



© 2024 The Author(s). Published by the Royal Society of Chemistry



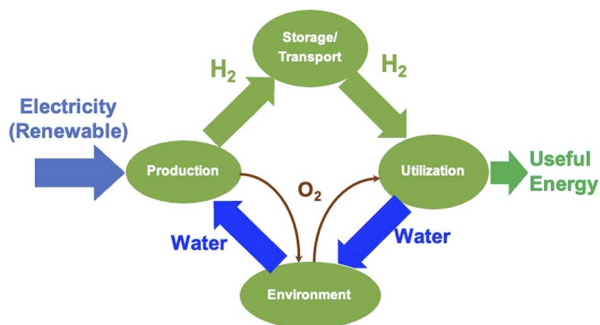


Fig. 4 Splitting of water (H_2O) using renewable electricity is a net-zero emission process and is also circular in nature, becoming completely sustainable. This is because the product of H_2 combustion will produce H_2O , which can be reused if collected at the source and recovered completely. This process can be least harmful both environmentally and ecologically.

- Anion Exchange Membrane (AEM), and
- Solid Oxide Electrolyte (SOC).

The typical cell structure of these 4 different electrolyser is shown in Fig. 5.⁷ Irrespective of the type of configuration, H_2 evolution occurs at the negative cathode while O_2 evolution occurs at the positive anode. The half-cell reactions in the 4 electrolyser and the corresponding standard potentials are given as follows:

Alkaline:



Proton Exchange/Polymer Electrolyte Membrane (PEM):


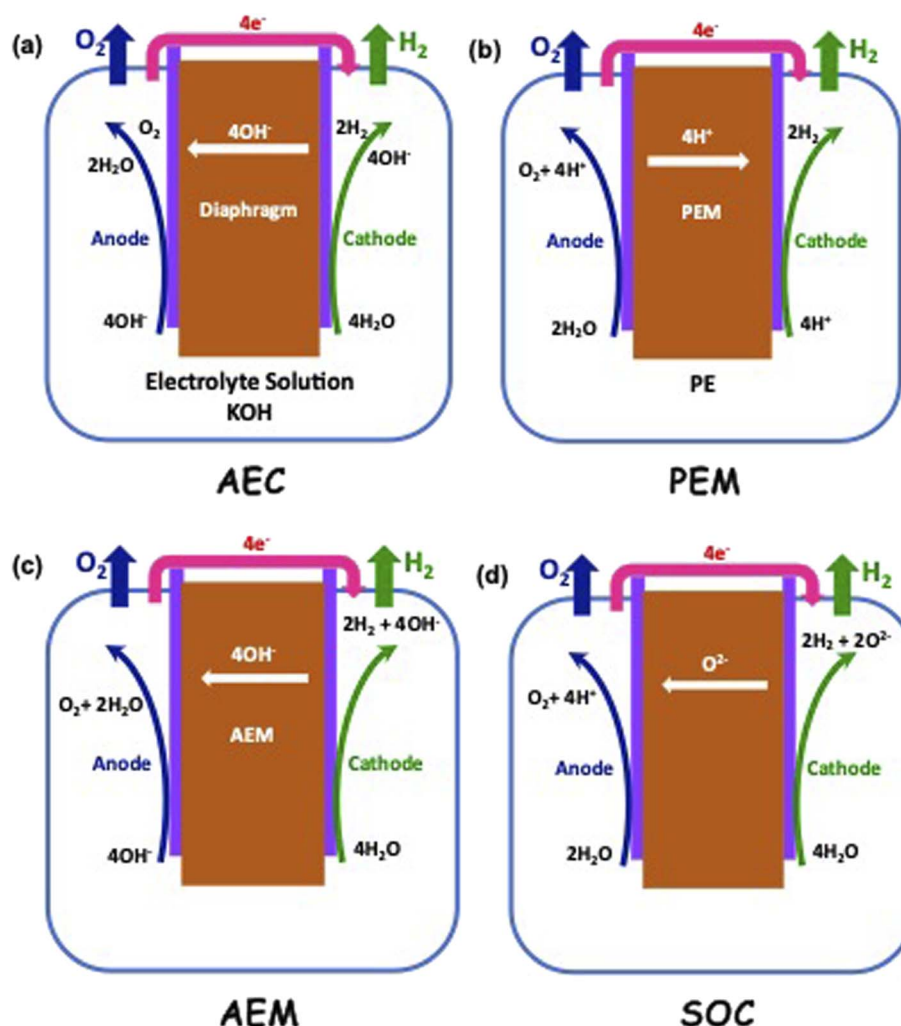


Fig. 5 Different electrolysis processes with electrode reactions and dominant moving ions across the membranes are shown. (a) Alkaline liquid electrolyser cell (AEC) (b) polymer electrolyte membrane (PEM) electrolyser, (c) anion exchange membrane (AEM) electrolyser and (d) solid oxide electrolyte (SOC) electrolyser. Among the 4 different types of electrolytic cells, the AEC uses a liquid electrolyte, while the others use solid electrolytes/membranes. The SOC process essentially operates at elevated temperatures.



RSC Sustainability



- Pressurized adsorption of CO₂ and other impurity gases onto a sorbent known as Pressure Swing Adsorption (PSA); and
- Selective diffusion of H₂ across a membrane known as membrane separation.

In the case of PSA, the hot gases from the water–gas shift reactor are pressurized to ~4 MPa and passed over a sorbent, which adsorbs CO₂ and other gases by physisorption. The sorbent used is either a molecular sieve such as zeolite or activated carbon. The efficiency of separation reduces with time and the sorbent gets saturated with CO₂ and other impurity gases. The separation occurs in a vertical packed bed column reactor and is a batch process. In large-scale production plants, multiple column reactors connected in parallel are used to enhance productivity and a semicontinuous production capacity, as shown in Fig. 6.³⁶ Reducing the gas pressure in saturated sorbent columns in several discrete steps releases CO₂ and other impurity gases and leads to revival of the sorbent material. Because of this, the separation efficiency is around 90%, while H₂ produced will be 99.999% pure. Industrial units ranging in production capacity from 500 to 100000 N m³ h⁻¹ having up to 12 column separators are currently being used.

Cryogenic separation of H₂ by cooling the mixture of gases to <216 K (–57 °C) at a pressure of 0.5 MPa enables the liquefaction of CO₂ and thus separates gaseous H₂. This method however is energy intensive but has the advantage of converting CO₂ into liquid, a dense form compared to gas and is more amenable to transportation in cryogenic containers and subsequent sequestration.

The separation of H₂ can also be performed by pressurizing the gases to flow across a membrane. These membranes can be either non-porous or porous and separation occurs mainly due to the high diffusivity of H₂ in the membrane due to its smallest size. Typical non-porous membranes are metallic in nature and the most commonly used metal membrane is made of Pd and its alloys. The non-porous membranes made of perovskite compounds such as SrCeO₃ or BaCeO₃ are also used for H₂ separation at high temperatures, while the porous membranes are molecular sieves made of zeolites or silicates with pore sizes <1 nm. There are several polymeric as well as mixed membranes that have also been used for gas separation. These can be both porous and non-porous glass or rubbery polymers.³⁷ The biggest advantage of polymeric membranes is their flexibility compared to inorganic membranes, which tend to be brittle in nature. The pure polymeric membranes, however, have low thermal stability compared to inorganic membranes, which can operate well even at 400 °C. In order to exploit the flexibility of polymeric membranes and the thermal stability and selectivity of inorganic membranes, mixed membranes made of both polymeric and inorganic materials have been developed and these have been found to exhibit good performance. Typical polymeric membranes are made of polyimide, polysulfone, polybenzimidazoles, polycarbonate, polyethersulfone and so on. Inorganic nanoparticles such as Pd, silica, and carbon nanotubes have been incorporated in these polymers to realize mixed membranes with separation properties better than polymer-based membranes. The gas flux J_i of the component i across

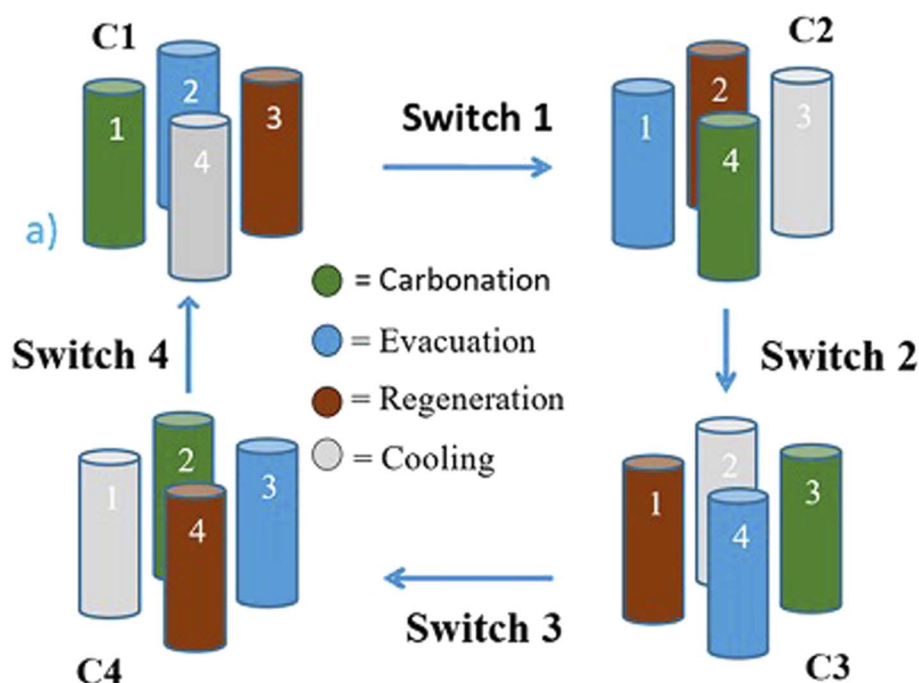


Fig. 6 A typical 4-column configuration of pressure swing adsorption facilitates continuous operation of the process, leading to enhanced operation efficiency and regeneration of the catalyst. This is because multiple columns operate simultaneously and each of the columns has a different functionality leading to a continuous mode of operation as far as H₂ separation is concerned. The different colors of the columns clearly indicate the different functions at any stage of the separation process. This configuration will be highly beneficial for large-scale gas production.



the membrane is a diffusive phenomenon and is governed by the following equation:

$$J_i = \frac{D_i C_i}{RT} \left(\frac{\partial \mu_i}{\partial x} \right) \quad (9)$$

where D_i , C_i and μ_i are the diffusion constant, concentration and chemical potential of component i in the gas mixture and R and T are the gas constant and temperature respectively. Apart from the concentration gradient across the membrane, the diffusing flux depends strongly on D_i , which, in turn, depends directly on the temperature and inversely on the pressure. The chemical potential gradient that drives the diffusion process becomes extremely large if the overall diffusion distance becomes small, *i.e.*, the membrane thickness becomes very small. Hence, the membranes are typically $<10 \mu\text{m}$ thick and, in many cases, are mounted on substrates for mechanical stability. In the case of non-porous membranes, H_2 has been predicted to diffuse mainly in ionic form, *i.e.*, breakdown of the molecule into a monoatomic state followed by ionization and subsequently the reversal of the processes. In the case of porous membranes, however, it has been predicted to diffuse predominantly in molecular form. It can be seen that membrane separation is a complex process involving several stages and also the membranes have an associated risk of getting poisoned/contaminated by harmful impurity gases in the gas mixture. Hence, for large-scale industrial operation, the most preferred process is the pressure swing adsorption, and industrially, this process has been optimized to a large extent.

4. Sustainability evaluation

The concept of sustainable development encompasses the three most important aspects – planet, people and prosperity. These, in turn, have several components which deal with the environment, materials, economics, legislation and so on. The scope of this review is limited to discussion in detail of the technical aspects of H_2 production and its environmental consequences defined in terms of embodied energy for the manufacture of H_2 and associated emissions, ecological impact and materials required including input materials such as natural gas and water for the SMR process and electrolytic splitting respectively. The other components such as economics and legislation are equally important and a detailed discussion of these is beyond the scope of the current review. However, the important and essential economic and legislative components are mentioned without going into exhaustive details. A concise sustainability, circularity analysis of H_2 production using any of the production methods has to clearly define the 'System Boundaries'. These boundaries are extremely important and can make a considerable difference. In the present work system, boundaries are clearly defined and available data are analyzed within this boundary limit. The sustainability criteria can limit to environmental and ecological impact assessment or encompass the economic and social aspects of H_2 production. The materials and various infrastructure facilities required are estimated using available data/information. The environmental and

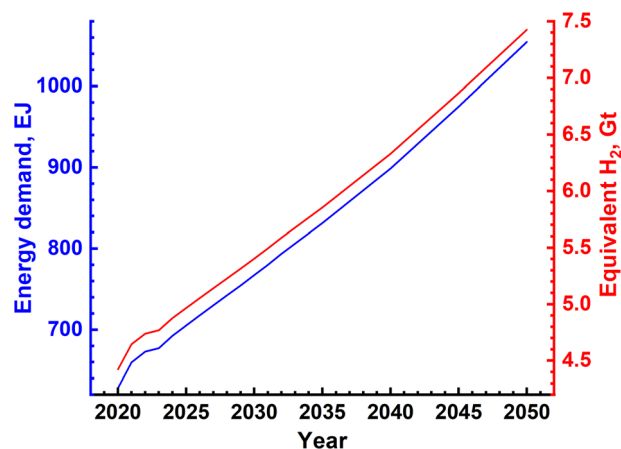


Fig. 7 Energy demand till the year 2050 has been forecasted by the US Energy Information Agency's Energy outlook report of 2023 and is shown here together with the equivalent amount of H_2 gas required to generate the yearly energy demand, assuming that complete energy requirement is met by H_2 . To convert the energy demand into equivalent H_2 amount, the higher heating value has been used, which gives the lower limit of gas requirement. The actual requirement will be higher than the value shown here.

ecological parameters for the different processes are discussed together with economic factors where feasible.

The projected global energy demand till the year 2050 based on past energy consumption has been estimated by the Energy Information Agency (EIA) in the International Energy Outlook 2023 report³⁸ and this is shown in Fig. 7. It is seen that the energy demand increases from ~ 650 EJ to 1000 EJ at an average rate of 2% per year. This energy demand can be translated into the amount of H_2 gas requirement using the best case scenario of HHV, and this is also shown in Fig. 7. It is seen that the amount of H_2 gas required to meet this energy demand increases correspondingly from 4.5 Gt to 7.5 Gt or 50 teraN m^3 to 85 teraN m^3 every year. This requirement is based on the assumption that the total energy requirement will be met solely by H_2 , which is not true as renewables are anticipated to directly contribute a significant fraction of the energy demand. Even if one assumes a 50% energy demand being met by alternatives such as renewables and nuclear, the H_2 gas needed will still be in the range of 2.25 Gt to 3.75 Gt per year, which is enormous compared to 120 Mt produced in the year 2020, 3 orders of magnitude less than the requirement. This means that a significant expansion in production capacity has to be achieved at the earliest possible. As mentioned earlier, SMR and electrolysis of water using the alkaline electrolyte cell (AEC) are two processes that have the potential for expansion and large-scale production, and hence, the sustainability of these two processes is discussed below. Moreover, natural gas is a non-renewable fossil source, while water is a renewable source which is almost infinite on earth.

4.1. System boundaries

4.1.1. Steam reforming of methane. The major resource inputs for SMR are naturally occurring, non-renewable fossil



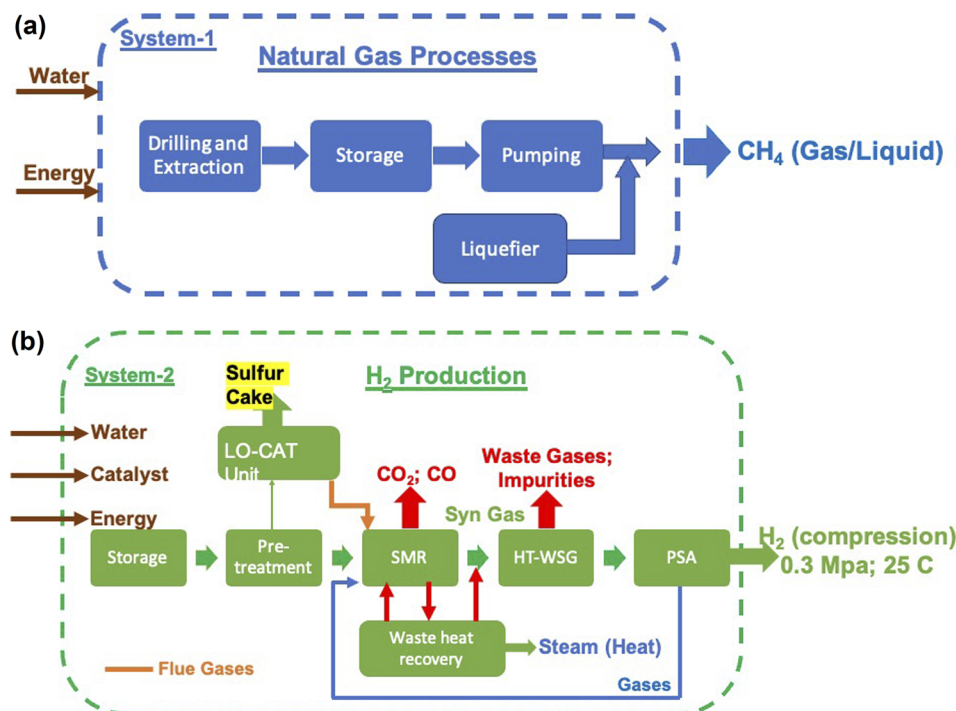


Fig. 8 System boundary of the SMR process for life cycle assessment can be split into two distinct stages. Stage 1, (a), concerns natural gas mining, extraction and transport to the final usage site, while Stage 2, (b), is exclusively concerned with steam methane reforming of natural gas to produce H_2 , which can be compressed for transport. The H_2 produced will be of 99.9% purity and in gaseous form. Some life cycle assessments consider only Stage 2, while some consider both stages.

fuel methane, water and energy. The naturally occurring methane gas has been found in select locations across the earth, which means that the gas has to be extracted and transported to the site of H_2 production plant. The situation with respect to water may not be all that critical as compared to methane gas but obtaining the requisite quality becomes essential. However, energy again may be a commodity, access to which is not easy or straightforward. Hence, defining a system boundary which either considers all these as a given or explicitly accounts for these becomes important. A typical process flow sheet for SMR can be considered as two independent systems, as shown in Fig. 8. System 1 comprises prospecting and producing natural gas, which is required for the SMR process while System 2 defines the boundary with input as natural gas and output as high-purity H_2 . The two are shown separately because natural gas prospecting is an independent operation and does not

depend on H_2 production, finding its own use. The System 2 however depends on System 1 as it cannot be operationalized without the feed from System 1, *i.e.* natural gas. Hence in the literature, several studies have considered only System 2 for life cycle studies. In the present work, however, the sustainability of the SMR process which includes both systems 1 and 2 is presented.

The three major inputs needed for the SMR process are; (1) natural gas, (2) electrical energy and (3) water. The typical values

Table 4 Different input requirements for the SMR process to produce 1 kg of H_2 . The nature of electricity mix varies across countries as many European countries have major contribution from renewable resources. The data are obtained from different capacity plants, and since the SMR process has been in use for several decades now, these are actual working plant requirements

	Ref. 39	Ref. 38	Ref. 40–48
SMR process natural gas, kg	2.55	3.25	2.76
Electricity, kW h	1.31	0.4	1.8
Water, kg	—	19.8	17.1

Table 5 Different catalyst materials used in the natural gas reforming reactor, water shift reactor and pressure swing adsorption unit. These need to be changed once every 2 or 3 years and hence do not come under large-scale material requirement. These are for the production of 1 kg of H_2 gas

Material, kg	
ZnO	3.36×10^{-4} ; replenished every 2 years (desulfurization)
ZnO	2.35×10^{-5} ; replenished every 3 years (catalyst in WGS reactor)
Aluminum oxide	7.84×10^{-6} ; replenished every 3 years (catalyst in WGS reactor)
Copper oxide	2.09×10^{-5} ; replenished every 3 years (catalyst in WGS reactor)
Co_2O_3	2.05×10^{-5} ; replenished every 3 years (catalyst in SMR reactor)
Activated carbon	6.92×10^{-4} ; replenished every 2 years (PSA bed)



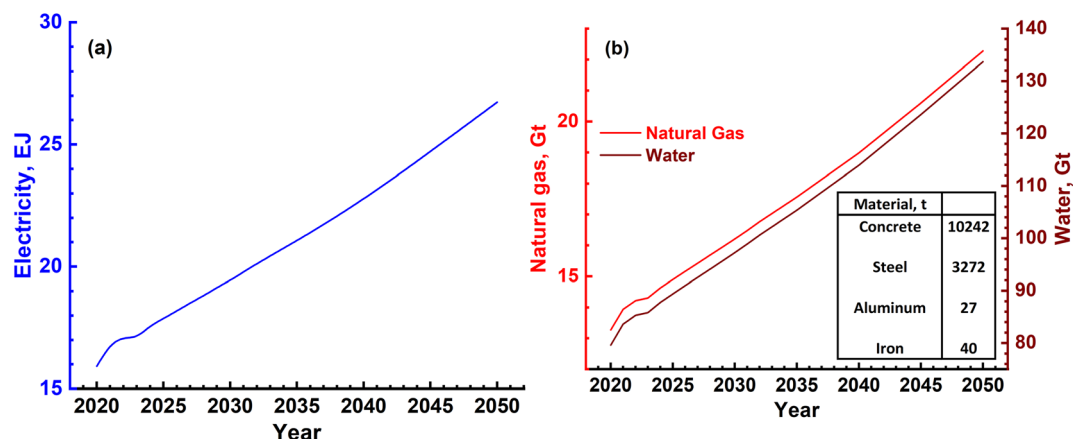


Fig. 9 (a) Magnitude of annual electrical energy required to produce H₂ gas using the SMR process. (b) Electrical energy is required mainly in the reforming reactor together with natural gas and water. Both natural gas and water will be required in Gt quantities every year. The materials needed to construct a H₂ plant with a production capacity of 1.5 MN m³ per day are mentioned in the inset of (b). Apart from these, different catalyst materials will also be needed as given in Table 4. However, these are not as large in magnitude as cement, steel and Al.

of these inputs obtained based on actual plant operating conditions in certain cases and plant simulations in others are given in Table 4.^{38,39} Different catalysts such as activated charcoal, ZnO, Al₂O₃, Co₂O₃ and CuO that are required are given in Table 5. These can be revived and need replacement once in 2 or 3 years. Apart from these, several other inputs such as catalysts, steel, cement and land will also be required. These, however, will be small as they are mainly infrastructures in nature and last for the lifetime of the plant, typically 20 years or more. Hence, these are not discussed as main requirements. The 3 major requirements were determined based on the H₂ gas requirement, and are shown in Fig. 9a and b. It is seen that electricity requirement ranges from 15 to 25 EJ per year, while that of natural gas varies from ~13 Gt to 23 Gt per year till the year 2050. The SMR process requires fresh water for various operations and the corresponding need ranges from 80 Gt to 140 Gt per year or 80 to 140 T per litres.

The environmental impact is generally assessed by the amount of emission of greenhouse gases and is represented in terms of equivalent CO₂ quantity. In the case of SMR process, emissions are due to two distinct sources – natural gas mining and breakdown in the reactor and electricity use for the different processes. The emissions due to electricity utilization vary from country to country as the renewables' fraction is different in different countries. The most extensive and reliable data available is from H₂ production facilities in USA and Canada and these are given in Table 6.^{39–45,50} It is seen that, on an average, 10 kg s of CO₂ is emitted for every kilogram of H₂ gas produced. This means that the amount of CO₂ emission alone will be of the order of 10's of Gt. The actual yearly emissions based on the amount of H₂ produced were determined, and are shown in Fig. 10. These emissions include those which arise due to natural gas prospecting, processing and decomposition as well as electricity utilization in the different aspects of the SMR process. The emissions range from 45 Gt to 75 Gt per year.

4.1.2. Water splitting by electrolysis. As the name suggests, the two major inputs for this method of production of H₂ are

Table 6 Various environmental parameters of the SMR process from different sources reported in the literature. The most commonly reported parameter is CO₂(e), which consists of warming potential of all gaseous emissions. Apart from the gaseous emissions, both 2.5 μm and 10.0 μm particulates are emitted into the atmosphere but not all reports mention these parameters. Not all environmental pollution-related parameters are reported reliably in several publications. The units are kg per kg of H₂ gas produced

Environmental parameters, kg	Ref. 49	Ref. 39	Ref. 38
CO ₂	9.35 (4.69–17.31)	10.5 (7.74–12.6)	10.621
CH ₄	2.36×10^{-4}	—	6×10^{-2}
NH ₃	2.36×10^{-4}	—	—
CO	0.27	—	6×10^{-3}
NO ₂	—	3.48×10^{-5}	—
NO _x	1.68×10^{-3}	4.77×10^{-3}	12×10^{-3}
SO ₂	10^{-4}	2.58×10^{-4}	10^{-3}
PM _{2.5}	4.44×10^{-4}	—	—
PM ₁₀	5.35×10^{-4}	—	—
VOC	9.01×10^{-4}	—	—
Pb	5.07×10^{-8}	—	—
Methanol	2.14×10^{-5}	—	—
Water	—	17.1 (7.5–21.9)	19.8

'clean' water and electricity. The water used for electrolysis has to be devoid of all impurities – both inorganic and organic as these will not only reduce the cell performance but also lead to cell life degradation. Hence, the water has to be treated before being fed to the electrolysis cell. The other major input is electricity required to split water molecules. This energy can be obtained from a wide variety of resources – non-renewable and renewable, and needs to be considered separately. Hence, the large-scale electrolysis process can be considered as two separate systems from the perspective of sustainability evaluation – System 1 comprising the water treatment and electricity handling sub-systems and System 2 comprising of the actual water splitting process together with H₂ compression and cooling unit, which makes it ready for transportation and



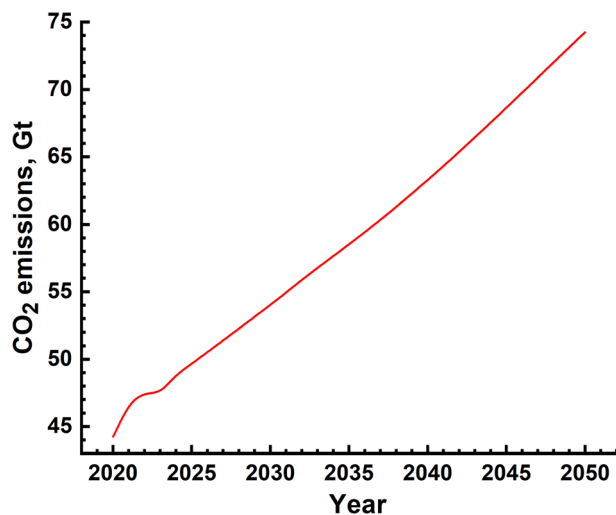


Fig. 10 Annual CO₂ emissions due to H₂ production using the SMR process increase with the increasing energy demand from about 45 Gt to 75 Gt by the year 2050. This constitutes a significant fraction of annual global emissions. The data include emissions due to electricity generation and are mainly from production plants in the USA, Canada and Europe, where there is substantial renewable electricity mix in the overall electricity generation.

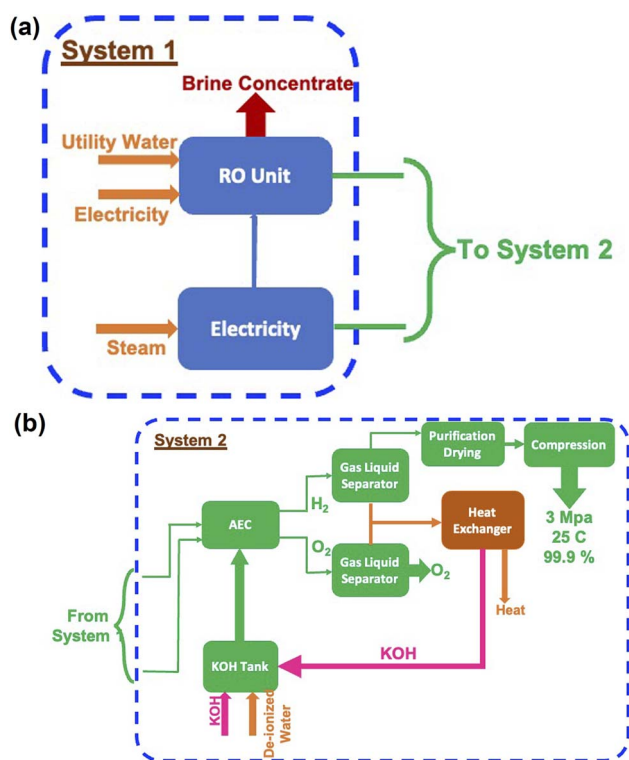


Fig. 11 System boundary for water splitting *via* electrolysis can be separated into two distinct stages for life cycle assessment. In stage 1, (a), the utility water or sea water is completely purified so that it meets the input quality requirement of water electrolysis. In stage 2, (b), water is split into H₂ of 99.9% purity *via* electrolysis and compressed so that it can be transported for further use. Several studies consider only stage 2 for life cycle assessment as stage 1 is considered insignificant in terms of energy and emission.

Table 7 Water splitting electrolysis plant's main requirement will be electricity apart from water. The water will be from regular brackish sources, which has to be purified to be used in the electrolysis unit. Currently there are no electrolysis 'plants' which use sea water directly without purification. The electricity mix can vary across countries in the world to include electricity generated from renewable resources. The requirements given are typically to produce 1 kg of H₂ gas

	Ref. 39	Ref. 50–54
AEC electrolysis electricity, kW h	56.1	54.3
Water, kg	13.05	13.3
KOH, g	0.81	1.2

further use. These two systems are shown schematically in Fig. 11. It should be noted that electricity in the form of direct current will be used for electrolysis, which means that the alternating form generated by the different electricity generating processes has to be first rectified.

In the case of splitting water by electrolysis in an alkaline electrolytic cell, the main requirement will be for electricity, water and electrolyte (KOH).⁴⁰ These are given in Table 7 and the amounts required as per energy demand are shown in Fig. 12a and b. The electricity requirement increases from ~900 EJ to 1500 EJ per year, while that of the electrolyte increases from 4.5 Mt to 7.5 Mt. Furthermore, the water demand varies from ~60 Gt to 100 Gt or 60 to 100 T per litres per year. The typical cell configurations have Ni-electrodes, stainless steel separators and polyphenylene sulfide packing, and these will be required in millions of tons to install and commission large-scale H₂ production.

The water splitting electrolysis process does not directly generate emissions, but requires electrical energy, the generation of which leads to emissions. Again, based on a country's electricity generation mix, the magnitude of emissions varies.^{40,49,51–54} Since there are no large-scale water splitting units operating commercially, the equivalent emissions have been determined based on the electricity requirement given in Fig. 12(a). The yearly emissions due to H₂ production based on two limits of 390 g kW h^{−1} and 820 g kW h^{−1} were determined,⁵⁵ and are shown in Fig. 13. These are about an order of magnitude higher than the emissions due to the SMR process, as shown in Fig. 10. These can vary from ~90 Gt to 160 Gt in the best-case scenario to 200 Gt to 340 Gt in the worst-case scenario. The emissions due to water splitting by electrolysis are essentially due to electricity consumption.

Apart from the environmental consequence of emitting various global warming gases and particulates into the atmosphere, large-scale production of H₂ gas also leads to significant ecological emissions and impact. These ecological emissions lead to various effects such as fresh water toxicity, which affects both humans and other living organisms. The different ecological impact parameters due to both the SMR process and water splitting by electrolysis are given in Tables 8 and 9. If one considers the fact that these parameters are due to the production of just 1 kg of H₂ gas, the intensity of producing gigatons of H₂ gas becomes extremely severe and requires serious consideration.

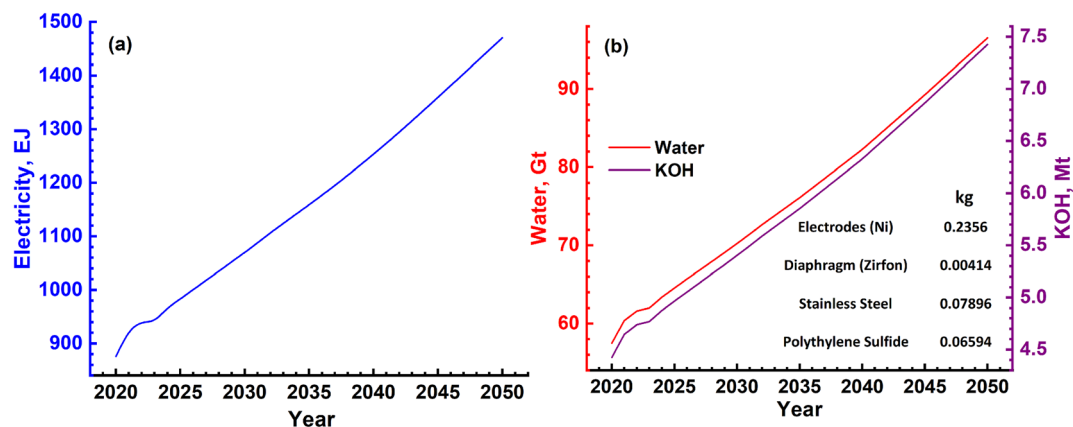


Fig. 12 (a) Electrolysis process requires a significant amount of electrical energy annually for splitting water. This will increase to ~1500 EJ by the year 2050 and become highly critical. (b) The corresponding annual requirement for water and the electrolyte KOH. The water requirement is of the order of several Gt each year. The magnitudes of other electrolytic cell materials such as electrodes, separators and sealants required to produce 1 kg of H₂ gas are given in the inset of (b). It can be seen that the supply of these materials can become critical with the increase in H₂ production.



Fig. 13 Amount of yearly CO₂ emissions due to large-scale production of H₂ using water splitting by electrolysis, and they are a significant fraction of available CO₂ emissions in the limit for 2.0 °C global warming scenario. Since production via electrolysis has not reached large-scale industrial capacity, actual emissions data are not available. Hence, the electricity demand is converted into equivalent emissions based on two limits of 390 g kW h⁻¹ and 820 g kW h⁻¹ across the world.

5. Discussion

Large-scale production of H₂ using either conventional fossil fuels such as methane and coal or splitting of water has been shown to be technologically feasible. Specifically, steam methane reforming has been in use since a long time while water electrolysis is at a very nascent stage. Scaling-up these technologies to meet the current and growing energy demand, however, requires a relook at these and, most importantly, a careful analysis of the sustainability implications of this

Table 8 Different ecological impact parameters due to H₂ production by reforming of natural gas. All these parameters are for the production of 1 kg of H₂ gas, and the toxicity parameters are with respect to 1,4-dichlorobenzene except ozone formation, which is NO_x equivalent, and acidification, which is SO₂ equivalent. These ecological parameters are due to the production of 1 kg of H₂

Ecological parameter, kg	
Freshwater ecotoxicity	3.12×10^{-8}
Human carcinogenic toxicity	1.46×10^{-2}
Human non-carcinogenic toxicity	1.52×10^{-3}
Marine ecotoxicity	6.13×10^{-6}
Ozone formation, human health	1.68×10^{-3}
Ozone formation, terrestrial ecosystems	1.68×10^{-3}
Terrestrial acidification	1.17×10^{-3}
Terrestrial ecotoxicity	3.28×10^{-3}

Table 9 Ecological impact of water spitting into H₂ via electrolysis in an alkaline electrolyte cell is given by these parameters. The different toxicity parameters are given in terms of equivalent 1,4-dichlorobenzene, while acidification is given in the equivalent SO₂ level and the ozone depletion is in terms of equivalent chlorofluorocarbon 11. The data correspond to a stack unit with 1 m² area capable of producing ~29.485 tons of H₂

Ecological parameter, kg	
Ozone depletion	8×10^{-6}
Acidification	1.4
Terrestrial toxicity	3.3×10^2
Fresh water toxicity	3.3
Marine toxicity	4.7
Human carcinogenic toxicity	1.3
Human non-carcinogenic toxicity	110

energy transition. Sustainability analysis of any process or product is multidimensional in nature and has several components such as technical feasibility, energy, environment



and ecological implications, financial requirement, and societal and governmental obligations. Specifically, a fast shrinking remaining CO₂ budget for either 1.5 °C or 2.0 °C global warming scenario makes it absolutely imperative to analyse the environmental and ecological sustainability of this transition.

The SMR process has been conventionally used for producing H₂, which is used mainly in NH₃ production and oil refining. The technology therefore has matured considerably and is ready for even larger upscaling. This is evidenced by one of the recent large-scale facilities that became operational in April 2021, shown in Fig. 14, producing 56000 N m³ per hour of 99.99% pure H₂.⁵⁶ The main inputs for the SMR process, as

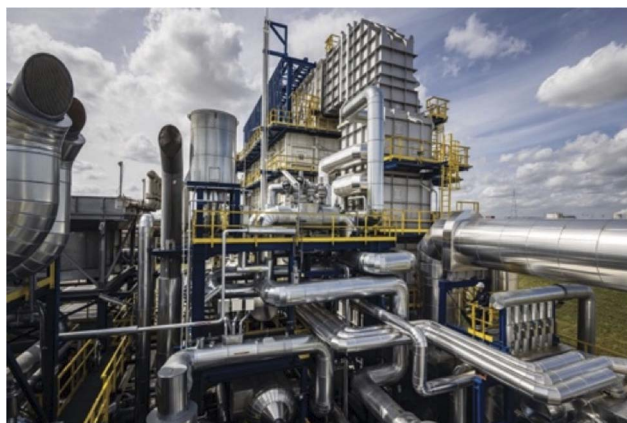


Fig. 14 One of the recent SMR-based H₂ production facilities (Air Liquide's SMR-X process) in Antwerp, Belgium, produces 99.99% pure H₂ at a rate of 56000 N m³ per hour. The plant went into operation in April 2021. This shows the complexity of the plant and the stainless steel structures required in the form of pipes which carry hot gases.

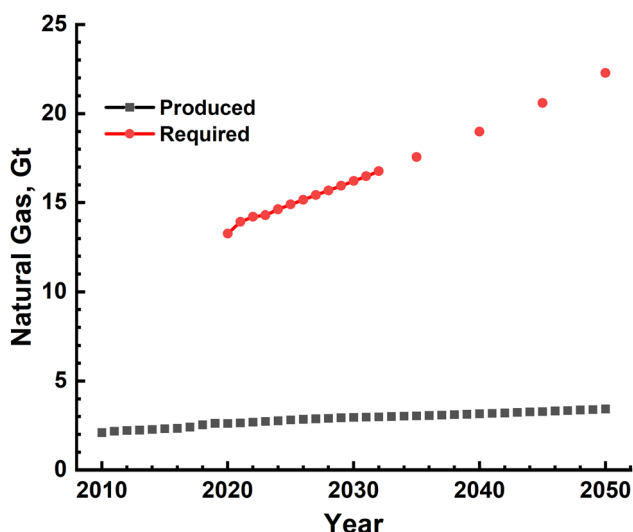


Fig. 15 Quantity of annual global natural gas production and its estimated production till the year 2050 are shown together with the quantity required based on the energy demand. It is clearly seen that projected production lags behind the requirement, indicating a severe supply chain risk associated with H₂ production to meet the complete energy demand, *i.e.* H₂ economy.

mentioned earlier, are natural gas, electricity and water. If one considers the availability of natural gas, the quantity produced in the world since year 2010 and projected production till the year 2050 are shown in Fig. 15. The global production capacity increases steadily from ~2.0 Gt in the year 2010 to 3.4 Gt by the year 2050. This is an order of magnitude lower than the H₂-based energy demand, clearly showing that natural gas availability will run the risk of severe short fall and hence prospecting and production capacity needs significant increase. The available global reserves as of the year 2022 were estimated to be ~110 Gt and the amount of methane present in the form of methane hydrates was estimated to be ~5 orders of magnitude higher than terrestrial reserves. The exploration and production of natural gas, however, has to be done extremely carefully avoiding any leakage into the atmosphere, as its global warming potential is ~28 times higher than that of CO₂. Natural gas is one of the non-renewable fossil sources used in the reforming process. An alternative would be different types of biomass – solid and liquid, which can also be used as input in the reforming process. They are also renewable in nature and hence have been extensively investigated for producing H₂. The biomass can be of different types varying from simple organic wastes such as grass, coconut shell, and corncob to sewage sludge. Two methods of treating these were investigated at best in laboratory/pilot-scale set-ups or purely based on thermodynamic and kinetic modelling of the reactors.^{46,57,58} The output of these processes is a mixture of gases such as H₂, CH₄, higher hydrocarbons and CO, which have an excellent combustion value. Production of pure H₂ requires further processing including techniques such as pressure swing adsorption. The real environmental benefits of these, however, need to be assessed as and when large-scale production becomes feasible in the future. An attractive feature of these is that they add value to everyday waste and thus lead to 'valorisation' of common waste. It should however be mentioned that common organic and agricultural wastes already find use as animal feed and in composting to produce organic fertilizers. The amount of electrical energy and water needed to implement natural gas SMR-based H₂ production is shown in Fig. 9, and these clearly indicate that 10–30 EJ of energy will be needed to produce the gas while the water requirement increases to ~140 Gt by the year 2050. This water cannot be saline as it affects reactor performance and this huge quantity of fresh water requirement year on year imposes considerable load on natural fresh water systems, in direct conflict with human and food production needs. The other most important impact is the magnitude of CO₂ emissions which is 10's of Gt due to H₂ gas production alone. An alternative to mitigate CO₂ emissions into the atmosphere is the capture and subsequent sequestration and utilization (CCSU), and thus, changing H₂ from being grey to blue. However, the CCSU technology is still in its infancy with mainly trials/pilot schemes in operation. The feasibility of large-scale implementation of these schemes is still a subject of debate and needs significant research and analysis. Another alternative to reduce effective emissions is to transition to electrical energy provided solely by renewable resources such as solar, wind and hydro. Scaling of these is again highly debated, and thus,



making H_2 production a completely green activity needs further developments. Apart from the emissions associated with steam reforming, ecological impact also becomes significant, as given in Table 8.⁵⁹ The contamination of water resources, as measured by fresh water toxicity, amounts to ~ 149 tons for the year 2023 alone and increases with the increasing energy demand. The carcinogenic toxicity levels and terrestrial acidification of soil and water bodies become millions of tons, clearly showing the disastrous consequences of large scale H_2 production.

An alternative to natural gas used as the source of H_2 is water (H_2O) a renewable source. The inherent advantage of this method is that the oxidation or usage product is H_2O with no associated emissions and being truly circular in nature. The main concern in this method is that it requires electrical energy to split water and this will be in the range of 1000's of EJ per year, as shown in Fig. 12 and is too large. If this electrical energy can be provided by renewable resources alone, then water electrolysis to produce H_2 will be an ideal sustainable choice, the case of green H_2 . One of the truly green H_2 production facility that became operational recently, in the year 2022, in Spain is shown in Fig. 16. This plant is based on polymer electrolyte membrane (PEM) cells and is capable of producing ~ 360 kg of H_2 every hour which is used mainly to produce 'green ammonia'. This plant is powered by a 100 MW p photovoltaic solar facility located near the adjacent fields, as seen in Fig. 16. To compensate the varying solar power generation, a 5 MW Li-ion battery system capable of 20 MW h storage is also part of this H_2 production facility.⁶⁰ It is seen that green H_2 production requires setting up large and exclusive renewable electricity generation plants such as solar photovoltaics, wind mill farms or captive hydroelectric power stations along with power storage systems such as Li-ion battery systems. Setting up these dedicated electrical power generation plants will require both material and economic resources. In the short term, they will lead to generation of emissions and pollutants as well as create material supply risks. For example, setting up just a 1 MW p Si photovoltaic (PV) power plant will require anywhere from 2.0 t to 7.0 t of 9 N purity solar-grade Si apart from other materials and will result in emitting about 680 t to 1720 t of $CO_2(e)$ into the atmosphere.⁴⁷ This however is not completely feasible and conventional methods of electrical energy generation will be needed. The electricity generation mix varies from country to

country, and as a result, the net emissions also vary. The net emissions considering two extreme limits for CO_2 emission to generate electricity across the world show that they are in the range of 100's of Gt per year (Fig. 13), a significant fraction of available carbon limits for global warming. Another major input for water splitting is water, which is required in Gt quantities every year. This will lead to stresses in human water consumption requirement as well as food production. The fact that extremely pure water is needed for electrolysis means that water purification will result in the generation of 'brine or salt' concentrate and release of this will lead to ecological damage, as given by the various parameters in Table 9.⁴⁸ Terrestrial toxicity will be ~ 53 million tons, while acidification is 0.25 million tons for the year 2023 alone and increases with the increase in H_2 production. The ecological impacts are extremely significant and show the non-viability of this technology. An alternative to fresh water electrolysis would be direct sea water electrolysis using renewable electrical energy, which will be highly effective and completely sustainable. A recent study has demonstrated the feasibility of such a process using renewable wind energy.⁶¹ An important point to be noted here, however, is that the water generated due to the use of H_2 can in principle be reused for electrolysis again, thus completing the cycle. This however requires effective sequestration and transport of water to the electrolysis unit, which becomes a logistical near impossibility. The water produced as a result of use cannot be used either for human consumption or agriculture as it is highly 'demineralised' and hence has to be released into the atmosphere, if it is not to be sequestered for reuse in electrolysis. The electrolysis process also requires an electrode material, Ni, of the order of million tons. Although it becomes enormous magnitude wise, it is not a recurring consumable and has a finite life. Its supply however can become critical as it is used in a wide variety of applications ranging from catalysis to stainless steel manufacturing. The other materials that will be needed to implement large-scale H_2 utilization will be available in sufficient quantity and may not pose significant supply chain risk.

The case of producing green H_2 is being pursued actively across the world as it is being forecast to play a significant role in decarbonizing energy generation as well as supplement grey H_2 usage in several hard-to-abate applications.⁶² The two main



Fig. 16 Green H_2 production facility, Iberdrola, established in the year 2022 in Spain. This water electrolysis facility produces 360 kg of H_2 per hour and is powered by a solar photovoltaic plant with an installed capacity of 100 MW p. The plant also has a Li-ion battery system for streamlined and steady electrical power supply to the plant. This clearly illustrates that green H_2 production requires not only a renewable electricity generation system but also an electrical energy storage system.



factors that limit the large-scale adoption of green H_2 are the availability of renewable electricity and the capital costs involved in the installation of green H_2 plants. Regarding establishing dedicated renewable electricity generation facility, as mentioned earlier with the example of solar PV, it will have associated material supply risks and short-term emissions, which need careful planning and execution. Three of the major producers, namely the European Union, the United States of America and Canada, have recently specified strict regulatory conditions for green H_2 projects, commonly referred to as the '3 pillars'.⁶³ These require (1) the electrolyzers' electricity consumption to match renewable electricity production timing, (2) electrolyzers to source electricity from within the same region and (3) that the renewable electricity is sourced from newly established sources. The solar PV and wind mill electricity generation are inherently intermittent in nature and thus require intermediate electricity storage system such as batteries. In such cases, the first regulation becomes difficult to satisfy, *i.e.* matching electrolysis process to intermittency of renewable energy production and this may be interpreted as violation of the first regulation. The two other regulations/pillars imply that both renewable electricity generation systems and electrolyzers should be in the same geographical region and newly installed. Additionally, the regulations also specify that $CO_2(e)$ emissions should be limited to 3.4 kg and 4 kg per kg of green H_2 produced. An important sustainability factor which becomes crucial is the financial resources required to implement large-scale production facilities. The SMR process has been in use for several decades and so the financial resources needed can be estimated with accuracy. It has been found that implementing an SMR plant together with CCSU capability will result in ~USD 2.5 per kg of blue H_2 produced. The cost for establishing a large industrial scale water electrolysis unit however is not known with the level of accuracy that is built into SMR process costs. It has been estimated to cost ~USD 5.2 per kg of green H_2 by water splitting using the alkaline electrolytic cell. These clearly show that green H_2 production on a large scale to meet the demands of a H_2 economy has many challenges to face and to become economically and environmentally viable. Irrespective of the technology used to transition to H_2 -based energy production, it would cost trillions of USD to implement and this requires a concrete policy decision by individual countries. One important point to be noted in this context of energy transition is that energy, environmental, ecological and financial costs associated with decommissioning the existing fossil fuel-based energy generation and utilization structures have to be factored in the sustainability analysis of H_2 -based energy supply and thus a ' H_2 economy'.

6. Conclusions

Hydrogen-based energy supply has been projected as an alternative to decarbonise the energy sector and thus reduce or arrest the global warming phenomenon. This has led to the phrase 'hydrogen economy' in several discussions across the world's energy fora. Hence, an exhaustive review of known hydrogen production technologies has been performed to assess the potential of hydrogen-based energy supply from the

perspective of sustainability as defined by embodied energy, environmental, ecological and financial parameters. The various conclusions of this analysis are as follows:

(1) The SMR process is a mature technology and has the potential to be scaled up. The current status of this process is that it produces grey H_2 and efforts are underway to make it blue by sequestering the emissions. Another effort that is currently investigated is to make it completely green by using renewable electrical energy. Even if these efforts succeed, the question of supply chain risk of natural gas is extremely high as the quantities required are about 3 orders of magnitude higher than current production. Additionally, the risk of direct methane emission into the atmosphere becomes finite and thus increases the global warming phenomenon considerably, albeit on a shorter time scale. This technology however cannot avoid the baseline emission of CO_2 due to CH_4 oxidation, *i.e.* 1 mole of CO_2 for every mole of CH_4 reformed. Hence, on a larger scale, this technique cannot satisfy all the sustainability criteria and can at best be a partial/temporary method to produce large quantities of H_2 .

(2) Splitting water to produce H_2 by electrolysis is highly promising from emissions perspective of just the process. This process however requires extremely large quantities of electrical energy, the generation of which results in highly unwanted quantities of global warming gases to be emitted. Several technological as well as legislative measures are currently underway to make green H_2 more sustainable. Unless the electrical energy supply is completely decarbonized, this process becomes totally unsustainable from environmental and ecological criteria. It also puts severe stress on fresh water availability, which can be overcome by switching to direct sea water electrolysis. Such alternatives which combine sea water electrolysis with renewable electricity are the best way forward in switching to H_2 gas-based energy generation.

(3) The large-scale production of H_2 using either of the technologies results in significant and disastrous ecological impact. Even if both the technologies change to using renewable energy and resort to CCSU measures, the ecological impact will not be mitigated. This becomes extremely critical and has to be completely addressed before transitioning to H_2 -based energy generation and a ' H_2 economy'.

(4) In the recent times, several naturally occurring H_2 sources have been discovered. Apart from this, methods to produce H_2 exploiting the geological formations such as the serpentinization reaction will be extremely useful in producing green hydrogen with extremely low emissions. Geological explorations to discover new sources will contribute significantly to 'greening' the H_2 -based energy sector.

In summary, electrolysis of sea water using renewable electricity or even low carbon emitting nuclear electricity will be the best way forward in the long run for transitioning to an extremely low-carbon emission method of energy generation. Naturally occurring H_2 as well as that produced by reactions such as serpentinization will contribute to the greening of the energy sector. These alternatives are sustainable and need active global support. Based on the overall energy, and environmental and ecological considerations, it is clear that



transitioning to a completely H₂-based energy supply as envisioned by 'H₂ economy' is not feasible based on currently known technologies. As an energy vector, H₂ can only be a part of the total energy scenario comprising different renewables including nuclear electricity generation.

Methodology

The different requirements such as energy, materials, electrolytes, water and so on as well as the environmental parameter, mainly CO₂ emission, and ecological parameters for each year have been determined based on the H₂ demand corresponding to that particular year. However, the global strategy will be for transition to H₂ economy over a period of two to three decades. This means that, on a year-to-year basis, there will be additional/incremental energy, materials, water and such requirements over the previous year, and correspondingly, the emissions will be increased compared to the previous year.

Example calculation: consider year 2023 as the base year!

Energy requirement: 677.11 EJ

Equivalent H₂: 4.7684 Gt @ 142 MJ kg⁻¹ HHV for H₂

SMR process requirements:

Energy for H₂ production: 4.7684 PW h @ 1 kW h kg⁻¹ of H₂

Natural gas: 14.305 Gt @ 3 kg kg⁻¹ of H₂

Water: 85.8312 Gt @ 18 kg kg⁻¹ of H₂

CO₂ emission: 47.684 Gt @ 10 kg kg⁻¹ of H₂

Energy requirement for the year 2024: 692.33 EJ \cong 4.87551

Gt

Additional H₂ over the year 2023: 0.10713 Gt

Additional energy: 385.668 GJ

Additional natural gas: 0.32139 Gt

Additional water: 1.92834 Gt

Additional CO₂ emission: 1.0713 Gt

AEC water splitting process requirements:

Energy required to produce H₂: 944.136 EJ @ 55 kW h kg⁻¹ of

H₂

Water: 61.989 Gt @ 13 kg kg⁻¹ of H₂

KOH: 4.7684 Mt @ 1 g kg⁻¹ of H₂

CO₂ emission:

Additional energy for 2024 over the year 2023: 21.211 PJ

Additional water: 1.39269 Gt

Additional KOH: 0.10713 Mt

Data availability

All the data used in this manuscript have been included in the manuscript and do not have a separate data set.

Conflicts of interest

The author has not received any funding for this work and there are no conflicts of interest.

Acknowledgements

The author wishes to acknowledge the Indian Institute of Technology Bombay for the provision of facilities.

References

- 1 G. B. Holland and J. J. Provenciano, *The Hydrogen Age – Empowering a Clean Energy Future*, Gibbs Smith, Utah, 2007.
- 2 S. J. Davis, N. S. Lewis, M. Shaner, S. Aggarwal, D. Arent, I. L. Azevedo, *et al.*, Net-zero emissions energy systems, *Science*, 2018, **360**(6396), eaas9793, DOI: [10.1126/science.aas9793](https://doi.org/10.1126/science.aas9793).
- 3 Global Hydrogen Review 2023, IEA, [cited 2024 Sep 6]. Available from: <https://www.iea.org/reports/global-hydrogen-review-2023>.
- 4 V. Madadi Avargani, S. Zendehboudi, N. M. Cata Saady and M. B. Dusseault, A comprehensive review on hydrogen production and utilization in North America: Prospects and challenges, *Energy Convers. Manage.*, 2022, **269**, 115927, DOI: [10.1016/j.enconman.2022.115927](https://doi.org/10.1016/j.enconman.2022.115927).
- 5 H. Ishaq, I. Dincer and C. Crawford, A review on hydrogen production and utilization: Challenges and opportunities, *Int. J. Hydrogen Energy*, 2022, **47**(62), 26238–26264, DOI: [10.1016/j.ijhydene.2021.11.149](https://doi.org/10.1016/j.ijhydene.2021.11.149).
- 6 The Future of Hydrogen, IEA, [cited 2024 Sep 6]. Available from: <https://www.iea.org/reports/the-future-of-hydrogen>.
- 7 IRENA, *Green Hydrogen Cost Reduction: Scaling up Electrolysers to Meet the 1.50C Climate Goal*, International Renewable Energy Agency, Abu Dhabi, 2020.
- 8 P. Nikolaidis and A. Poullikkas, A comparative overview of hydrogen production processes, *Renewable Sustainable Energy Rev.*, 2017, **67**, 597–611, DOI: [10.1016/j.rser.2016.09.044](https://doi.org/10.1016/j.rser.2016.09.044).
- 9 R. Derwent, P. Simmonds, S. O'Doherty, A. Manning, W. Collins and D. Stevenson, Global environmental impacts of the hydrogen economy, *Int. J. Nucl. Hydrogen Prod. Appl.*, 2006, **1**(1), 57, DOI: [10.1504/ijnhpa.2006.009869](https://doi.org/10.1504/ijnhpa.2006.009869).
- 10 Q. Hassan, A. M. Abdulateef, S. A. Hafedh, A. Al-samari, J. Abdulateef, A. Z. Sameen, *et al.*, Renewable energy-to-green hydrogen: A review of main resources routes, processes and evaluation, *Int. J. Hydrogen Energy*, 2023, **48**(46), 17383–17408, DOI: [10.1016/j.ijhydene.2023.01.175](https://doi.org/10.1016/j.ijhydene.2023.01.175).
- 11 A. M. Oliveira, R. R. Beswick and Y. Yan, A green hydrogen economy for a renewable energy society, *Curr. Opin. Chem. Eng.*, 2021, **33**, 100701, DOI: [10.1016/j.coche.2021.100701](https://doi.org/10.1016/j.coche.2021.100701).
- 12 P. M. Falcone, M. Hiete and A. Sapio, Hydrogen economy and sustainable development goals: Review and policy insights, *Curr. Opin. Green Sustainable Chem.*, 2021, **31**, 100506, DOI: [10.1016/j.cogsc.2021.100506](https://doi.org/10.1016/j.cogsc.2021.100506).
- 13 J. O. M. Bockris, The hydrogen economy: Its history, *Int. J. Hydrogen Energy*, 2013, **38**(6), 2579–2588, DOI: [10.1016/j.ijhydene.2012.12.026](https://doi.org/10.1016/j.ijhydene.2012.12.026).
- 14 V. Zgonnik, The occurrence and geoscience of natural hydrogen: A comprehensive review, *Earth-Sci. Rev.*, 2020, **203**, 103140, DOI: [10.1016/j.earscirev.2020.103140](https://doi.org/10.1016/j.earscirev.2020.103140).
- 15 C. J. Boreham, D. S. Edwards, K. Czado, N. Rollet, L. Wang, S. van der Wielen, *et al.*, Hydrogen in Australian natural gas: occurrences, sources and resources, *APPEA J.*, 2021, **61**(1), 163, DOI: [10.1071/aj20044](https://doi.org/10.1071/aj20044).



- 16 B. S. Lollar, T. C. Onstott, G. Lacrampe-Couloume and C. J. Ballentine, The contribution of the Precambrian continental lithosphere to global H₂ production, *Nature*, 2014, **516**(7531), 379–382, DOI: [10.1038/nature14017](https://doi.org/10.1038/nature14017).
- 17 O. Warr, T. Giunta, C. J. Ballentine and L. B. Sherwood, Mechanisms and rates of 4He, 40Ar, and H₂ production and accumulation in fracture fluids in Precambrian Shield environments, *Chem. Geol.*, 2019, **530**, 119322, DOI: [10.1016/j.chemgeo.2019.119322](https://doi.org/10.1016/j.chemgeo.2019.119322).
- 18 F. Klein, J. D. Tarnas and W. Bach, Abiotic Sources of Molecular Hydrogen on Earth, *Elements*, 2020, 19–24.
- 19 J. Incer-Valverde, A. Korayem, G. Tsatsaronis and T. Morosuk, “Colors” of hydrogen: Definitions and carbon intensity, *Energy Convers. Manage.*, 2023, **291**, 117294, DOI: [10.1016/j.enconman.2023.117294](https://doi.org/10.1016/j.enconman.2023.117294).
- 20 E. Hand, Hidden hydrogen, *Science*, 2023, **379**(6633), 630–636, DOI: [10.1126/science.adh1477](https://doi.org/10.1126/science.adh1477).
- 21 A. Ajanovic, M. Sayer and R. Haas, The economics and the environmental benignity of different colors of hydrogen, *Int. J. Hydrogen Energy*, 2022, **47**(57), 24136–24154, DOI: [10.1016/j.ijhydene.2022.02.094](https://doi.org/10.1016/j.ijhydene.2022.02.094).
- 22 F. Osselin, C. Soulaire, C. Fauguerolles, E. C. Gaucher, B. Scaillet and M. Pichavant, Orange hydrogen is the new green, *Nat. Geosci.*, 2022, **15**(10), 765–769, DOI: [10.1038/s41561-022-01043-9](https://doi.org/10.1038/s41561-022-01043-9).
- 23 W. B. Leung, N. H. March and H. Motz, Primitive phase diagram for hydrogen, *Phys. Lett. A*, 1976, **56**(6), 425–426, DOI: [10.1016/0375-9601\(76\)90713-1](https://doi.org/10.1016/0375-9601(76)90713-1).
- 24 https://www.hysafe.org/download/1196/BRHS_Chap1_V1p2.pdf.
- 25 D. A. J. Rand and R. M. Dell, *Hydrogen Energy: Challenges and Prospects*, Royal Society of Chemistry, Cambridge, England, 2007.
- 26 A. R. Brandt, Greenhouse gas intensity of natural hydrogen produced from subsurface geologic accumulations, *Joule*, 2023, **7**(8), 1818–1831, DOI: [10.1016/j.joule.2023.07.001](https://doi.org/10.1016/j.joule.2023.07.001).
- 27 A. Prinzhofer, C. S. Tahara Cissé and A. B. Diallo, Discovery of a large accumulation of natural hydrogen in Bourakebougou (Mali), *Int. J. Hydrogen Energy*, 2018, **43**(42), 19315–19326, DOI: [10.1016/j.ijhydene.2018.08.193](https://doi.org/10.1016/j.ijhydene.2018.08.193).
- 28 E. Albers, W. Bach, M. Pérez-Gussinyé, C. McCammon and T. Frederichs, Serpentinization-driven H₂ production from continental break-up to mid-Ocean Ridge spreading: Unexpected high rates at the West Iberia margin, *Front. Earth Sci.*, 2021, **9**, 673063, DOI: [10.3389/feart.2021.673063](https://doi.org/10.3389/feart.2021.673063).
- 29 A. Boretti and B. K. Banik, Advances in hydrogen production from natural gas reforming, *Adv. Energy Sustainability Res.*, 2021, **2**(11), 2100097, DOI: [10.1002/aesr.202100097](https://doi.org/10.1002/aesr.202100097).
- 30 I. K. Muritala, D. Guban, M. Roeb and C. Sattler, High temperature production of hydrogen: Assessment of non-renewable resources technologies and emerging trends, *Int. J. Hydrogen Energy*, 2020, **45**(49), 26022–26035, DOI: [10.1016/j.ijhydene.2019.08.154](https://doi.org/10.1016/j.ijhydene.2019.08.154).
- 31 F. Rau, A. Herrmann, H. Krause, D. Fino and D. Trimis, Efficiency of a pilot-plant for the autothermal reforming of biogas, *Int. J. Hydrogen Energy*, 2019, **44**(35), 19135–19140, DOI: [10.1016/j.ijhydene.2018.04.014](https://doi.org/10.1016/j.ijhydene.2018.04.014).
- 32 A. J. Kidnay, A. J. Kidnay and W. R. Parrish, *Fundamentals of Natural Gas Processing*, CRC Press, 2006.
- 33 J. Feng, X. Sun, Z. Li, X. Hao, M. Fan, P. Ning, *et al.*, Plasma-assisted reforming of methane, *Adv. Sci.*, 2022, **9**(34), 2203221, DOI: [10.1002/advs.202203221](https://doi.org/10.1002/advs.202203221).
- 34 S. Masoudi Soltani, A. Lahiri, H. Bahzad, P. Clough, M. Gorbounov and Y. Yan, Sorption-enhanced steam methane reforming for combined CO₂ capture and hydrogen production: A state-of-the-art review, *Carbon Capture Sci. Technol.*, 2021, **1**, 100003, DOI: [10.1016/j.ccst.2021.100003](https://doi.org/10.1016/j.ccst.2021.100003).
- 35 M. Chatenet, B. G. Pollet, D. R. Dekel, F. Dionigi, J. Deseure, P. Millet, *et al.*, Water electrolysis: from textbook knowledge to the latest scientific strategies and industrial developments, *Chem. Soc. Rev.*, 2022, **51**(11), 4583–4762, DOI: [10.1039/d0cs01079k](https://doi.org/10.1039/d0cs01079k).
- 36 C. Dhoke, A. Zaabout, S. Cloete and S. Amini, Review on reactor configurations for adsorption-based CO₂ capture, *Ind. Eng. Chem. Res.*, 2021, **60**(10), 3779–3798, DOI: [10.1021/acs.iecr.0c04547](https://doi.org/10.1021/acs.iecr.0c04547).
- 37 N. Pal and M. Agarwal, Advances in materials process and separation mechanism of the membrane towards hydrogen separation, *Int. J. Hydrogen Energy*, 2021, **46**(53), 27062–27087, DOI: [10.1016/j.ijhydene.2021.05.175](https://doi.org/10.1016/j.ijhydene.2021.05.175).
- 38 US Energy Information Administration, International Energy Outlook 2023, 2023, https://www.eia.gov/outlooks/ieo/pdf/IEO2023_narrative.pdf.
- 39 P. L. Spath and M. K. Mann. Life Cycle Assessment of Hydrogen Production via Natural Gas Steam Reforming. 2001. <https://www.nrel.gov/docs/fy01osti/27637.pdf>.
- 40 G. Gonzales-Calienes, M. Kannangara, J. Yang, J. Shadbahr, C. Deces-Petit, F. Bensebaa, *et al.*, *Life Cycle Assessment of Hydrogen Production Pathways in Canada*, National Research Council of Canada, 2022.
- 41 A. Al-Qahtani, B. Parkinson, K. Hellgardt, N. Shah and G. Guillen-Gosalbez, Uncovering the true cost of hydrogen production routes using life cycle monetisation, *Appl. Energy*, 2021, **281**, 115958, DOI: [10.1016/j.apenergy.2020.115958](https://doi.org/10.1016/j.apenergy.2020.115958).
- 42 C. Antonini, K. Treyer, A. Streb, M. van der Spek, C. Bauer and M. Mazzotti, Hydrogen production from natural gas and biomethane with carbon capture and storage – A techno-environmental analysis, *Sustainable Energy Fuels*, 2020, **4**(6), 2967–2986, DOI: [10.1039/d0se00222d](https://doi.org/10.1039/d0se00222d).
- 43 A. Mehmeti, A. Angelis-Dimakis, G. Arampatzis, S. McPhail and S. Ulgiati, Life cycle assessment and water footprint of hydrogen production methods: From conventional to emerging technologies, *Environments*, 2018, **5**(2), 24, DOI: [10.3390/environments5020024](https://doi.org/10.3390/environments5020024).
- 44 Y. K. Salkuyeh, B. A. Saville and H. L. MacLean, Techno-economic analysis and life cycle assessment of hydrogen production from different biomass gasification processes, *Int. J. Hydrogen Energy*, 2018, **43**(20), 9514–9528, DOI: [10.1016/j.ijhydene.2018.04.024](https://doi.org/10.1016/j.ijhydene.2018.04.024).
- 45 O. Siddiqui and I. Dincer, A well to pump life cycle environmental impact assessment of some hydrogen



- production routes, *Int. J. Hydrogen Energy*, 2019, **44**(12), 5773–5786, DOI: [10.1016/j.ijhydene.2019.01.118](https://doi.org/10.1016/j.ijhydene.2019.01.118).
- 46 M. Mohamadi-Baghmolaei, P. Zahedizadeh, A. Hajizadeh and S. Zendejboudi, Hydrogen production through catalytic supercritical water gasification: Energy and char formation assessment, *Energy Convers. Manage.*, 2022, **268**, 115922, DOI: [10.1016/j.enconman.2022.115922](https://doi.org/10.1016/j.enconman.2022.115922).
 - 47 S. Vitta, Materials and environmental sustainability of scaling Silicon Photovoltaics to 50 TWp, *J. Mater. Res.*, 2024, submitted.
 - 48 G. Zhao, M. R. Kraglund, H. L. Frandsen, A. C. Wulff, S. H. Jensen, M. Chen, *et al.*, Life cycle assessment of H₂O electrolysis technologies, *Int. J. Hydrogen Energy*, 2020, **45**(43), 23765–23781, DOI: [10.1016/j.ijhydene.2020.05.282](https://doi.org/10.1016/j.ijhydene.2020.05.282).
 - 49 C. Wulf and M. Kaltschmitt, Hydrogen supply chains for mobility—environmental and economic assessment, *Sustainability*, 2018, **10**(6), 1699, DOI: [10.3390/su10061699](https://doi.org/10.3390/su10061699).
 - 50 A. Valente, D. Iribarren and J. Dufour, Prospective carbon footprint comparison of hydrogen options, *Sci. Total Environ.*, 2020, **728**, 138212, DOI: [10.1016/j.scitotenv.2020.138212](https://doi.org/10.1016/j.scitotenv.2020.138212).
 - 51 S. Ghandehariun and A. Kumar, Life cycle assessment of wind-based hydrogen production in Western Canada, *Int. J. Hydrogen Energy*, 2016, **41**(22), 9696–9704, DOI: [10.1016/j.ijhydene.2016.04.077](https://doi.org/10.1016/j.ijhydene.2016.04.077).
 - 52 J. Koj, C. Wulf, A. Schreiber and P. Zapp, Site-dependent environmental impacts of industrial hydrogen production by alkaline water electrolysis, *Energies*, 2017, **10**(7), 860, DOI: [10.3390/en10070860](https://doi.org/10.3390/en10070860).
 - 53 W. Kuckshinrichs and J. C. Koj, Levelized cost of energy from private and social perspectives: The case of improved alkaline water electrolysis, *J. Cleaner Prod.*, 2018, **203**, 619–632, DOI: [10.1016/j.jclepro.2018.08.232](https://doi.org/10.1016/j.jclepro.2018.08.232).
 - 54 A. Valente, D. Iribarren, J. Dufour and G. Spazzafumo, Life-cycle performance of hydrogen as an energy management solution in hydropower plants: A case study in Central Italy, *Int. J. Hydrogen Energy*, 2015, **40**(46), 16660–16672, DOI: [10.1016/j.ijhydene.2015.09.104](https://doi.org/10.1016/j.ijhydene.2015.09.104).
 - 55 CO₂ Emissions in 2023, IEA, [cited 2024 Sep 6], Available from: <https://www.iea.org/reports/co2-emissions-in-2023>.
 - 56 Hydrogen: Forging the future with SMR-X™ technology/Air Liquide, [cited 2024 Sep 6], Available from: <http://www.airliquide.com>.
 - 57 A. Hajizadeh, M. Mohamadi-Baghmolaei, N. M. Cata Saady and S. Zendejboudi, Hydrogen production from biomass through integration of anaerobic digestion and biogas dry reforming, *Appl. Energy*, 2022, **309**, 118442, DOI: [10.1016/j.apenergy.2021.118442](https://doi.org/10.1016/j.apenergy.2021.118442).
 - 58 H. Demey, G. Ratel, B. Lacaze, O. Delattre, G. Haarlemmer and A. Roubaud, Hydrogen production by catalytic supercritical water gasification of black liquor-based wastewater, *Energies*, 2023, **16**(8), 3343, DOI: [10.3390/en16083343](https://doi.org/10.3390/en16083343).
 - 59 H. H. Cho, V. Strezov and T. J. Evans, Environmental impact assessment of hydrogen production via steam methane reforming based on emissions data, *Energy Rep.*, 2022, **8**, 13585–13595, DOI: [10.1016/j.egyr.2022.10.053](https://doi.org/10.1016/j.egyr.2022.10.053).
 - 60 Puertollano green hydrogen plant – Iberdrola, [cited 2024 Sep 6] Available from: <https://www.iberdrola.com>.
 - 61 T. Liu, Z. Zhao, W. Tang, Y. Chen, C. Lan, L. Zhu, *et al.*, In-situ direct seawater electrolysis using floating platform in ocean with uncontrollable wave motion, *Nat. Commun.*, 2024, **15**(1), 5305, DOI: [10.1038/s41467-024-49639-6](https://doi.org/10.1038/s41467-024-49639-6).
 - 62 IRENA, *Green Hydrogen: A Guide to Policy Making*, International Renewable Energy Agency, Abu Dhabi, 2020.
 - 63 The “three pillars” are gaining momentum in the green hydrogen industry, [cited 2024 Sep 6] Available from: <https://www.gh2.org>.

