



Microfluidic generation of encapsulated droplet interface bilayer networks (multisomes) and their use as cell-like reactors

Journal:	<i>ChemComm</i>
Manuscript ID	CC-COM-02-2016-001434.R1
Article Type:	Communication
Date Submitted by the Author:	21-Mar-2016
Complete List of Authors:	Elani, Yuval; Imperial College London, Chemistry Casadevall i Solvas, Xavier; ETH Zurich, Institute of Chemical and Bioengineering Edel, Joshua; Imperial College London, Dept of Chemistry Law, Robert; Imperial College London, Chemistry Ces, Oscar; Imperial College,



Journal Name

COMMUNICATION

Microfluidic generation of encapsulated droplet interface bilayer networks (multisomes) and their use as cell-like reactors

Received 00th January 20xx,
Accepted 00th January 20xx

Yuval Elani,^{*ab} Xavier C. I Solvas,^{ac} Joshua B. Edel,^{ab} Robert V. Law^{ab} and Oscar Ces^{*ab}

DOI: 10.1039/x0xx00000x

www.rsc.org/

Compartmentalised structures based on droplet interface bilayers (DIBs), including multisomes and compartmentalised vesicles, are seen by many as the next generation of biomimetic soft-matter devices. Herein, we outline a microfluidic approach to construct miniaturised multisomes of pL volumes in high-throughput and demonstrate their potential as vehicles for in-situ chemical synthesis.

Droplet interface bilayers (DIBs) are lipid membranes which are formed when two lipid monolayer-coated water-in-oil droplets are brought into contact.¹ Oil is excluded from the interface and a bilayer is formed. Critically, when three or more droplets are joined together, a bilayer networks can be generated.¹⁻⁴ DIBs are an emerging as new platform for the construction of soft matter devices with incorporated biological functional components, including protein pores (both natural and engineered), enzymes, DNA, protein synthesis machinery and polymerisable lipids.^{1,5-8} In this sense DIB devices can be considered a sub-discipline in bottom-up synthetic biology, where functional cell-like structures are constructed using simple chemical and biological building blocks. To date, the power of DIB devices for a range of applications have been demonstrated. They have been shown capable of mimicking simple electrical circuits and logic gates,^{3,9} of acting as biobatteries, and of harvesting light for autonomous energy generation.^{1,3,4,9} They have been engineered to be responsive to their environment,⁷ and as tools to screen ion channel blockers,¹⁰ to study the effects of membrane asymmetry,¹¹ and to dynamically control the concentration of embedded proteins on a membrane patch.¹² Extended 3D networks can be constructed using droplet

microfluidics^{2,13,14} and droplet printing,¹⁵ and have been engineered to show cooperative behaviours and possess tissue-like features.¹⁵

One inherent feature of DIBs is that they exist in a bulk oil environment. This prevents their use in physiological (i.e. aqueous) environments and has proved a bottleneck for the use of DIBs for a range of potentially powerful applications, for example, as compartmentalised drug delivery machines¹⁶ or as biosensors. To address this, Villar et al. encapsulated several lipid-stabilised water droplets in a larger oil-in-water droplet, allowing a droplet network to operate in an aqueous environment.¹⁷ These structures, known as multisomes, were shown to respond to both pH and temperature and could have protein pores reconstituted in their membranes. Similarly, we have previously generated analogous bilayer networks which do not contain an intermediate oil phase, in the form of multi-compartment vesicles.^{18,19} The use of these vesicles as spatially segregated reactors that mimic cellular signalling cascades was later shown.²⁰

The big limitation of both these structures arises from how they are generated: they are constructed by manually pipetting individual droplets one-by-one. Droplets sizes are therefore restricted by the minimum pipetting volume, and are thus in the μL volume regime. In addition, each unit has to be assembled manually and individually, leading to a very low generation throughput of formation, in the order of minutes per single structure. This drastically limits their future applications. For compartmentalised membrane systems to see use as artificial cells, or as soft-matter devices operating in physiological environment, their characteristic dimensions need to be reduced, and generation throughout increased.

^a Department of Chemistry, Imperial College London, Exhibition Road, London SW7 2AZ, UK.

^b, Institute of Chemical Biology, Exhibition Road, London SW7 2AK, UK.

^c Current address: Institute for Chemical and Bioengineering, Department of Chemistry and Applied Biosciences, ETH Zürich, CH-8093, Switzerland.

* Yuval Elani: yuval.elani10@imperial.ac.uk; Oscar Ces: o.ces@imperial.ac.uk
Electronic Supplementary Information (ESI) available: experimental; device design and fabrication; video of on-chip multisome generation. See DOI: 10.1039/x0xx00000x

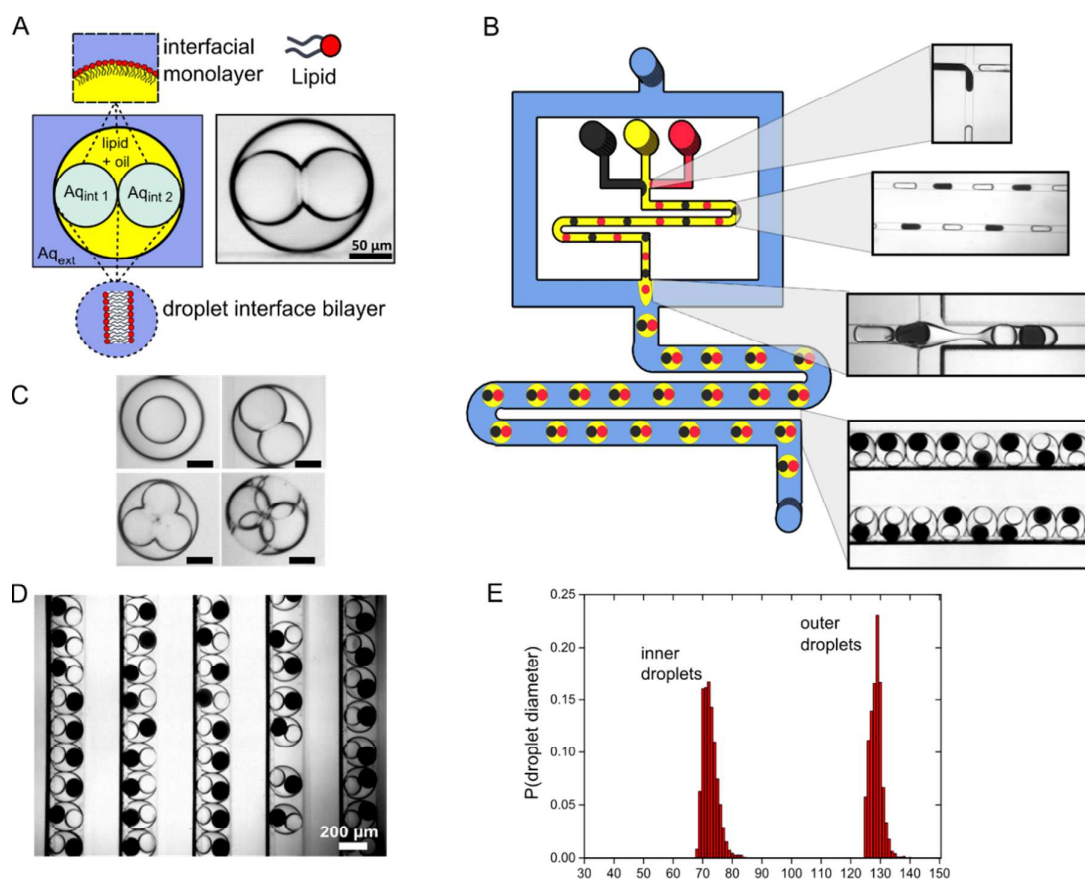


Fig. 1 – Microfluidic generation of multisomes. (A) Schematic of a multisome with bilayers present at all water-oil interfaces and corresponding brightfield images of different regions. First, alternating droplets of two different compositions are generated by two opposing T-junctions. These travel through a meander, allowing time for monolayer stabilisation. Two such droplets are then encapsulated downstream in an oil droplet using a flow-focussing channel geometry, generating two-droplet multisomes (C) By altering the generation frequencies of the internal aqueous droplets, 1,2,3, and 4 compartment multisomes can be generated (D) Monodisperse two-droplet multisomes with different inner droplet compositions stored in collection channels. Black droplets contain methyl-blue dye. (E) Inner and outer droplet size distribution for two-droplet double emulsion.

In this paper, we turn to droplet-based microfluidics²¹ to provide a solution to this and to relieve the bottleneck. We design and fabricate devices that generate multisomes which are an order of magnitude smaller (ca. 4 pL) and crucially, with a generation throughput that is three orders of magnitude greater (hundreds of multisomes generated a minute). We can also control the number of droplets in the encapsulated network as well as their content. We prove there is a bilayer present via a diffusion assay, and demonstrate the potential of the structures as in-situ drug synthesis machines by synthesising a pharmacologically relevant chemical moiety in their interior.

To generate multisomes we fabricated a device that consisted of two sequential droplet-generation modules separated by a meandering channel (Fig. 1, ESI and ESI Video). The first junction consisted of two opposing T-junctions with two different aqueous inlets, yielding water-in-oil (w/o) droplets of alternating compositions. 25 mg ml⁻¹ diphytanoylphosphatidylcholine (DPhPC) lipid was dissolved in the oil phase, which self-assembled as a monolayer around the droplets as they travelled through the meander. This enabled bilayers to form at the droplet-droplet interfaces, and

prevented droplet coalescence upon encountering the outer aqueous phase.

The second junction contained a flow-focusing channel geometry which encapsulated a set number of aqueous droplets in larger oil droplets, producing double emulsion based multisomes. This was followed by additional meanders and channel widening where droplets were stored and monitored.

DIBs were formed between the multiple droplets themselves, and between the inner droplets and the external aqueous phase. Multisome dimensions and architecture were predominately determined by the device geometry, with the inner aqueous droplet and external oil droplet diameters determined by the characteristic dimensions of the first and second flow focussing junctions respectively. Flow rates are a second-order determinant of droplet size, with smaller droplets produced by increasing the continuous phase flow.²² Likewise, flow rates of the segmented phase determine droplet generation frequencies. By increasing the frequency at which the inner droplets were generated compared to the outer droplets, multisomes with a larger number of inner-compartments could be produced on the same device (see ESI


video). Droplet encapsulation number could thus be user-defined, yielding multisomes with varying number of inner droplets (between one and four inner droplets, Fig. 1C).

Multisomes were generated at a rate of 300 per minute and stored in channels (Fig. 1D). 95% encapsulation efficiency was achieved, however the emulsion survival rate stood at 88% ($n=300$) for two-compartment multisomes, with a proportion of droplet pairs merging shortly after formation. If individual droplets were still intact after 30 seconds, they were stable for the course of the experiments (60 minutes). An important factor in multisome stability was the degree of confinement of the inner droplets. Higher confinement led droplets to squeeze against each other, exerting forces which increased the probability of bilayer rupture. As three- and four-compartment multisomes are inherently more confined, their survival rates were correspondingly lower. Changing device geometry to decrease confinement (for example, to produce a larger intermediate oil droplet) would be necessary to produce stable multisomes with more internal compartments.

Average inner and outer droplet volumes were 1.56 pL (72 μm radius) and 8.01 pL (128 μm radius) respectively, with corresponding coefficients of variations of 3.4% and 1.5% (Fig. 1E). Droplet volumes were therefore highly uniform, a common feature associated with droplet-based microfluidic technologies. The use of microfluidics therefore enables the generation of compartmentalised membrane systems with finer size resolution and an order of magnitude smaller volumes than can be reached with pipetting. Further miniaturisation will allow cell-sized dimensions to be reached (and surpassed), paving the way for drug-delivery applications.

We then demonstrated the ability for multisomes to be used as multi-compartment chemical microreactors via the synthesis of a biologically relevant compound (experimental details available in the ESI). We constructed multisomes consisting of two inner droplets which acted as modules in the chemical reactor: one droplet acted as a chemical reservoir, the other as a reaction chamber. We produced multisomes with two different cargoes contained in each of the encapsulated droplets. In one droplet, a membrane impermeable fluorogenic pyrylium compound (Chromeo P540)²³ was encapsulated, and in the other a membrane permeable primary amine (ethanolamine, $\text{HOCH}_2\text{CH}_2\text{NH}_2$). The amine-containing droplet acted as a reservoir which steadily fed the amine through the DIB into the adjacent droplet, in which a chemical transformation took place (Fig. 2). Ethanolamine was able to gradually diffuse through the bilayer due to its neutral charge and small size ($\log P = -1.31$).²⁴ As the amine entered the adjacent compartment, it reacted with pyrylium to yield a pyridinium salt, which was fluorescent ($\text{ex} = 533 \text{ nm}$, $\text{em} = 627 \text{ nm}$, see ESI). A fluorescence increase in the adjacent compartment over time was observed (Fig. 2B), with a gradual increase over a period of 800 s before a plateau in fluorescent intensity as the reagent was depleted. Fluorescence was not seen to decrease from its maxima, and the surroundings exhibited no observable fluorescence increase. This suggests the reaction product does not leak into

the oil or water external phases over the time course of the experiment, most likely a result of the pyridinium positive

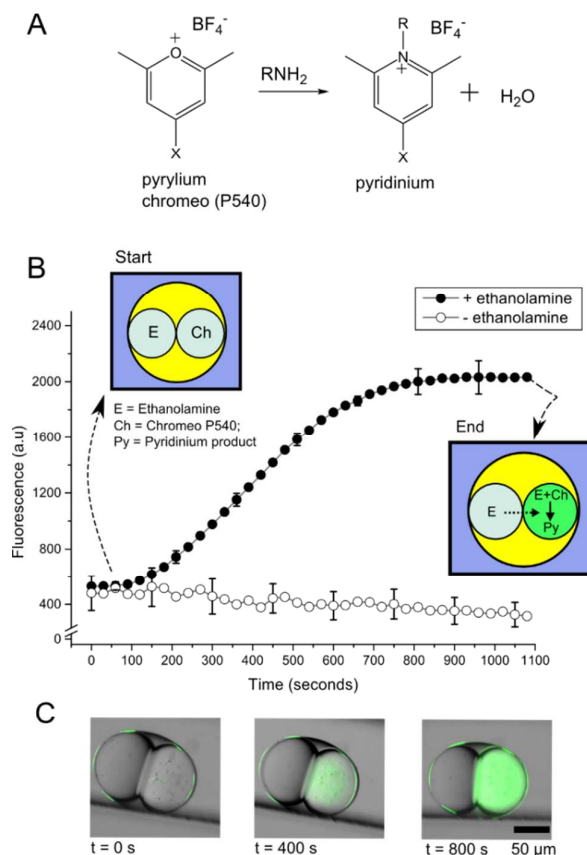

charge prohibiting translocation across the bilayer, or partitioning into the oil phase.

Previous studies show that the rate determining step for the reaction between pyrylium and analogous primary amines is the intermediate ring closure to yield the pyridinium product ($k = 4.04 \times 10^{-3} \text{ s}^{-1}$).²⁵ The corresponding approximate reaction

Fig. 2 – Multisomes as reactors for on-board synthesis. (A) Reaction scheme between pyrylium and a primary amine, yielding fluorescent pyridinium (B) Fluorescence intensity of the pyrylium-containing compartment over time. Error bars = one standard deviation, $n=5$. The two reagents were originally isolated in the two compartments. As ethanolamine diffused through the DIB, fluorescent pyridinium product was formed. (C) Fluorescence/brightfield composite image of the reactor at start, middle, and endpoints of experiment, showing gradual reactant diffusion and reaction progression. Brightness and contrasts enhanced equally across all images.

completion timescales ($\sim 750 \text{ s}$) are comparable to the ones we observe ($\sim 810 \text{ s}$). The fact that reaction times are not significantly slower in our system indicates that the rate of ring closing is comparable to, or faster than, diffusion across the membrane.

In control experiments, identical multisomes were generated but with no ethanolamine present. No fluorescence increase was seen, showing the reaction was not occurring due to external sources of primary amine (originating, for example, from the device fabrication process).

Together with the lack of fluorescence increase in the absence of a bilayer, these experiments proved the existence

of a DIB. In addition, the results establish the applicability of such systems for *in situ* drug synthesis, as the pyridinium reaction products and their analogues are found in a wide range of medicinal and agricultural products, including anaesthetics, antiprotozoals, and antiallergenics.^{26,27} Their bioactivity and commercial use therefore made them attractive candidates to use as a proof-of-concept for our system.

Although the above experiment demonstrates the use of multisomes for simple one-step reactions, by adding more compartments, this can be extended to multi-step chemical reactions, each step being performed in distinct compartments.²⁰ Furthermore, the fact that it is possible to tune droplet size using simple microfluidic engineering principles, and that droplet size in turn determines bilayer area, raises the possibility of modulating reaction kinetics using the architecture of the system.

These results demonstrate a new class of biomimetic microreactors, bearing advantages associated with sub-compartmentalisation. Compartmentalisation allows isolated specialised modules to be introduced, with more elaborate operations introduced in the future, including waste droplets and processing elements, allowing for greater complexity than traditional uni-compartment systems. The system's modular nature also allows for multiple potentially interfering processes (non-orthogonal reactions) to occur in single droplet collection by segregating them in space.

The presence of lipid bilayers between compartments render the multisomes generated here as distinct entities to conventional double emulsions.^{28,29} Crucially, they provide an interface through which reagent transfer can take place, and increases the biomimetic potential of the structures enabling them to be used for synthetic biology and biotechnology applications. The use of membranes to delineate compartments allows functionalization by biological components including transmembrane proteins, mechanosensitive channels, and antibodies, as well as ensuring biocompatibility. It also enables researchers to take advantage of the varied biophysical behaviours of membranes, and to exploit them to modulate processes — such as pore formation with a change in temperature, electromagnetic radiation, or in response to chemical stimulus — to yield smart and responsive features. The above attributes provide an opportunity for the design of dormant systems which become active upon encountering a set stimuli, with applications for *in vivo* drug synthesis and delivery.

In conclusion by leveraging microfluidic technologies we were able to scale-up the generation throughput of multisomes to hundreds a minute, and scale down their size to the pL regime, all while maintaining control over the number of droplets in the encapsulated network and their content. This allows the power and potential of droplet networks to be extended to an aqueous setting. We also demonstrate the use of multisomes generated via microfluidics as a platform to perform rudimentary synthetic chemistry in a cell-like device, paving the way for the generation of truly functional and responsive compartmentalised soft-matter devices for a range

of applications, including *in situ* drug synthesis and as self-contained diagnostic devices. Microfluidic technologies such as these could be used as an enabling technology for synthetic biology, facilitating scale up in generation throughput and scale down in size that is needed for them to see functional use.

This work was supported by the EPSRC via grants EP/J017566/1 and EP/K038648/1, and by a Centre for Doctoral Training Studentship from the Institute of Chemical Biology (Imperial College London) and EPSRC Doctoral Prize Fellowship awarded to YE.

Notes and references

- H. Bayley, B. Cronin, A. Heron, M. A. Holden, W. L. Hwang, R. Syeda, J. Thompson and M. I. Wallace, *Mol. Biosyst.*, 2008, **4**, 1191-1208.
- Y. Elani, A. deMello, X. Niu and O. Ces, *Lab Chip*, 2012, **12**, 3514-3520.
- M. A. Holden, D. Needham and H. Bayley, *J. Am. Chem. Soc.*, 2007, **129**, 8650-8655.
- G. Maglia, A. J. Heron, W. L. Hwang, M. A. Holden, E. Mikhailova, Q. Li, S. Cheley and H. Bayley, *Nat. Nanotechnol.*, 2009, **4**, 437-440.
- H. M. Barriga, P. Booth, S. Haylock, R. Bazin, R. H. Templer and O. Ces, *J. R. Soc. Interface*, 2014, **11**, 20140404.
- W. L. Hwang, *J. Am. Chem. Soc.*, 2008, **130**, 5878.
- S. Punnamaraju, H. You and A. Steckl, *Langmuir*, 2012, **28**, 7657-7664.
- M. S. Friddin, H. Morgan and M. R. de Planque, *Biomicrofluidics*, 2013, **7**, 014108.
- W. L. Hwang, M. A. Holden, S. White and H. Bayley, *J. Am. Chem. Soc.*, 2007, **129**, 11854-11864.
- R. Syeda, M. A. Holden, W. L. Hwang and H. Bayley, *J. Am. Chem. Soc.*, 2008, **130**, 15543-15548.
- W. L. Hwang, M. Chen, B. d. Cronin, M. A. Holden and H. Bayley, *J. Am. Chem. Soc.*, 2008, **130**, 5878-5879.
- L. C. Gross, O. K. Castell and M. I. Wallace, *Nano Lett.*, 2011, **11**, 3324-3328.
- P. Carreras, Y. Elani, R. Law, N. Brooks, J. Seddon and O. Ces, *Biomicrofluidics*, 2015, **9**, 064121.
- C. E. Stanley, K. S. Elvira, X. Z. Niu, A. D. Gee, O. Ces, J. B. Edel and A. J. deMello, *Chem. Commun.*, 2010, **46**, 1620.
- G. Villar, A. D. Graham and H. Bayley, *Science*, 2013, **340**, 48-52.
- Y. Elani, R. V. Law and O. Ces, *Ther. Deliv.*, 2015, **6**, 541-543.
- G. Villar, A. J. Heron and H. Bayley, *Nat. Nanotechnol.*, 2011, **6**, 803-808.
- Y. Elani, A. Gee, R. V. Law and O. Ces, *Chem. Sci.*, 2013, **4**, 3332-3338.
- Y. Elani, R. V. Law and O. Ces, *Phys. Chem. Chem. Phys.*, 2015, **17**, 15534-15537.
- Y. Elani, R. V. Law and O. Ces, *Nat. Commun.*, 2014, **5**.
- X. Casadevall i Solvas and A. deMello, *Chem. Commun.*, 2011, **47**, 1936-1942.
- T. Ward, M. Faivre, M. Abkarian and H. A. Stone, *Electrophoresis*, 2005, **26**, 3716-3724.
- D. B. Craig, B. K. Wetzl, A. Duerkop and O. S. Wolfbeis, *Electrophoresis*, 2005, **26**, 2208-2213.
- C. Hansch, A. Leo, D. Hoekman and S. R. Heller *Exploring Qsar*; American Chemical Society Washington, DC, 1995.
- A. R. Katritzky, J. L. Mokrosz and M. De Rosa, *Journal of the Chemical Society, Perkin Trans. 2.*, 1984, 849-855.
- P. Madaan and V. K. Tyagi, *J. Oleo Sci.*, 2008, **57**, 197-215.
- E. F. Scriven and R. Murugan, *Kirk-Othmer Encyclopedia of Chemical Technology*, 1996.
- A. Y. Khan, S. Talegaonkar, Z. Iqbal, F. J. Ahmed and R. K. Khar, *Curr. Drug Deliv.*, 2006, **3**, 429-443.
- R. K. Shah, H. C. Shum, A. C. Rowat, D. Lee, J. J. Agresti, A. S. Utada, L.-Y. Chu, J.-W. Kim, A. Fernandez-Nieves and C. J. Martinez, *Mater. Today*, 2008, **11**, 18-27.